



CUSTOMIZED PUMPS

Right Pump. Right Now.®


Submersible Turbine Pumps

4" through 10" diameter

25 - 1,000 GPM / 57 - 386 m³/hr

Accessories

Special options on materials of construction
available - Consult factory

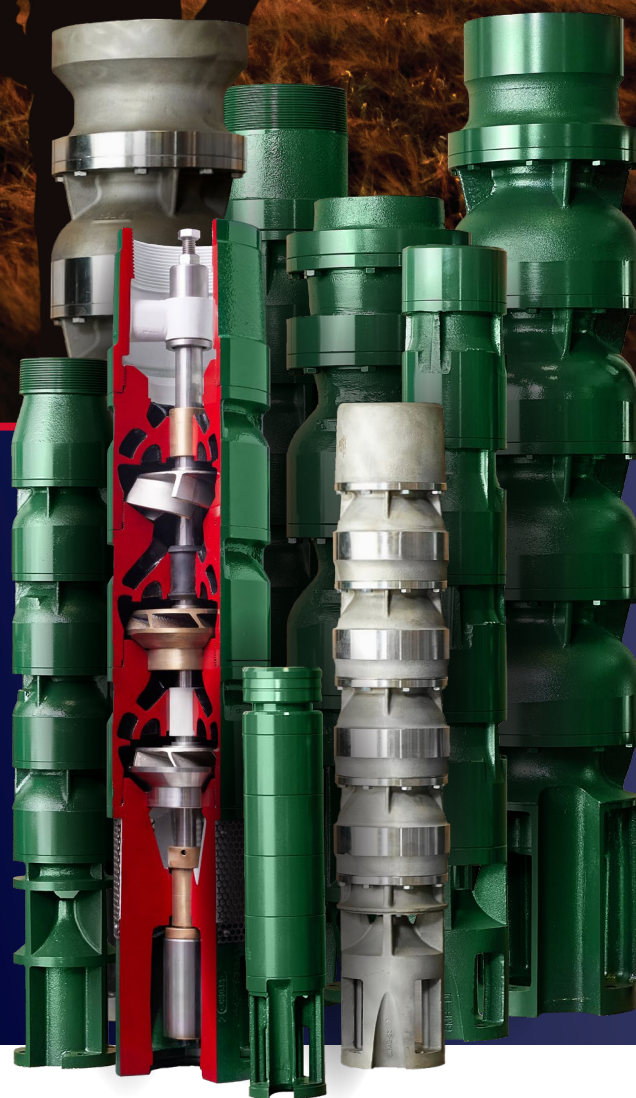

For quotes and order inquiries please contact sales@wolfpumps.com



Follow the QR code to our
pump sizing tool or visit
WolfPumps.com for more
information

PO Box 490
18014 N I-27 Hwy.
Abernathy, TX 79311
800-886-2606
WolfPumps.com



CUSTOMIZED PUMPS

Right Pump. Right Now.®

PO Box 490

18014 N I-27 Hwy.

Abernathy, TX 79311

800-886-2606


WolfPumps.com

95 North Oak St.

Kendallville, IN 46755

800-345-9422

FlintandWalling.com

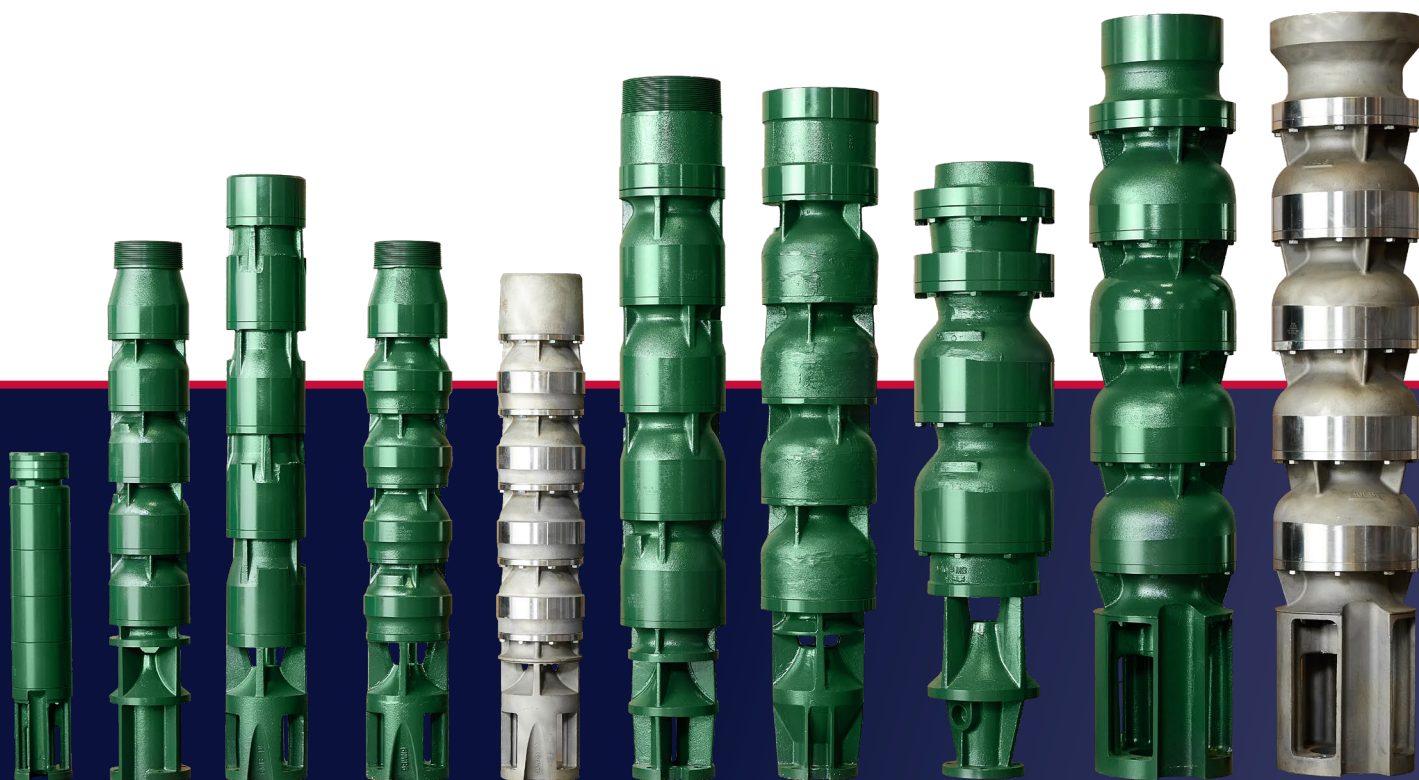

4

5

5HX

6

6SS

7

8

9

10

10SS

Table of Contents

	Page
Introduction	4
4" Pump Curves	10
5" Pump Curves	12
6" Pump Curves	22
7" Pump Curves	32
8" Pump Curves	37
9" Pump Curves	43
10" Pump Curves	46
Pump Accessories	51
Submittal Documents	53
Reference	58
Company Policies	64

History of Wolf Pump

Bill Wolf and Sons began operations in 1951 as a drilling and pump service company in Abernathy, TX. At that time irrigation was new to the West Texas region but rapidly gaining popularity. After several years of experience with the harsh well conditions and ever-changing water tables in West Texas, Mr. Wolf recognized the need to design, manufacture, and build a pump that was better suited for these applications. This was the start of the Wolf Pump line of submersible turbine pumps. Wolf Pump continues to transition from a regional manufacturing and pump service company to an international supplier of submersible turbine pumps with ever expanding facilities to accommodate growth into new regional and end-user markets.

In 2012, Wolf Pump was purchased by Flint & Walling, a world-wide leader in the pump industry since 1866. Under this organization and with the ability to leverage more sales, marketing, and engineering resources, several significant investments in facilities upgrades, including a state-of-the-art testing laboratory, have been made.

As Wolf grows in the future, customers should expect the same high level of service that they have grown accustomed to over the past several decades, and to be held to the following Covenant that we make with the marketplace.



Remembering our troops and our freedom





WOLF PUMP'S COVENANT TO YOU

WE WILL NEVER FORGET THAT WE SERVE PEOPLE.

Wolf understands that the people we serve are depending upon us to help ensure their own livelihoods and we know that everyone we meet is working towards achieving personal goals. When this principle guides our actions, our other promises will be easy to keep.

OUR QUALITY ALWAYS COMES FIRST.

Wolf strives to meet or exceed our customer's expectations in every situation. Wolf products are designed in a way that maximizes the durability and life span of our products, and our employees are trained to identify and eliminate defects before they reach you. Product selections made by our inside sales team are made with the overall quality of the pump system in mind. Accessories and other products that complement our pump offering will always be chosen based on the quality reputation of our suppliers.

WE WILL OFFER FRIENDLY AND RESPONSIVE CUSTOMER SERVICE.

When you call, we answer the phone. When we don't know the answer, we find it....and we do it all with a smile. Wolf employees value the relationships we develop with our customers and have a passion for providing them with the best possible customer experience.

WE ARE COMMITTED TO MINIMIZING PRODUCTION LEAD TIMES.

When we receive your order, we consider it a privilege and an opportunity to impress you. Everyone in our facility knows that we have received your order and works toward the goal of shipping it to you as quickly as possible.


WE REMEMBER THAT OUR MARKET NEEDS CHANGE OVER TIME.

Wolf Pump's employees care about what you have to say about us and about our industry. The voice of a single customer is more powerful than a thousand consultants. If you have a need that is not currently being fulfilled, we relish the opportunity to innovate.

OUR CORE VALUES WILL ALWAYS BE ANCHORED BY INTEGRITY.

We expect our team to consistently do the right thing. A financially successful business that lacks integrity is not a success.

Submersible Pumps

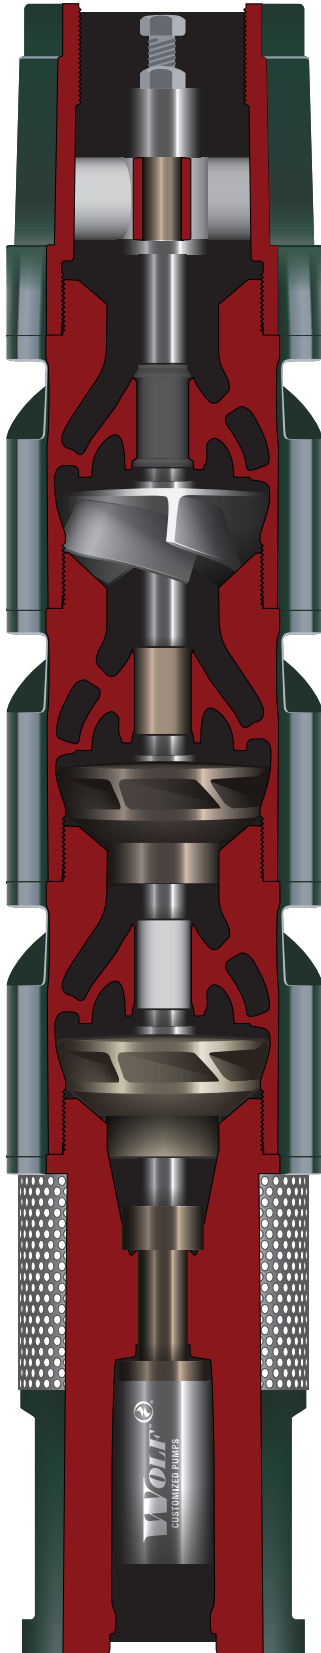

Discharge Adapter - Ductile iron or 316SS on select models

Interchangeable sizes available with top bearing and thrust bolt assembly.
 Discharge rings without bearings available on select models.

Pump Shaft - chrome plated C1045, 416 stainless steel, and ion plasma treated in stock.
 Other specialty options are also available.

Turned, ground and polished. Meets or exceeds AWWA standards.

Bushings

Discharge adapter – bronze or Vesconite

Motor bracket – bronze or Vesconite

Intermediate - bronze, Buna-N rubber, Viton, Vesconite, 2-piece silicon carbide,
 or Wolf proprietary Z bearing

Intermediate Bowl - cast iron standard, ductile iron or 316 stainless steel available on select models

Baked-on porcelain lining and custom coatings available.

Threaded bowl connections up to 8" sizes, and bolt together 10" bowls.

Impeller - bronze, 304 stainless steel, or 316 stainless steel

Anti-corrosive semi-open or enclosed design. Balanced to reduce vibration.

Collet - 416 or 316 stainless steel

Split taper provides a tight lock.

Sand Collar - bronze or 316 stainless steel

Restricts sand entry to motor bracket bushing.

Motor Bracket - Ductile iron or 316 stainless steel on select models

Fits NEMA standard motors. Custom motor adaptations available on request.

Thrust Collar - bronze UHMW

Provides up-thrust protection.

Inlet Screen - 316 stainless steel or 416 stainless steel

Limits entry of large objects into pump while allowing sufficient inflow of water.

Motor Coupling - 316 stainless steel or 416 stainless steel

Provides a non-corrosive connection between motor and pump shaft.

Cable Guard - 316 stainless steel or 416 stainless steel

Provides motor lead protection.

Motor brackets and other custom options available.

Bowl Model	Min Well ID (inches)	Capacities to (GPM)	Available Bowl and Impeller Materials		
			Cast Iron / Bronze Fitted	Cast Iron / Stainless Fitted	316SS / Stainless Fitted
4HO	5	125		X	
4MO	5	105		X	
5LL5V	6	175		X	
5LL8V	6	200		X	
5ML6V	6-Steel / 7-PVC	120	X	Coming Soon	
5MH6V	6-Steel / 7-PVC	250	X	X	
5MH7V	6-Steel / 7-PVC	250	X	X	
5MM6V	6-Steel / 7-PVC	195	X	X	
5MM8V	6-Steel / 7-PVC	195	X		
5HH7V	6	350		X	
5HX7V	6	550	X		
6LL6V	7	120	X		
6LM6V	7	195	X	X	X
6LM8V	7	220	X		
6LH6V	7	290	X	X	X
6LH7V	7	320	X	X	X
6LO	7	270	X	X	X
6MM8V	7	365	X	X	
6MO	7	390	X	X	
6HH7V	7	450	X	X	
7MH5V	8	640		X	
7MH7V	8	850		X	
7CE5V	8	425	X	NEW	
7CE8V	8	575	X	NEW	
8LL4V	9	500	X	Coming Soon	
8LL8V	9	575	X	X	
8LM8V	9	625	X	Coming Soon	
8MM5V	9	800	X	X	
8MM7V	9	1000	X	X	
9CE5V	10	1000	X	NEW	
9CO5V	10	1000	X		
9CE8V	10	1000	X	NEW	
9CO8V	10	1000	X		
10LL5V	11	750		X	X
10LL8V	11	950		X	X
10MM6V	11	1250		X	X
10MM8V	11	1600		X	X



4" - 10" Submersible Turbine RFQ Form

P.O. Box 490 / 18014 N I-27 Office: (806) 298-2514
Abernathy, TX 79311-0490 E-mail: sales@wolfpumps.com

Company Name: _____

Contact Name: _____

Date: _____

Phone: _____

☐ New System

E-Mail: _____

☐ Existing System

SUBMERSIBLE TURBINE DETAILS

Industry Sector: ☐ Residential ☐ Ag Irrigation ☐ Water Utility ☐ Mining ☐ Other

Application: ☐ Water Well ☐ Seawater Lift ☐ Dewatering ☐ Other

If "other" to either, please explain: _____


Well Diameter: _____

Special Notes:

Pumping Water Level: _____

Column Pipe Diameter: _____

Setting: _____
(total column pipe length)

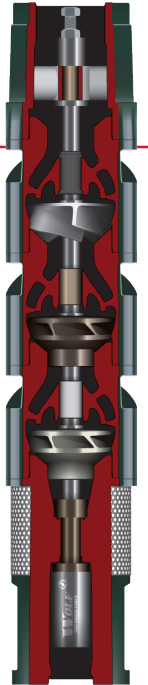

Please check items you would like quoted:

☐ Pump End ☐ Motor ☐ Column Pipe ☐ Check Valve ☐ Cable ☐ Well Head ☐ Control Panel

PERFORMANCE DATA

Head Calculation:

Lift (Pumping Water Level) _____

Column friction losses _____

Check valve friction losses _____

Discharge head(ft) + _____

TDH (feet): _____

Special Notes:

Required Capacity (USGPM): _____

OR

Maximize Existing HP Rating: _____

Motor: HP _____ Phase _____ Voltage _____ RPM _____

Materials: ☐ Standard ☐ Other

Controls: ☐ Constant Speed ☐ Variable Speed

TOP OF THE LINE TESTING FACILITY




Quality Equipment. Quality People. Quality Results.

- Max Working Pressure 1500 psi
- Max Flow Rate 8000 GPM
- Max Horsepower 500 HP on VFD
- Max Voltage 6600
- Max Amps 1200
- 2 Axis Vibration Readings
- 65,000 Gallons of Reserve Water
- 2 - 60 in. Casings, 85 ft. deep
- 66 ft. tall Tower with 4 Ton Electric Crane
- Calibrated Electronic Flow Meters
- Air Operated Valves
- Yokagawa Motor Analyzer
- Custom Computer Program for Data
- Collection and Performance Curve Generation
- Remote View for Offsite Witness Testing


4" Pump Curve

pages 10-11


THE WOLF ADVANTAGE



Concealed, water-tight threads —
Assemble with ease and prohibit water penetration



Robust casting —
Up to 23% heavier wall thickness than competitors



Smooth, high-flow bowl —
Up to 12% larger internal diameter than bolt-together bowls



HIGH EFFICIENCY BOWL DESIGN —
PROVIDES MORE FLOW WITH LESS HORSEPOWER


- Designed for quick assembly and field repairability.
- Extends the life of your pump even in the harshest well conditions.
- 4, 5, 6, 7 & 8 in. sizes available.
- Available in cast iron, glass-lined or ductile iron.

THAT'S THE RIGHT SOLUTION, RIGHT WHEN YOU NEED IT.

To find the right pump for your application,
see our Sizing Tool at WolfPumps.com,
call (800) 886-2606, or email sales@wolfpumps.com

WOLF 
CUSTOMIZED PUMPS
Right Pump. Right Now.®

Wolf Pumps • PO Box 490, 18014 N. I-27 Hwy • Abernathy, TX 79311 • WolfPumps.com

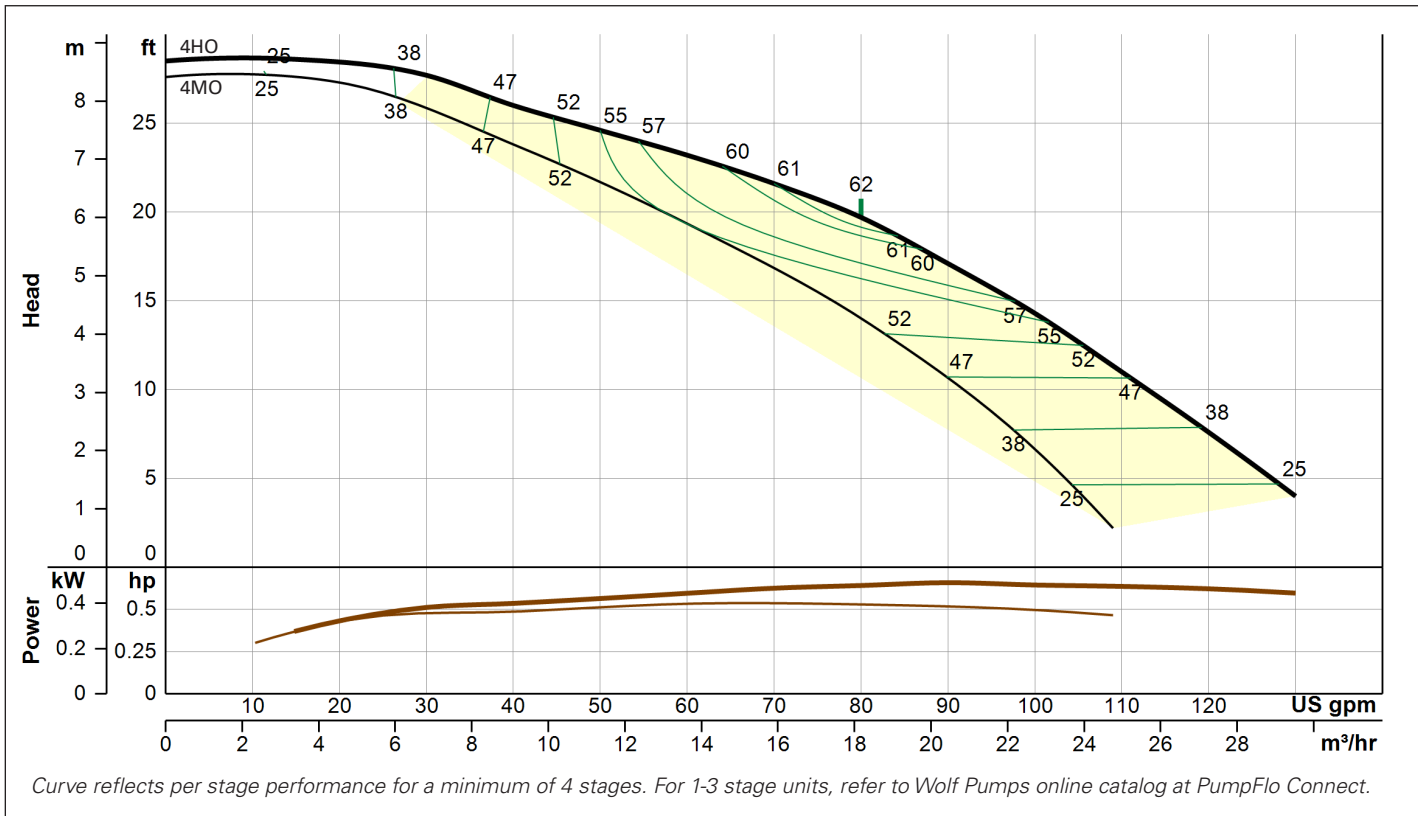


Mechanical Data

Bowl Shaft Diameter (in) 0.875
Disch Sizes Available (in) 2" F
Motor Sizes Available (in) 4, 6
K factor 1.51
Runout NPSHr (ft) 13

Max Sphere Size (in) 0.08
Impeller Eye Area (square inches) 2.62
Impeller Type open
Bowl Pressure Limits (psig) 345

1 stg weight (lbs) 19.5
Add stage weight (lbs) 6.3
Impeller weight (lbs) 1
Bowl Diameter (in) 3.875
Max Diameter w/ Cable Guard (in) 4.3125
1 stg length (in) 12.5
Add stage length (in) 3

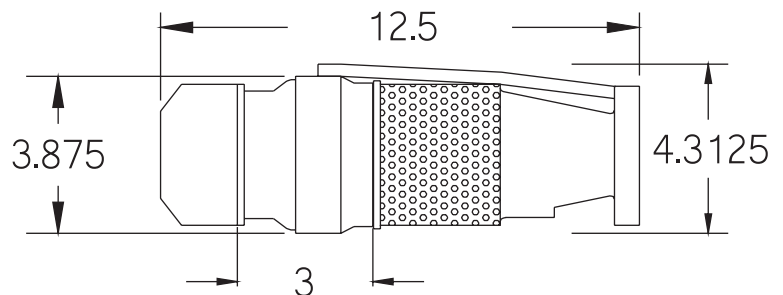

5" Pump Curve

pages 12-21

**SMALL,
BUT MIGHTY.**




WOLF 5HX SERIES SUBMERSIBLES

DESIGNED TO FIT IN 6" CASING (PVC OR STEEL)

- Delivers 600 GPM — A small bodied pump with big power
- Multiple bearing and shaft options
- Threaded bowl design for quick assembly
- In stock, and readily available



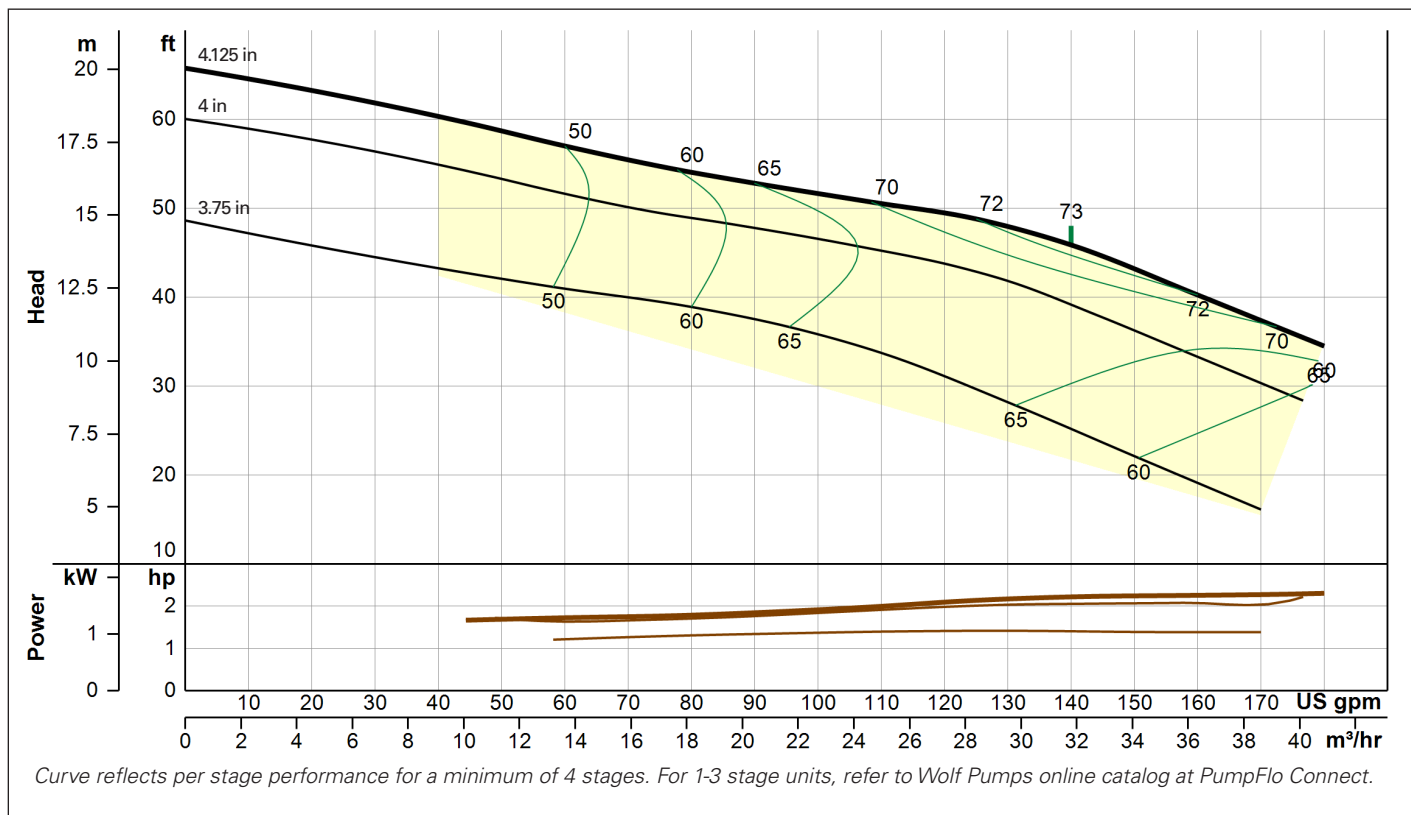

Tabled Performance Data


	4.125"		4.0"		3.75"	
GPM	TDH/STG	HP/STG	TDH/STG	HP/STG	TDH/STG	HP/STG
110	50.5	2.1	45.3	1.9	33.8	1.4
130	47.8	2.2	41.8	2.1	28.3	1.5
140	46.0	2.3	39.0	2.1	25.3	1.5
160	40.3	2.3	33.3	2.2	19.1	1.4


Mechanical Data

Bowl Shaft Diameter (in) 0.875
Disch Sizes Available (in) 3" F - 4"M
Motor Sizes Available (in) 4, 6
K factor 2.3
Runout NPSHr (ft) 8

Max Sphere Size (in) 0.375
Impeller Eye Area (square inches) 3.52
Impeller Type enclosed
Bowl Pressure Limits (psig) 533

1 stg weight (lbs) 50
Add stage weight (lbs) 14
Impeller weight (lbs) 1.7
Bowl Diameter (in) 5.25
Max Diameter w/ Cable Guard (in) 5.625
1 stg length (in) 18
Add stage length (in) 4.625

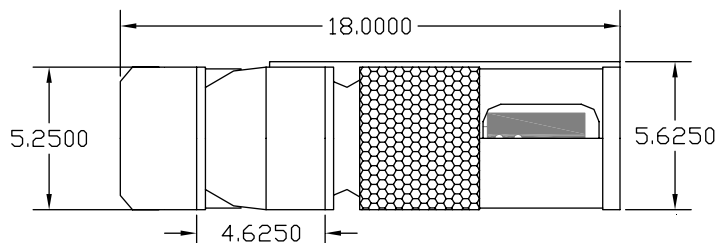

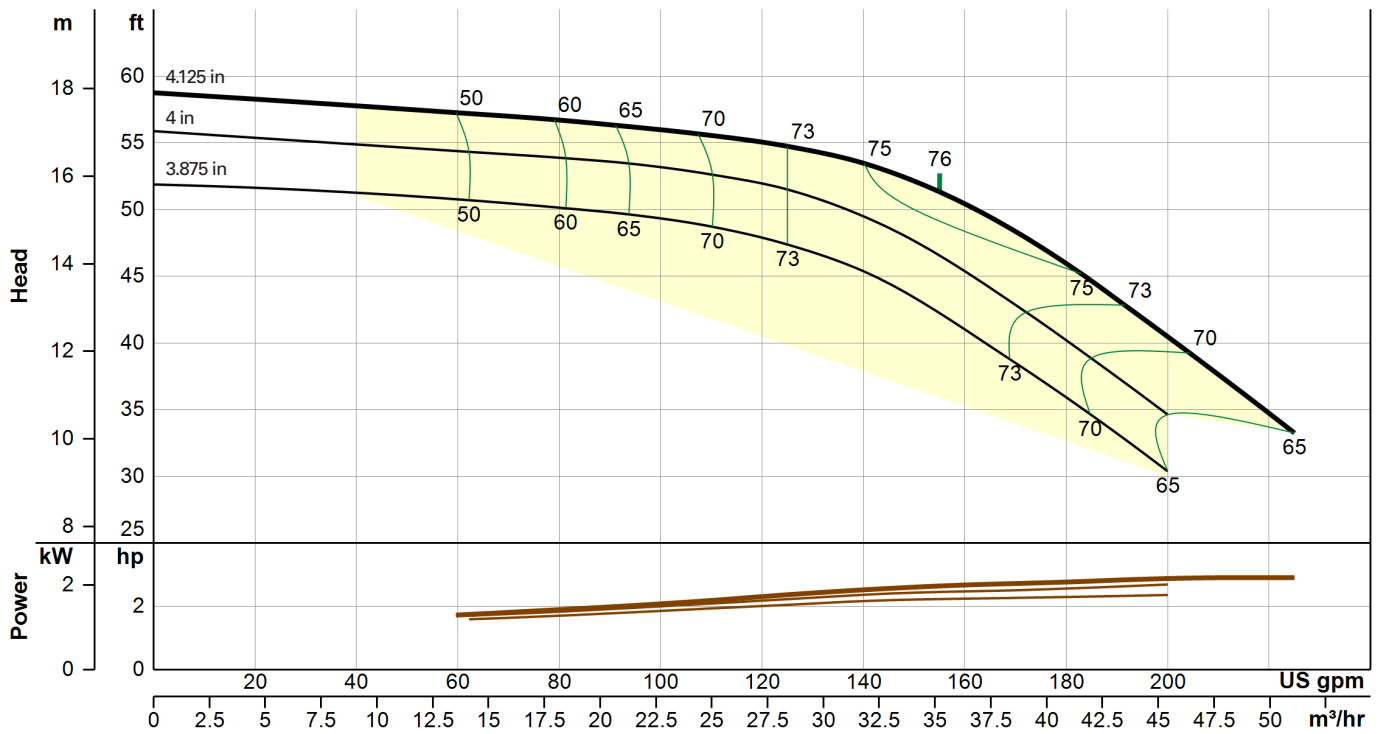

Tabled Performance Data


	4.125"		4.0"		3.875"	
GPM	TDH/STG	HP/STG	TDH/STG	HP/STG	TDH/STG	HP/STG
140	53.5	2.6	49.2	2.4	45.5	2.2
145	52.8	2.6	48.8	2.5	44.2	2.2
155	51.3	2.7	46.3	2.5	42.0	2.3
170	48.0	2.8	42.8	2.6	39.0	2.3


Mechanical Data

Bowl Shaft Diameter (in) 0.875
Disch Sizes Available (in) 3" F - 4" M
Motor Sizes Available (in) 4, 6
K factor 2.4
Runout NPSHr (ft) 12

Max Sphere Size (in) 0.375
Impeller Eye Area (square inches) 2.81
Impeller Type enclosed
Bowl Pressure Limits (psig) 533

1 stg weight (lbs) 50
Add stage weight (lbs) 14
Impeller weight (lbs) 1.75
Bowl Diameter (in) 5.25
Max Diameter w/ Cable Guard (in) 5.625
1 stg length (in) 18
Add stage length (in) 4.625

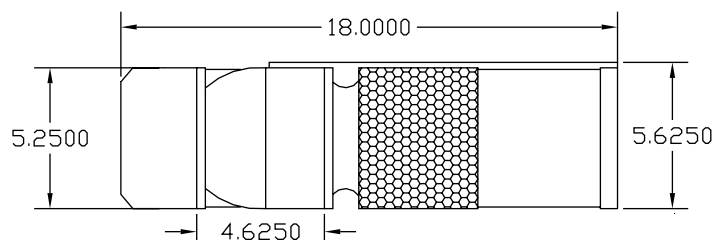

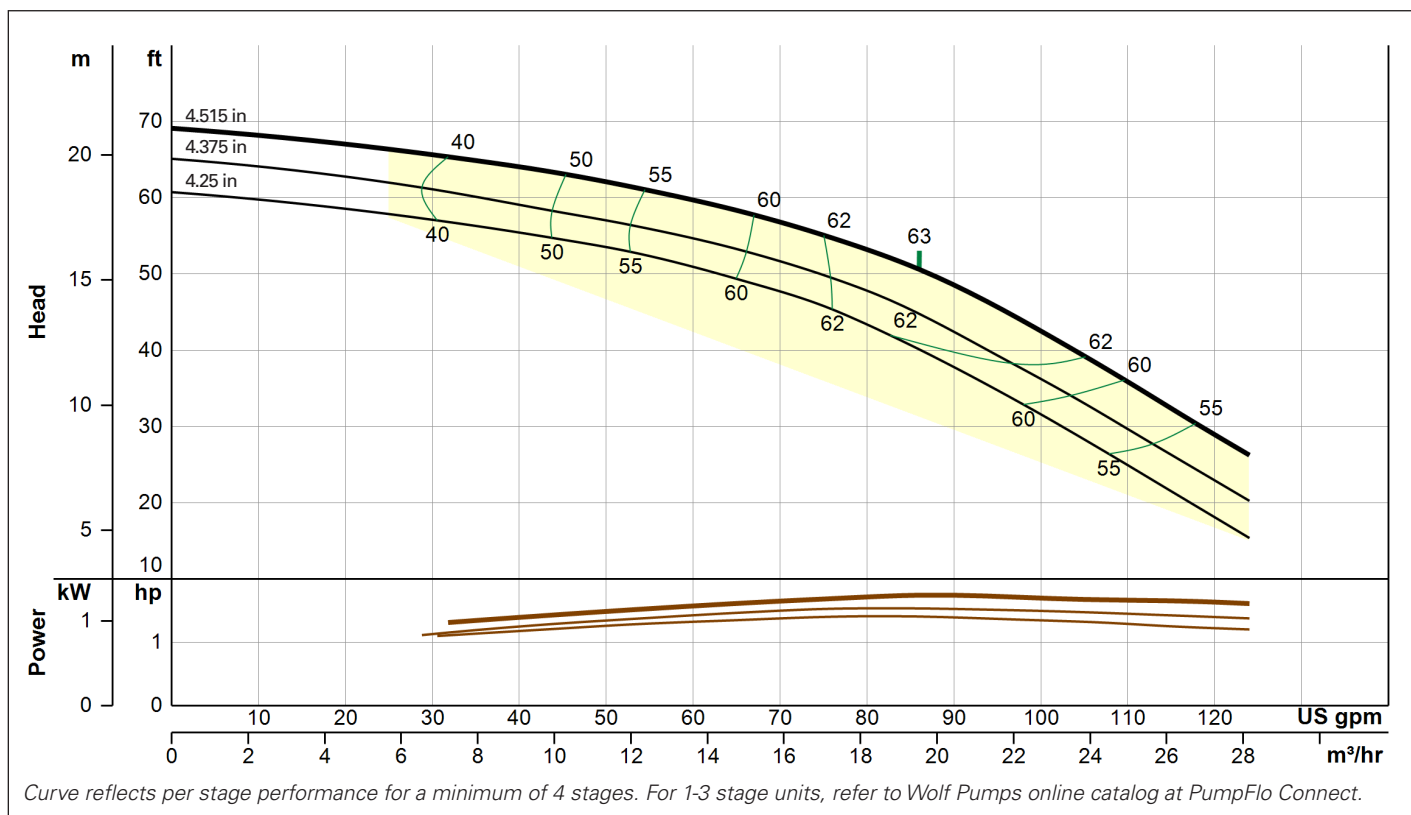


Tabled Performance Data

	4.515"		4.375"		4.25"	
GPM	TDH/STG	HP/STG	TDH/STG	HP/STG	TDH/STG	HP/STG
60	59.6	1.72	54.5	1.56	50.8	1.45
75	55.1	1.83	49.8	1.66	45.7	1.52
87	50.0	1.89	43.9	1.66	39.4	1.52
100	42.2	1.84	36.2	1.63	31.6	1.47


Mechanical Data

Bowl Shaft Diameter (in) 1
 Disch Sizes Available (in) 3" F - 4" Mx
 Motor Sizes Available (in) 4, 6x
 K factor 2.3
 Runout NPSHr (ft) 20
 1 stg weight (lbs) 49
 Add stage weight (lbs) 16
 Impeller weight (lbs) 2.2
 Bowl Diameter (in) 5.5
 Max Diameter w/ Cable Guard (in) 5.75
 1 stg length (in) 17.15
 Add stage length (in) 4.875

Max Sphere Size (in) 0.24
 Impeller Eye Area (square inches) 4.34
 Impeller Type enclosed
 Bowl Pressure Limits (psig) 560

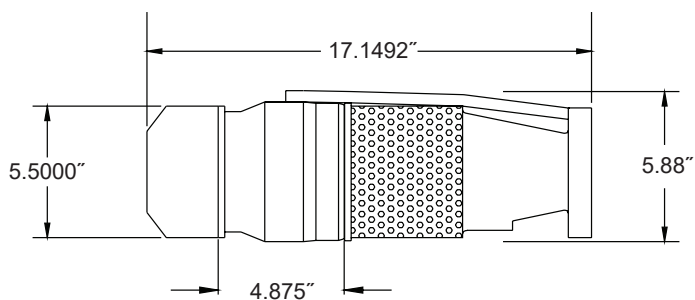

5" Pump Curves

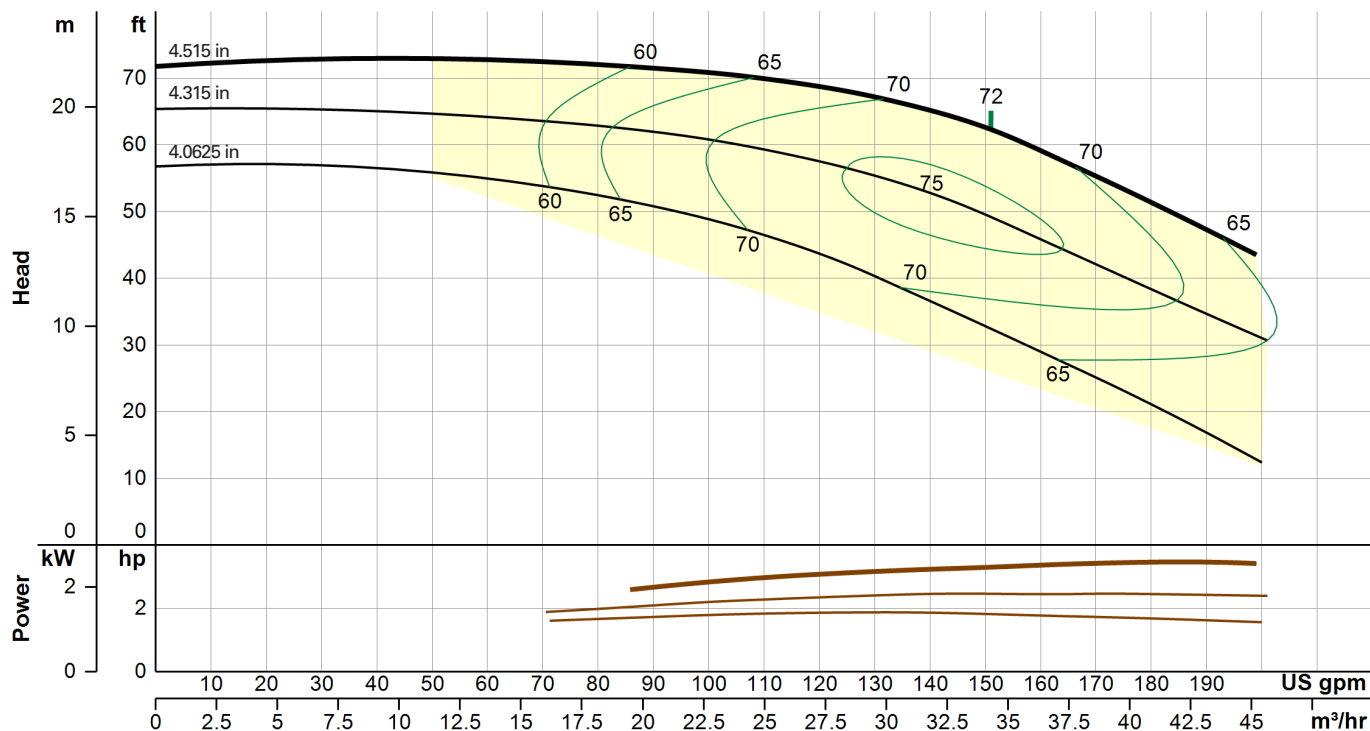

Curve reflects per stage performance for a minimum of 4 stages. For 1-3 stage units, refer to Wolf Pumps online catalog at PumpFlo Connect.

Tabled Performance Data


	4.515"		4.315"		4.0625"	
GPM	TDH/STG	HP/STG	TDH/STG	HP/STG	TDH/STG	HP/STG
125	67.8	3.2	57.0	2.4	42.0	1.9
140	65.0	3.3	53.0	2.5	37.0	1.9
150	63.0	3.4	49.3	2.5	33.0	1.9
180	51.3	3.5	38.3	2.5	21.0	1.7


Mechanical Data

Bowl Shaft Diameter (in) 0.875
Disch Sizes Available (in) 3" F - 4" M
Motor Sizes Available (in) 4, 6
K factor 2.3
Runout NPSHr (ft) 12

Max Sphere Size (in) 0.41
Impeller Eye Area (square inches) 3.93
Impeller Type enclosed
Bowl Pressure Limits (psig) 560

1 stg weight (lbs) 49
Add stage weight (lbs) 16
Impeller weight (lbs) 2.2
Bowl Diameter (in) 5.5
Max Diameter w/ Cable Guard (in) 5.75
1 stg length (in) 17.15
Add stage length (in) 4.875

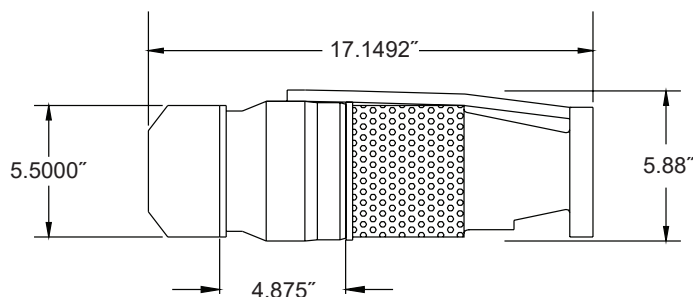

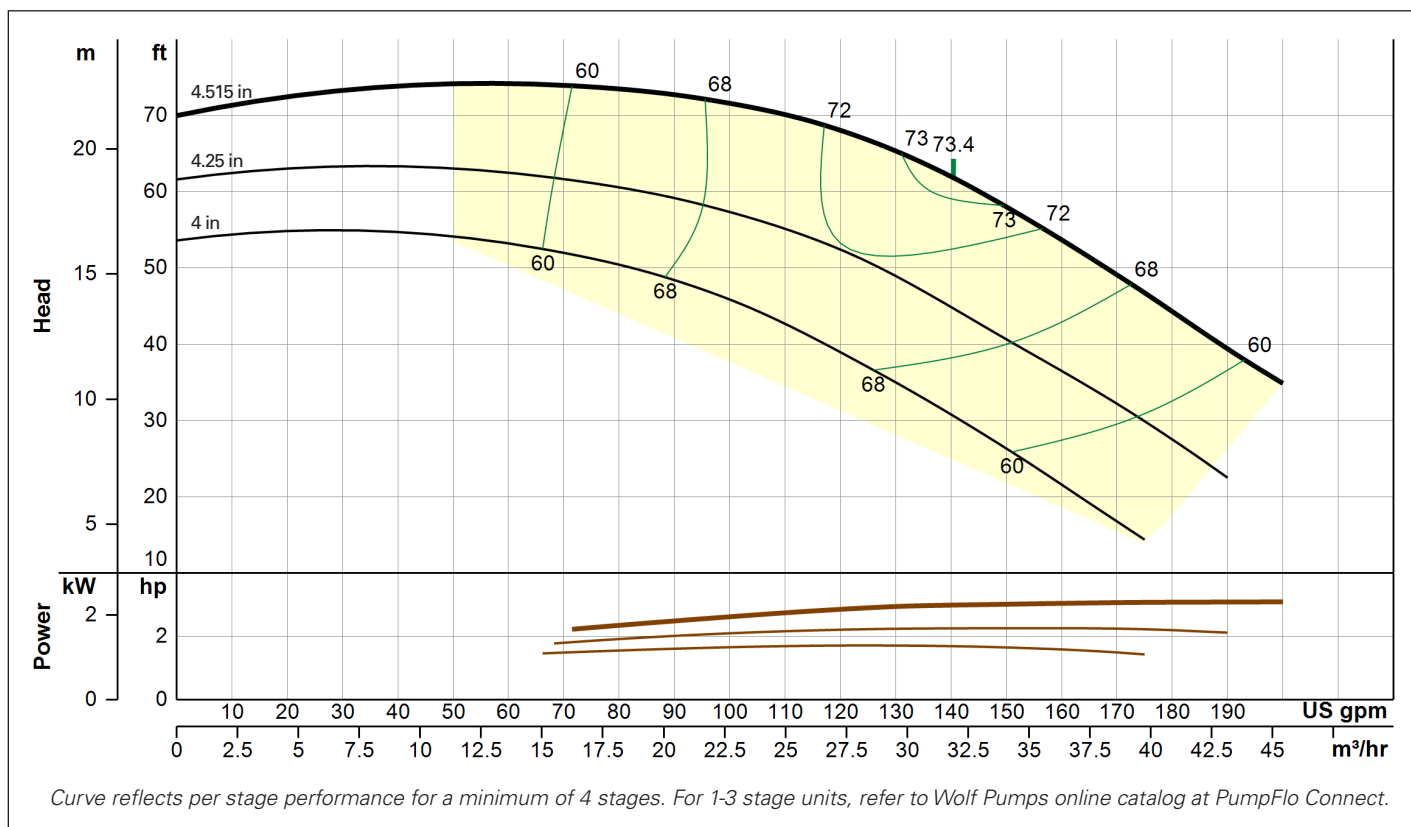

Tabled Performance Data


	4.515"		4.25"		4.0"	
GPM	TDH/STG	HP/STG	TDH/STG	HP/STG	TDH/STG	HP/STG
100	72.0	2.7	57.2	2.2	45.8	1.7
120	68.0	2.9	52.3	2.3	38.8	1.8
140	62.0	3.1	44.5	2.3	30.5	1.7
160	54.0	3.1	36.5	2.3	21.6	1.6

Mechanical Data


Bowl Shaft Diameter (in) 0.875
Disch Sizes Available (in) 3" F - 4"M
Motor Sizes Available (in) 4, 6
K factor 2.3
Runout NPSHr (ft) 14

1 stg weight (lbs) 49
Add stage weight (lbs) 16
Impeller weight (lbs) 2.5
Bowl Diameter (in) 5.5
Max Diameter w/ Cable Guard (in) 5.75
1 stg length (in) 17.15
Add stage length (in) 4.875

Max Sphere Size (in) 0.41
Impeller Eye Area (square inches) 3.93
Impeller Type enclosed
Bowl Pressure Limits (psig) 560

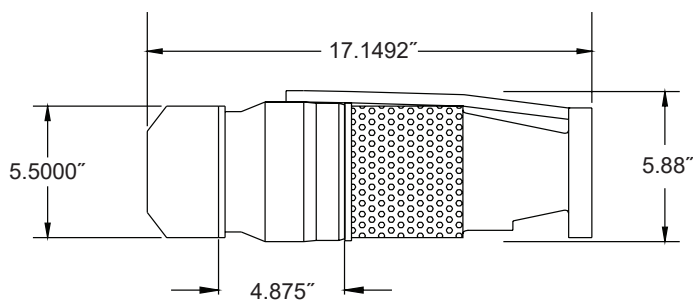

5" Pump Curves

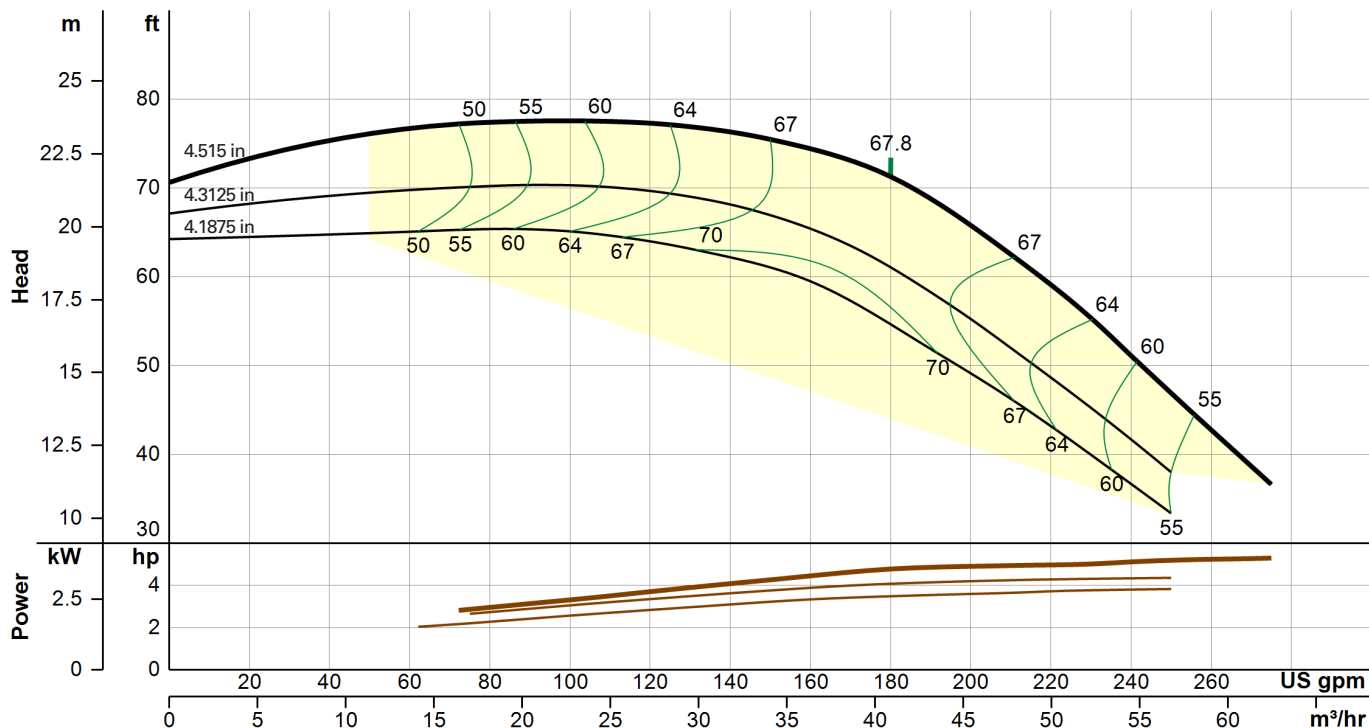

Curve reflects per stage performance for a minimum of 4 stages. For 1-3 stage units, refer to Wolf Pumps online catalog at PumpFlo Connect.

Tabled Performance Data


	4.515"		4.3125"		4.1875"	
GPM	TDH/STG	HP/STG	TDH/STG	HP/STG	TDH/STG	HP/STG
160	74.0	4.6	65.2	4.0	59.5	3.4
170	72.8	4.8	63.5	4.1	57.0	3.5
180	71.3	4.9	60.8	4.2	54.5	3.6
200	65.5	5.1	55.3	4.3	49.0	3.7


Mechanical Data

Bowl Shaft Diameter (in) 0.875
Disch Sizes Available (in) 3" F - 4"M
Motor Sizes Available (in) 6
K factor 2.3
Runout NPSHr (ft) 14

1 stg weight (lbs) 49
Add stage weight (lbs) 16
Impeller weight (lbs) 2
Bowl Diameter (in) 5.5
Max Diameter w/ Cable Guard (in) 5.75
1 stg length (in) 17.15
Add stage length (in) 4.875

Max Sphere Size (in) 0.55
Impeller Eye Area (square inches) 3.87
Impeller Type enclosed
Bowl Pressure Limits (psig) 560

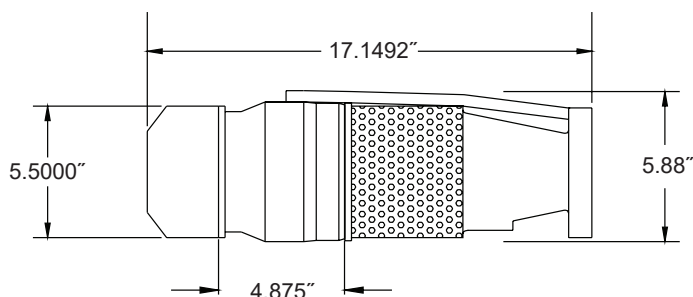

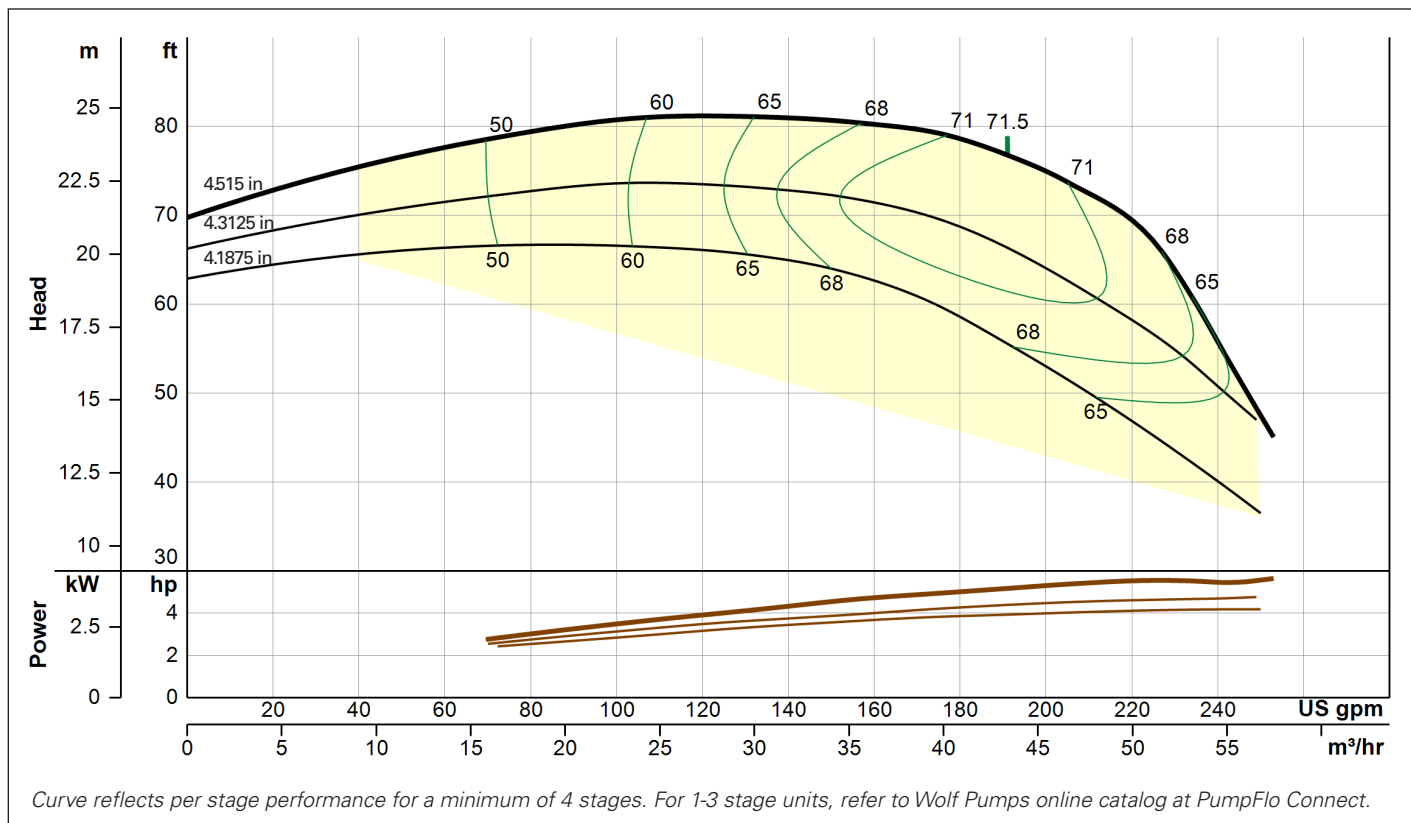

Tabled Performance Data


	4.515"		4.3125"		4.1875"	
GPM	TDH/STG	HP/STG	TDH/STG	HP/STG	TDH/STG	HP/STG
170	79.5	5.0	70.0	4.3	60.8	3.9
180	78.5	5.2	68.5	4.4	58.5	4.0
190	77.0	5.3	66.0	4.5	55.8	4.1
200	74.8	5.5	63.5	4.6	53.0	4.1

Mechanical Data


Bowl Shaft Diameter (in) 0.875
Disch Sizes Available (in) 3" F - 4"M
Motor Sizes Available (in) 6
K factor 2.3
Runout NPSHr (ft) 14

Max Sphere Size (in) 0.55
Impeller Eye Area (square inches) 3.87
Impeller Type enclosed
Bowl Pressure Limits (psig) 560

1 stg weight (lbs) 49
Add stage weight (lbs) 16
Impeller weight (lbs) 2.3
Bowl Diameter (in) 5.5
Max Diameter w/ Cable Guard (in) 5.75
1 stg length (in) 17.15
Add stage length (in) 4.875

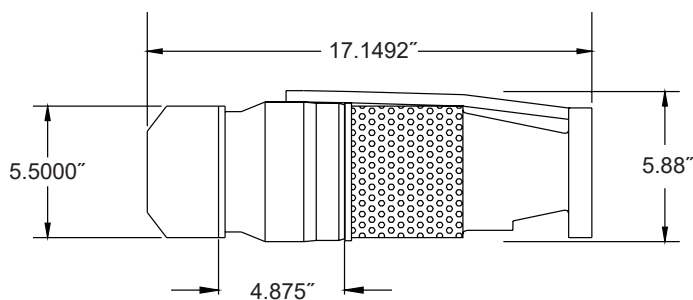

5" Pump Curves

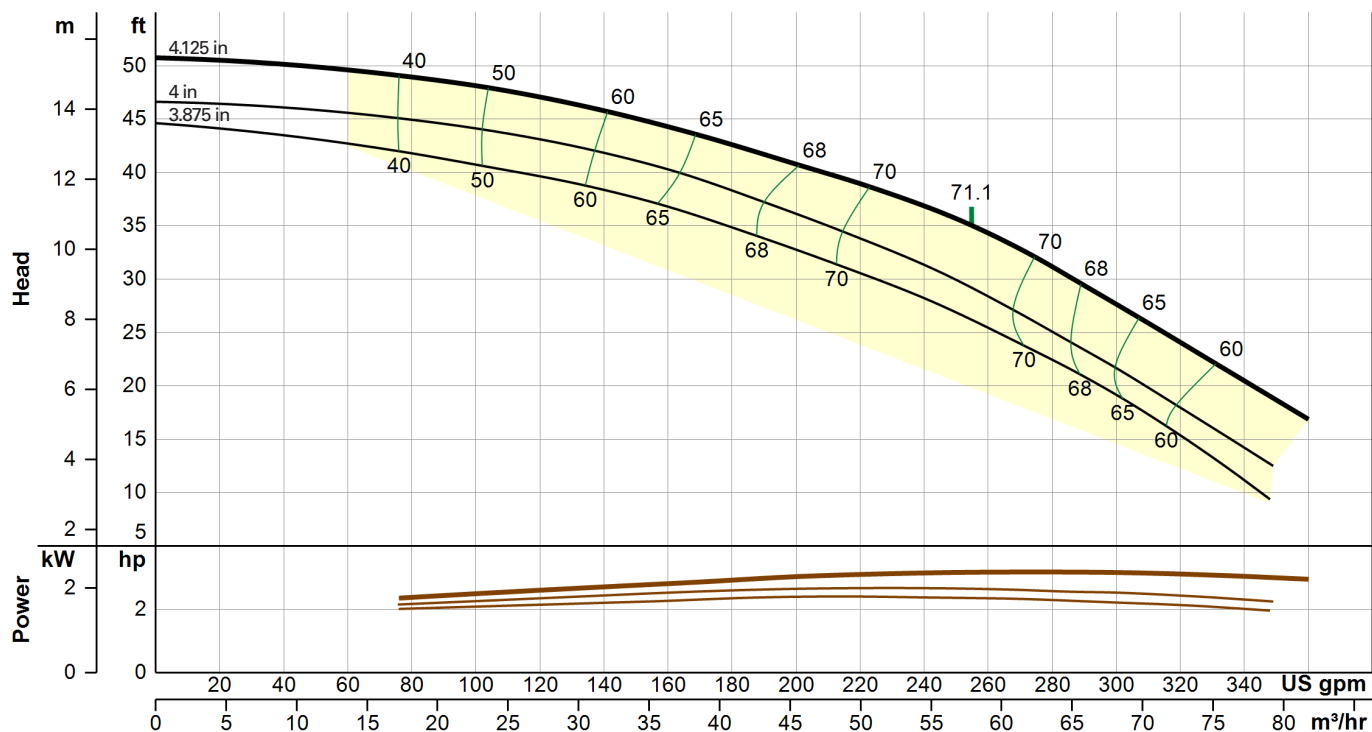

Curve reflects per stage performance for a minimum of 4 stages. For 1-3 stage units, refer to Wolf Pumps online catalog at PumpFlo Connect.

Tabled Performance Data


	4.125"		4.0"		3.875"	
GPM	TDH/STG	HP/STG	TDH/STG	HP/STG	TDH/STG	HP/STG
240	36.8	3.2	31.3	2.8	28.3	2.4
245	36.3	3.3	30.8	2.8	27.5	2.4
255	35.0	3.3	29.0	2.7	26.0	2.4
275	32.0	3.3	26.0	2.7	23.2	2.4


Mechanical Data

Bowl Shaft Diameter (in) 0.875
Disch Sizes Available (in) 3" F - 4" M
Motor Sizes Available (in) 4, 6
K factor 2.5
Runout NPSHr (ft) 28

Max Sphere Size (in) 0.5
Impeller Eye Area (square inches) 7.16
Impeller Type enclosed
Bowl Pressure Limits (psig) 533

1 stg weight (lbs) 50
Add stage weight (lbs) 14
Impeller weight (lbs) 1.95
Bowl Diameter (in) 5.25
Max Diameter w/ Cable Guard (in) 5.625
1 stg length (in) 18.25
Add stage length (in) 4.875

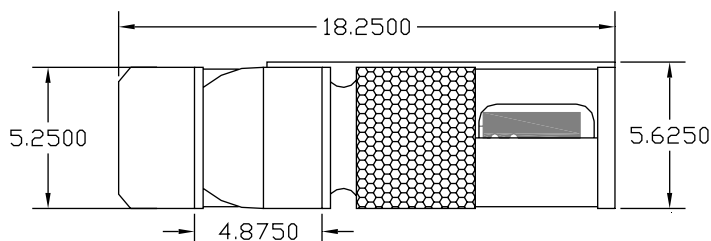

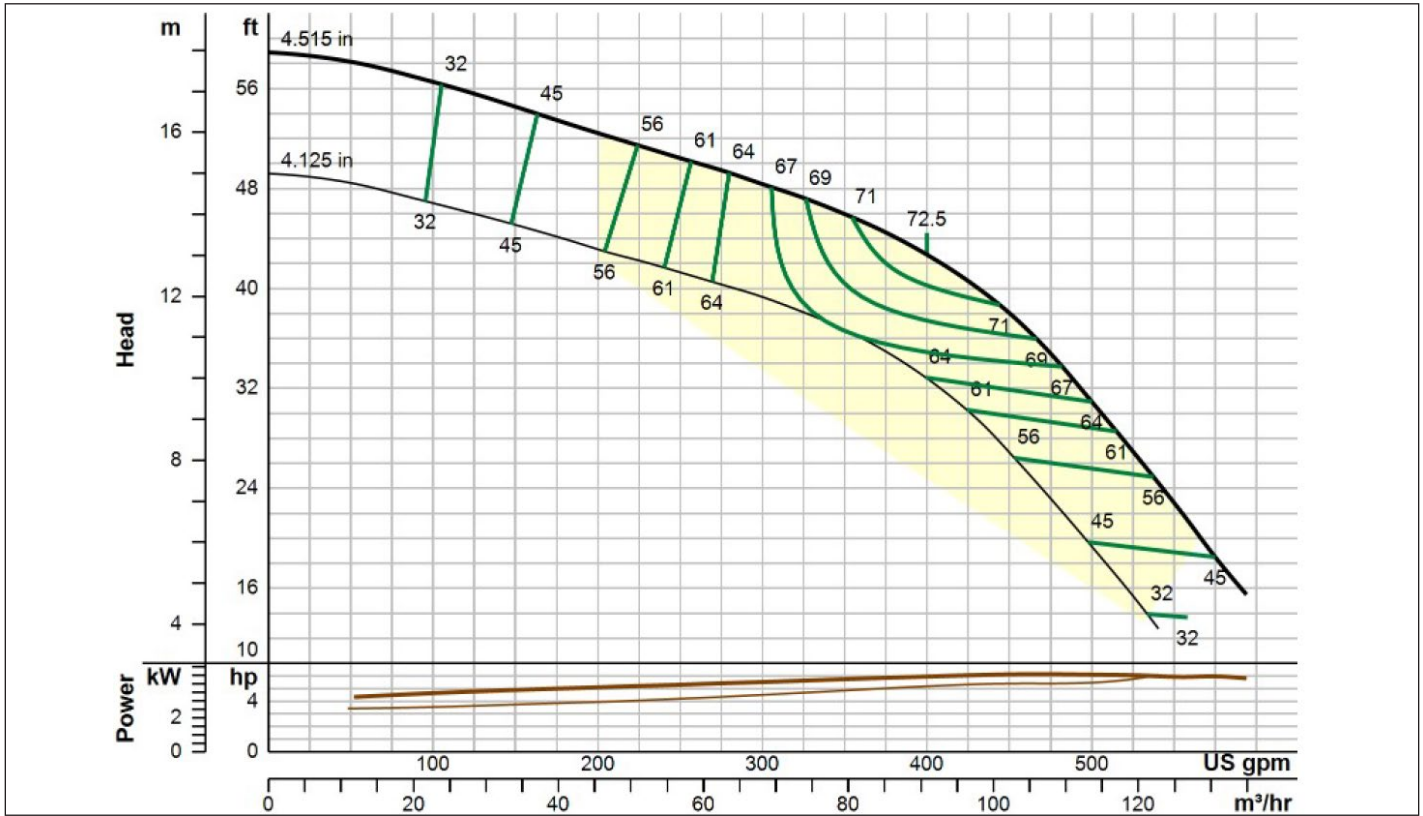

Curve reflects per stage performance for a minimum of 4 stages. For 1-3 stage units, refer to Wolf Pumps online catalog at PumpFlo Connect.

Tabled Performance Data


	4.515"		4.3125"		4.125"	
GPM	TDH/STG	HP/STG	TDH/STG	HP/STG	TDH/STG	HP/STG
330	46.5	5.8	38.8	4.8	31.5	3.9
350	45.7	5.9	37.8	4.8	30.5	4.1
375	44.5	6.0	35.8	5.0	28.8	4.2
425	40.0	6.3	31.0	5.2	23.8	4.3

Mechanical Data

Bowl Shaft Diameter (in) 1
Disch Sizes Available (in) 3" F - 4" M
Motor Sizes Available (in) 6
K factor
Runout NPSHr (ft) 30

Max Sphere Size (in) 0.425
Impeller Eye Area (square inches) 6.85
Impeller Type enclosed
Bowl Pressure Limits (psig) 560

1 stg weight (lbs) 52
Add stage weight (lbs) 20
Impeller weight (lbs) 3
Bowl Diameter (in) 5.2
Max Diameter w/ Cable Guard (in) 5.63
1 stg length (in) 19.1
Add stage length (in) 6.75

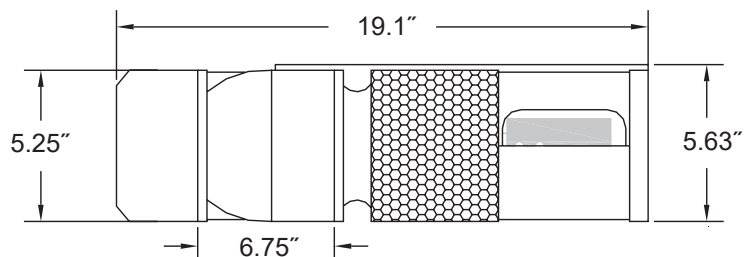

6" Pump Curve

pages 22-31

6-INCH SUBMERSIBLE TURBINE STAINLESS STEEL

WP0027 0222
Supersedes 1119

6L SERIES

Each pump is personally built by our expert craftsmen and then passed through our world-class testing facility to ensure your exact specifications are met.

- Produces up to 320 GPM
- Open or closed stainless steel impeller
- Durable in high-corrosive and harsh pumping environments
- Perfect for municipal, off-shore, chemical and mining applications


In most cases, Wolf can take an order and ship within 48 hours, truly delivering on our promise: Right Pump. Right Now.



See our Pump Selector at:

www.wolfpumps.com

WOLF 
CUSTOMIZED PUMPS
Right Pump. Right Now.®

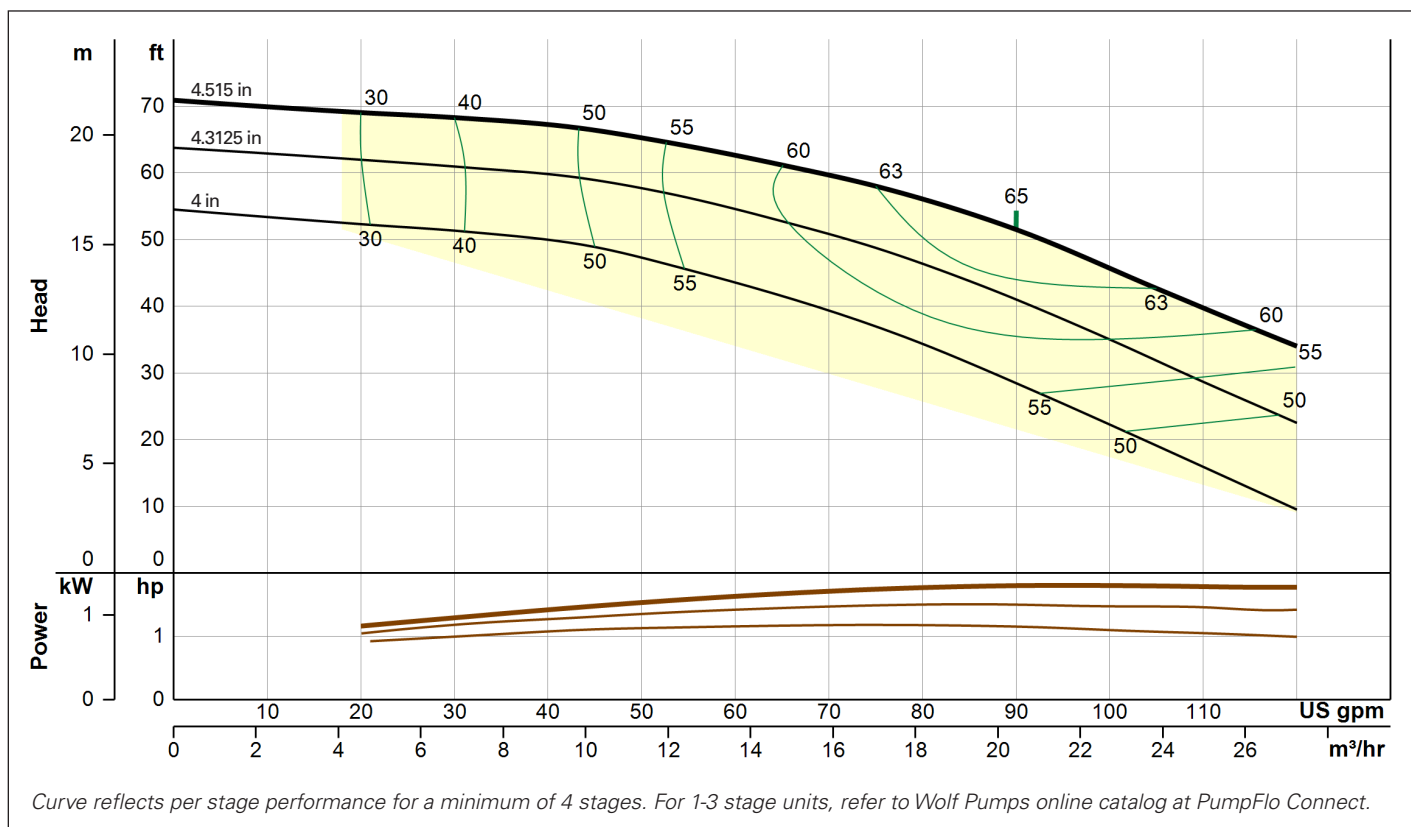


Tabled Performance Data

	4.515"		4.3125"		4.0"	
GPM	TDH/STG	HP/STG	TDH/STG	HP/STG	TDH/STG	HP/STG
78	56.8	1.8	47.3	1.5	35.5	1.2
85	53.8	1.8	43.8	1.6	31.3	1.2
90	51.5	1.9	40.8	1.5	28.5	1.2
100	45.5	1.9	35.0	1.5	22.3	1.1


Mechanical Data

Bowl Shaft Diameter (in)	1
Disch Sizes Available (in)	3" F - 4" M
Motor Sizes Available (in)	6, 8
K factor	2.3
Runout NPSHr (ft)	10
1 stg weight (lbs)	49
Add stage weight (lbs)	16
Impeller weight (lbs)	2.2
Bowl Diameter (in)	5.84
Max Diameter w/ Cable Guard (in)	6.5
1 stg length (in)	17.15
Add stage length (in)	4.875

Max Sphere Size (in)	0.24
Impeller Eye Area (square inches)	4.34
Impeller Type	enclosed
Bowl Pressure Limits (psig)	560

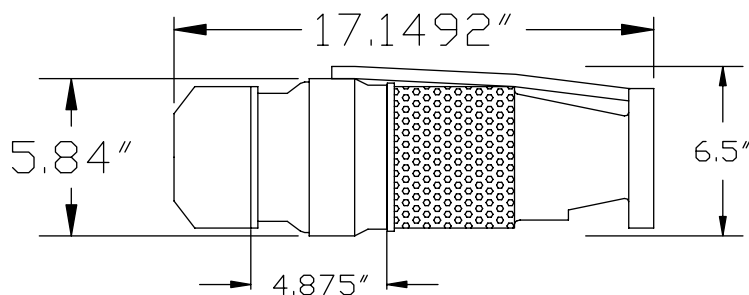

6" Pump Curves

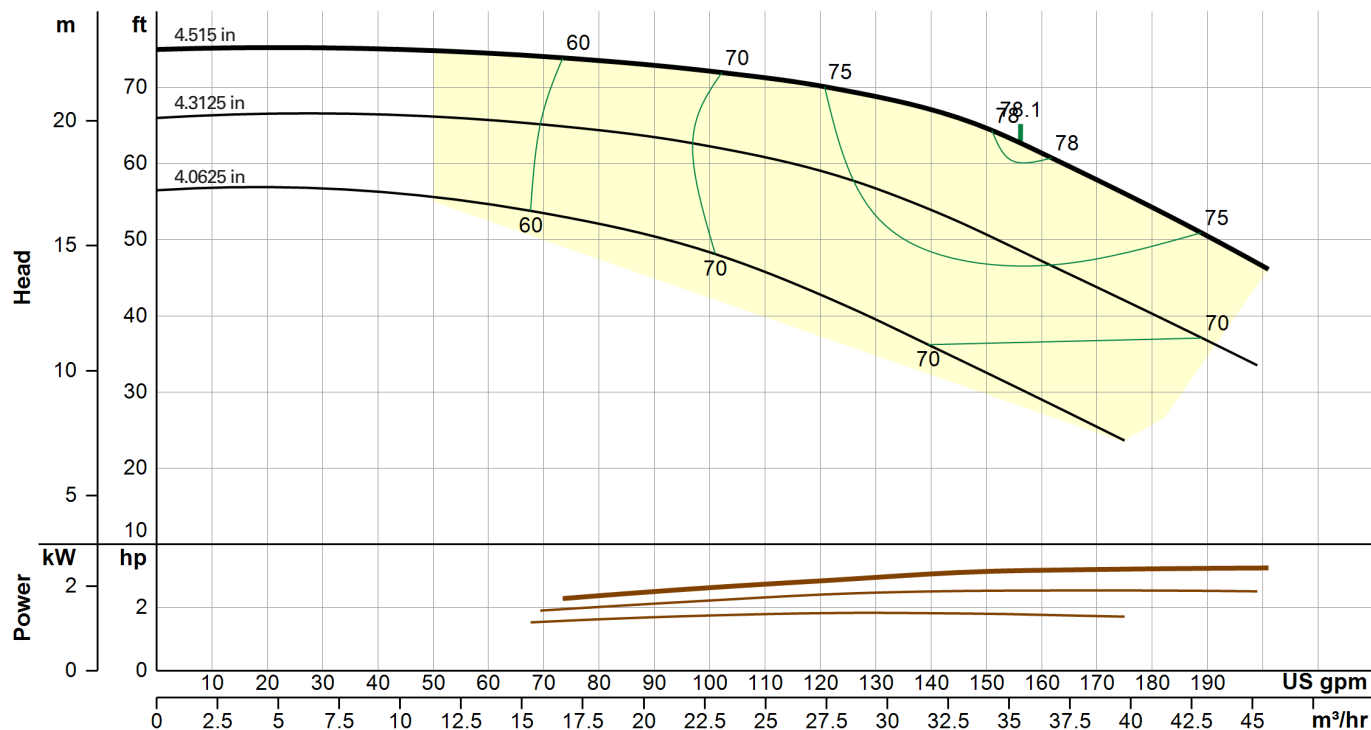

Curve reflects per stage performance for a minimum of 4 stages. For 1-3 stage units, refer to Wolf Pumps online catalog at PumpFlo Connect.


Tabled Performance Data


	4.515"		4.3125"		4.0625"	
GPM	TDH/STG	HP/STG	TDH/STG	HP/STG	TDH/STG	HP/STG
125	69.3	3.0	58.0	2.5	41.3	1.9
140	66.5	3.1	54.0	2.6	36.0	1.9
155	63.0	3.2	49.0	2.6	30.8	1.8
165	59.5	3.3	45.5	2.6	27.3	1.8

Mechanical Data

Bowl Shaft Diameter (in)	1
Disch Sizes Available (in)	3" F - 4"M
Motor Sizes Available (in)	6, 8
K factor	2.3
Runout NPSHr (ft)	20
1 stg weight (lbs)	49
Add stage weight (lbs)	16
Impeller weight (lbs)	2.2
Bowl Diameter (in)	5.84
Max Diameter w/ Cable Guard (in)	6.5
1 stg length (in)	17.15
Add stage length (in)	4.875

Max Sphere Size (in)	0.41
Impeller Eye Area (square inches)	3.92
Impeller Type	enclosed
Bowl Pressure Limits (psig)	560

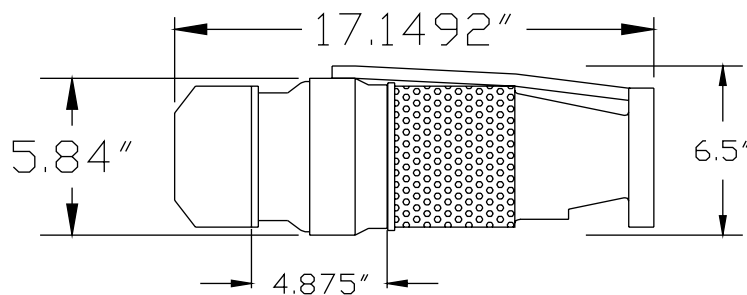

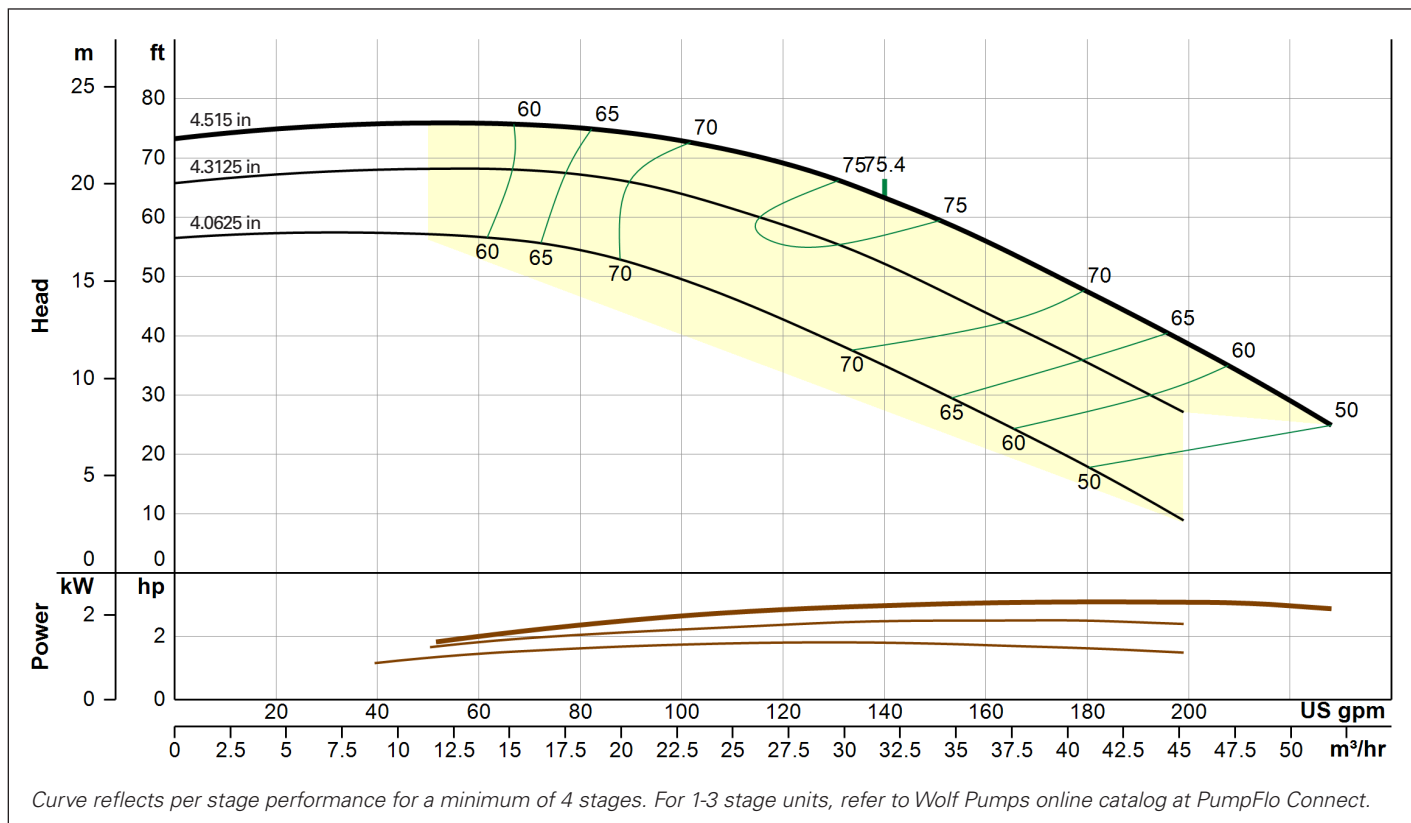


Tabled Performance Data

	4.515"		4.3125"		4.0625"	
GPM	TDH/STG	HP/STG	TDH/STG	HP/STG	TDH/STG	HP/STG
100	72.8	2.7	63.5	2.3	49.5	1.8
125	67.5	3.0	57.3	2.5	40.8	1.8
140	63.3	3.1	51.8	2.5	35.0	1.8
160	55.8	3.1	43.8	2.6	26.8	1.8


Mechanical Data

Bowl Shaft Diameter (in)	1
Disch Sizes Available (in)	3" F - 4"M
Motor Sizes Available (in)	6, 8
K factor	2.3
Runout NPSHr (ft)	30
1 stg weight (lbs)	49
Add stage weight (lbs)	16
Impeller weight (lbs)	2.5
Bowl Diameter (in)	5.84
Max Diameter w/ Cable Guard (in)	6.5
1 stg length (in)	17.15
Add stage length (in)	4.875

Max Sphere Size (in)	0.41
Impeller Eye Area (square inches)	3.92
Impeller Type	enclosed
Bowl Pressure Limits (psig)	560

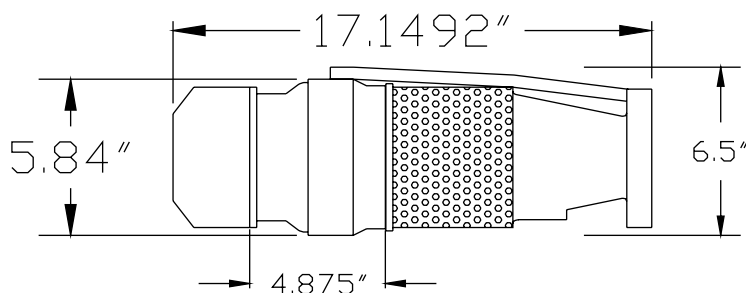

6" Pump Curves

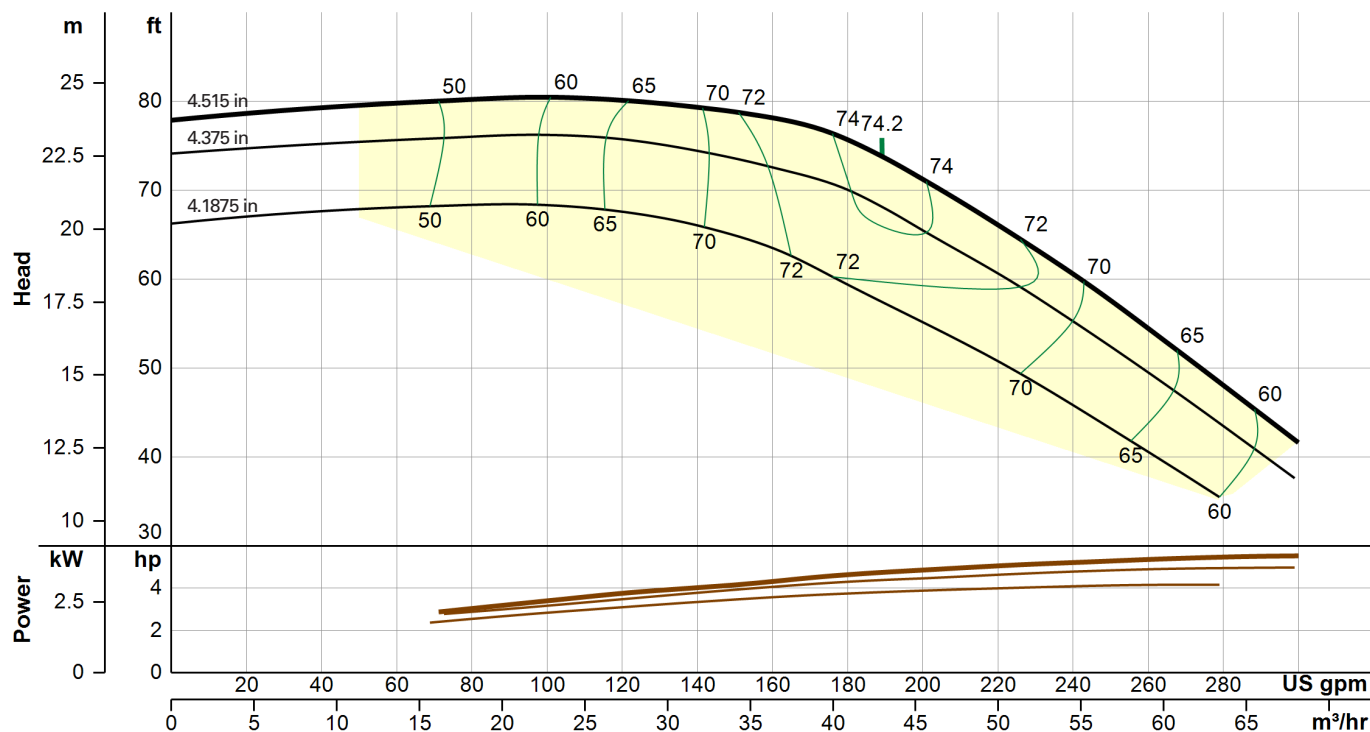

Curve reflects per stage performance for a minimum of 4 stages. For 1-3 stage units, refer to Wolf Pumps online catalog at PumpFlo Connect.

Tabled Performance Data


	4.515"		4.3125"		4.1875"	
GPM	TDH/STG	HP/STG	TDH/STG	HP/STG	TDH/STG	HP/STG
170	77.0	4.6	71.3	4.3	61.5	3.8
180	75.5	4.8	70.0	4.4	59.5	3.9
190	73.0	4.9	68.0	4.5	57.3	3.9
210	68.8	5.1	63.0	4.7	52.8	4.0


Mechanical Data

Bowl Shaft Diameter (in) 1
Disch Sizes Available (in) 3" F - 4"M
Motor Sizes Available (in) 6, 8
K factor 2.3
Runout NPSHr (ft) 30

Max Sphere Size (in) 0.55
Impeller Eye Area (square inches) 3.87
Impeller Type enclosed
Bowl Pressure Limits (psig) 560

1 stg weight (lbs) 49
Add stage weight (lbs) 16
Impeller weight (lbs) 2
Bowl Diameter (in) 5.84
Max Diameter w/ Cable Guard (in) 6.5
1 stg length (in) 17.15
Add stage length (in) 4.875

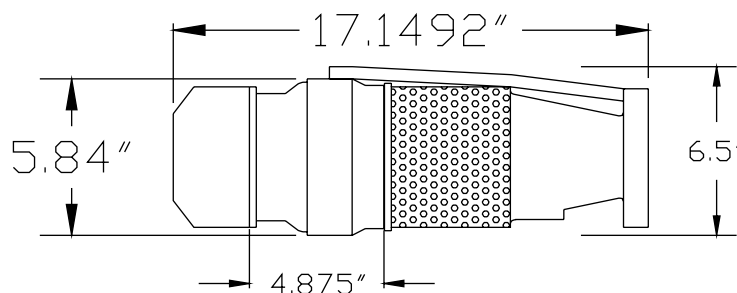

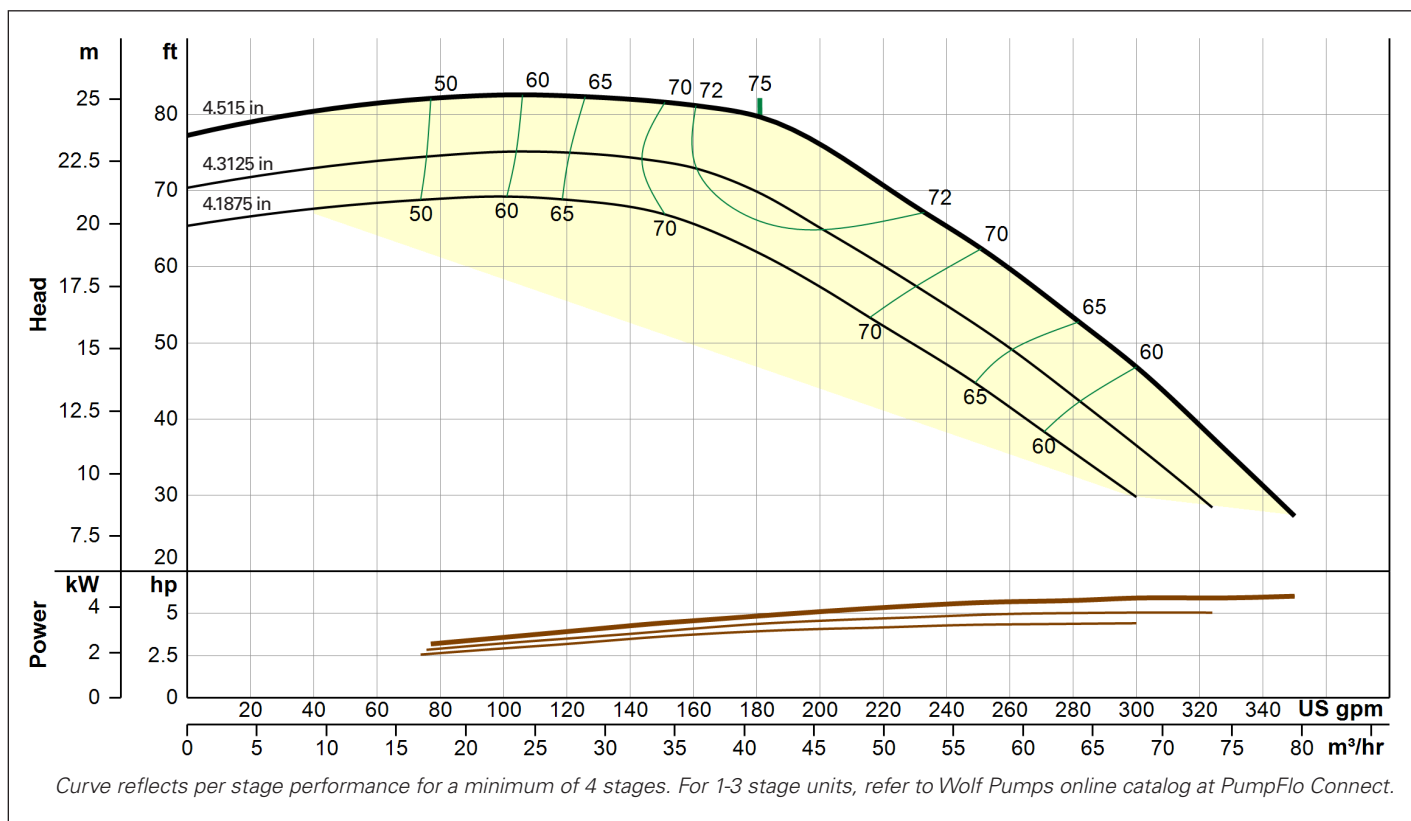


Tabled Performance Data


	4.515"		4.3125"		4.1875"	
GPM	TDH/STG	HP/STG	TDH/STG	HP/STG	TDH/STG	HP/STG
170	80.5	4.8	71.5	4.4	63.5	4.0
180	79.8	5.0	69.8	4.5	61.8	4.1
220	70.3	5.5	60.0	4.9	52.3	4.3
260	59.5	5.9	49.3	5.1	41.5	4.5

Mechanical Data

Bowl Shaft Diameter (in) 1
 Disch Sizes Available (in) 3" F - 4"M
 Motor Sizes Available (in) 6, 8
 K factor 2.3
 Runout NPSHr (ft) 33
 1 stg weight (lbs) 49
 Add stage weight (lbs) 16
 Impeller weight (lbs) 2.3
 Bowl Diameter (in) 5.84
 Max Diameter w/ Cable Guard (in) 6.5
 1 stg length (in) 17.15
 Add stage length (in) 4.875

Max Sphere Size (in) 0.55
 Impeller Eye Area (square inches) 3.87
 Impeller Type enclosed
 Bowl Pressure Limits (psig) 560

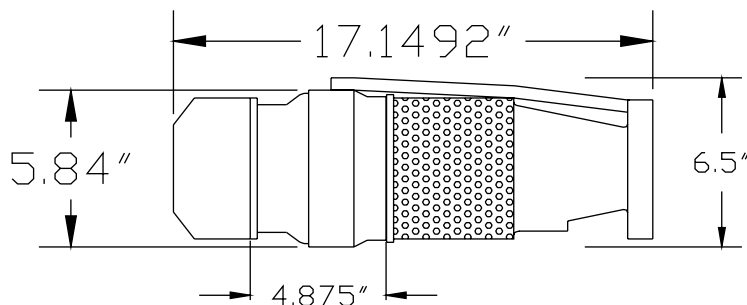

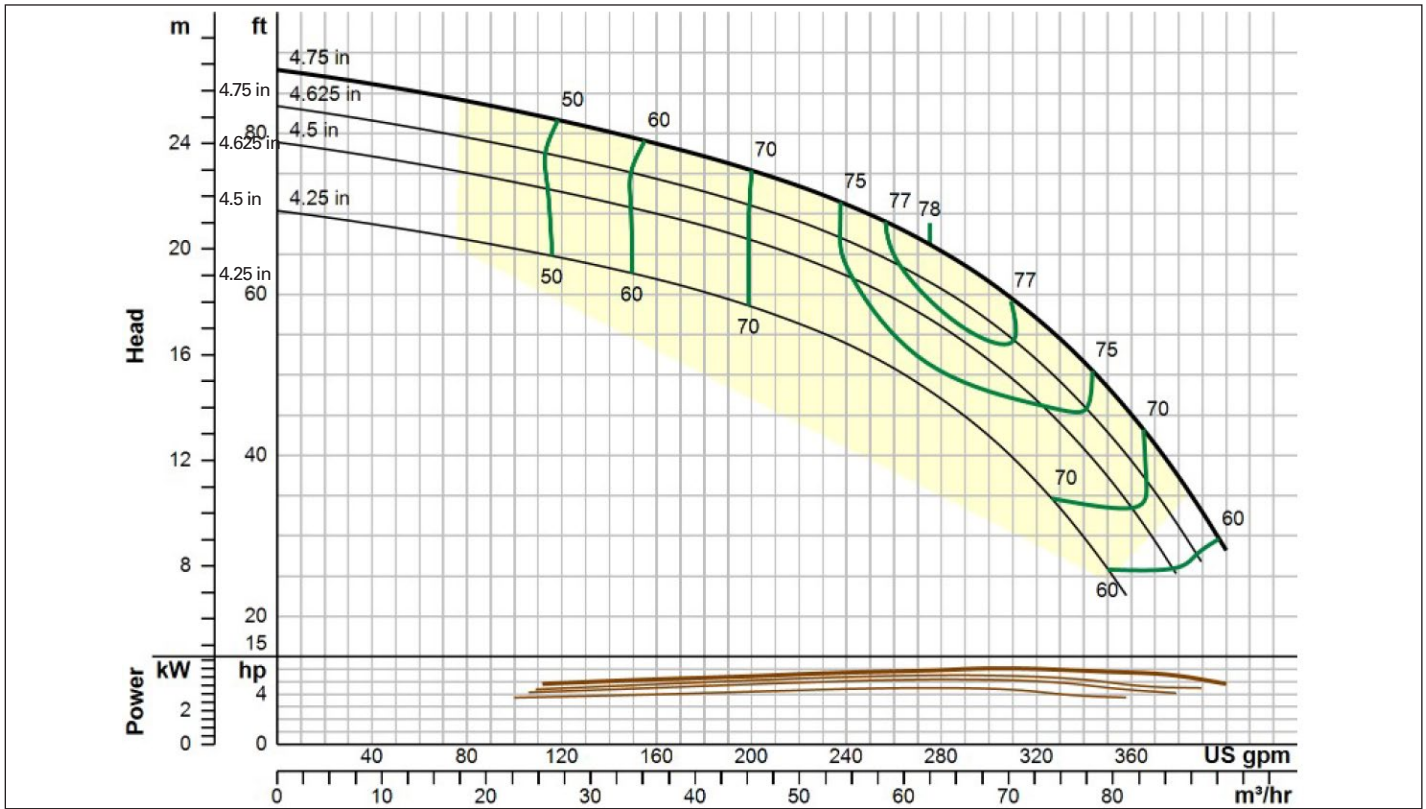

Curve reflects per stage performance for a minimum of 4 stages. For 1-3 stage units, refer to Wolf Pumps online catalog at PumpFlo Connect.


Tabled Performance Data


	4.75"		4.5"		4.25"	
GPM	TDH/STG	HP/STG	TDH/STG	HP/STG	TDH/STG	HP/STG
255	70.8	6.0	59.3	5.1	50.0	4.4
280	68.3	6.2	56.0	5.3	45.0	4.4
300	65.5	6.3	52.0	5.3	41.0	4.4
320	62.0	6.4	48.0	5.2	37.0	4.4

Mechanical Data

Bowl Shaft Diameter (in)	1
Disch Sizes Available (in)	4" F
Motor Sizes Available (in)	6, 8
K factor	
Runout NPSHr (ft)	32
1 stg weight (lbs)	56
Add stage weight (lbs)	19
Impeller weight (lbs)	2.5
Bowl Diameter (in)	5.93
Max Diameter w/ Cable Guard (in)	6.19
1 stg length (in)	17.25
Add stage length (in)	4.875

Max Sphere Size (in)	0.5
Impeller Eye Area (square inches)	3.87
Impeller Type	enclosed
Bowl Pressure Limits (psig)	560

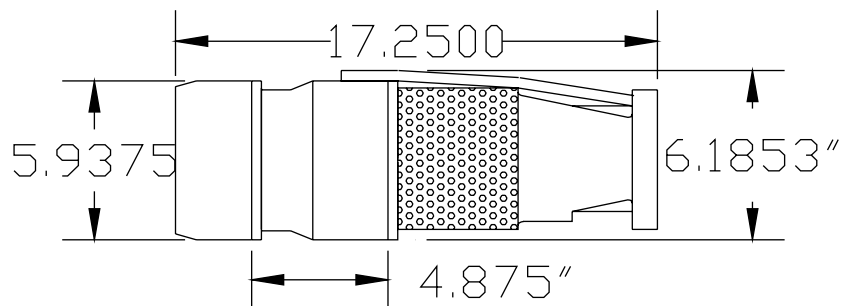

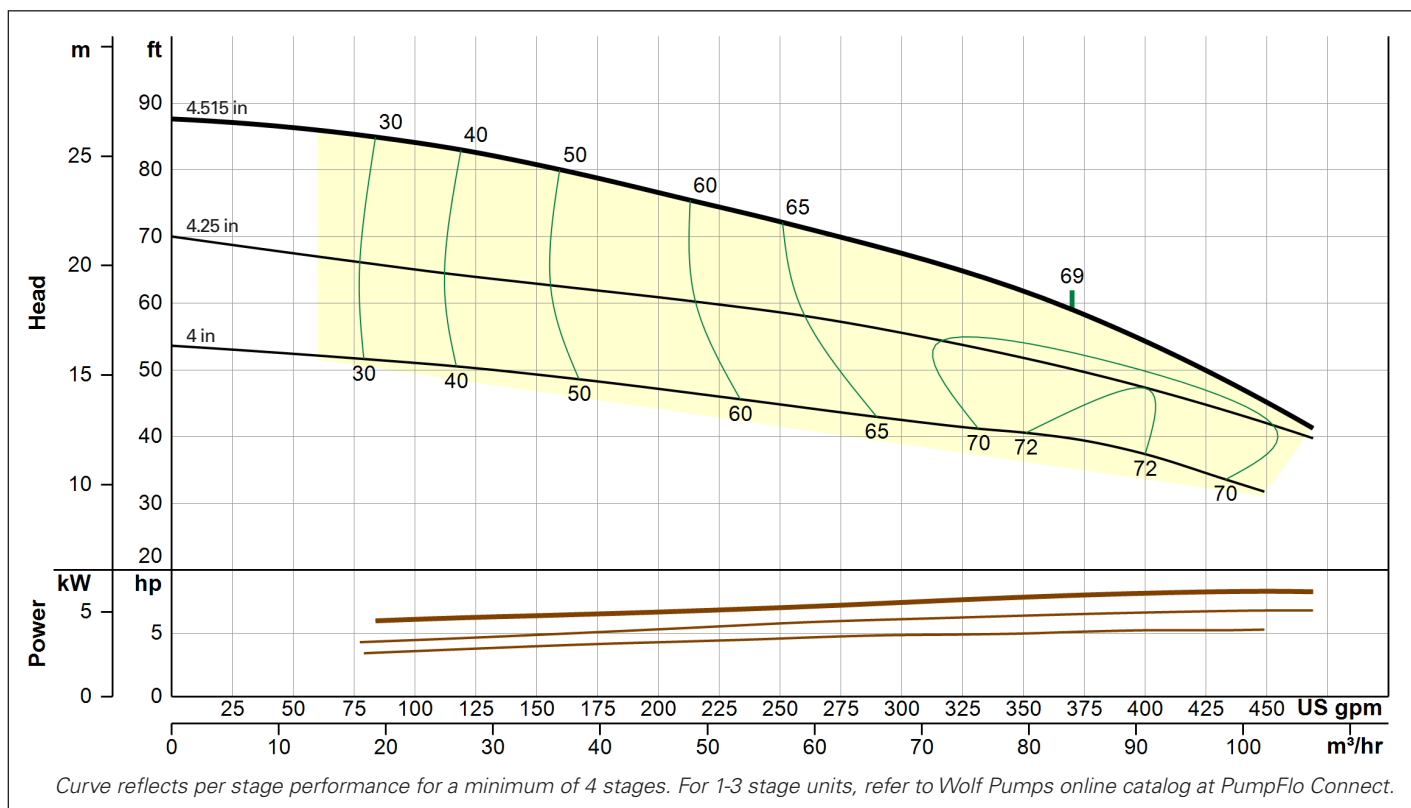


Tabled Performance Data

	4.515"		4.25"		4.0"	
GPM	TDH/STG	HP/STG	TDH/STG	HP/STG	TDH/STG	HP/STG
300	66.8	7.6	55.5	6.2	42.5	4.9
370	59.0	8.1	49.8	6.6	39.8	5.2
400	54.3	8.3	47.3	6.7	37.5	5.3
425	50.0	8.4	44.8	6.8	34.5	5.3


Mechanical Data

Bowl Shaft Diameter (in) 1
 Disch Sizes Available (in) 3" F - 4" M
 Motor Sizes Available (in) 6, 8
 K factor 3.4
 Runout NPSHr (ft) 34
 1 stg weight (lbs) 47
 Add stage weight (lbs) 15
 Impeller weight (lbs) 2.4
 Bowl Diameter (in) 5.95
 Max Diameter w/ Cable Guard (in) 6.5
 1 stg length (in) 17.21
 Add stage length (in) 4.875

Max Sphere Size (in) 0.35
 Impeller Eye Area (square inches) 3.87
 Impeller Type enclosed
 Bowl Pressure Limits (psig) 365

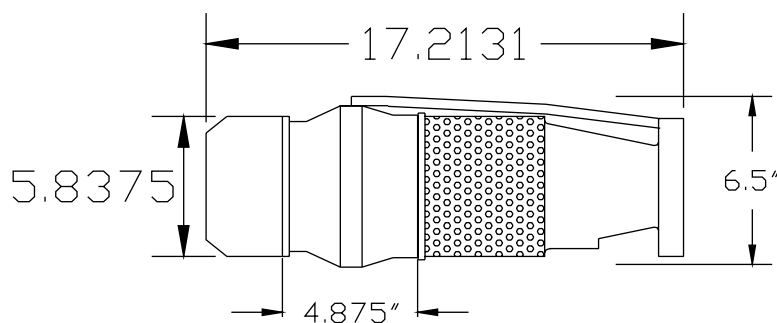

6" Pump Curves

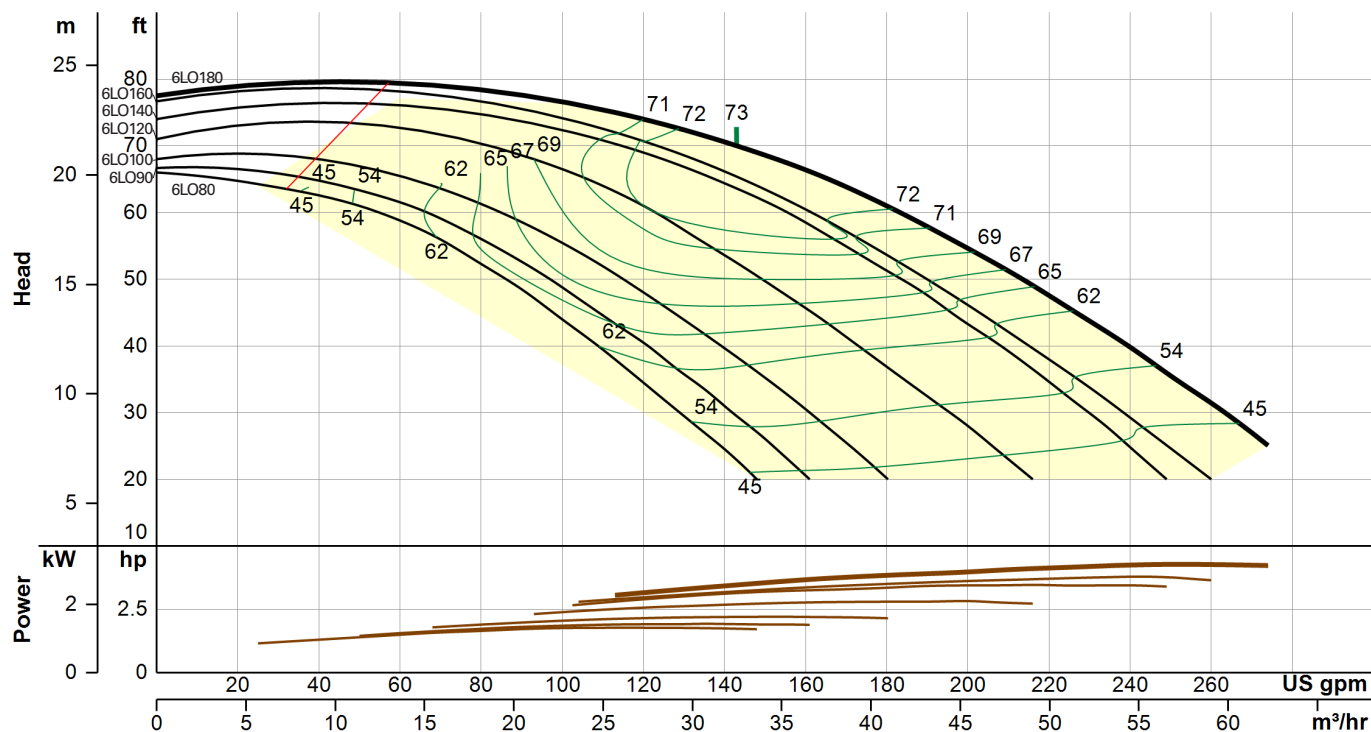


Curve reflects per stage performance for a minimum of 4 stages. For 1-3 stage units, refer to Wolf Pumps online catalog at PumpFlo Connect.


Mechanical Data

Bowl Shaft Diameter (in) 1
Disch Sizes Available (in) 3"F-4"M
Motor Sizes Available (in) 6
K factor 3.1
Runout NPSHr (ft) 30

Max Sphere Size (in) 0.08 - .45
Impeller Eye Area (square inches) 2.85
Impeller Type open
Bowl Pressure Limits (psig) 560

1 stg weight (lbs) 49
Add stage weight (lbs) 16
Impeller weight (lbs) 1
Bowl Diameter (in) 5.84
Max Diameter w/ Cable Guard (in) 6.5
1 stg length (in) 17.15
Add stage length (in) 4.875"

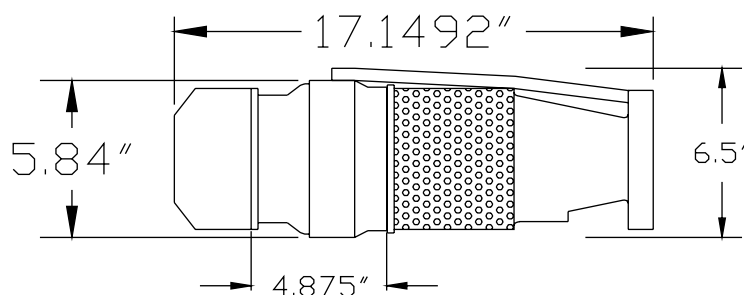

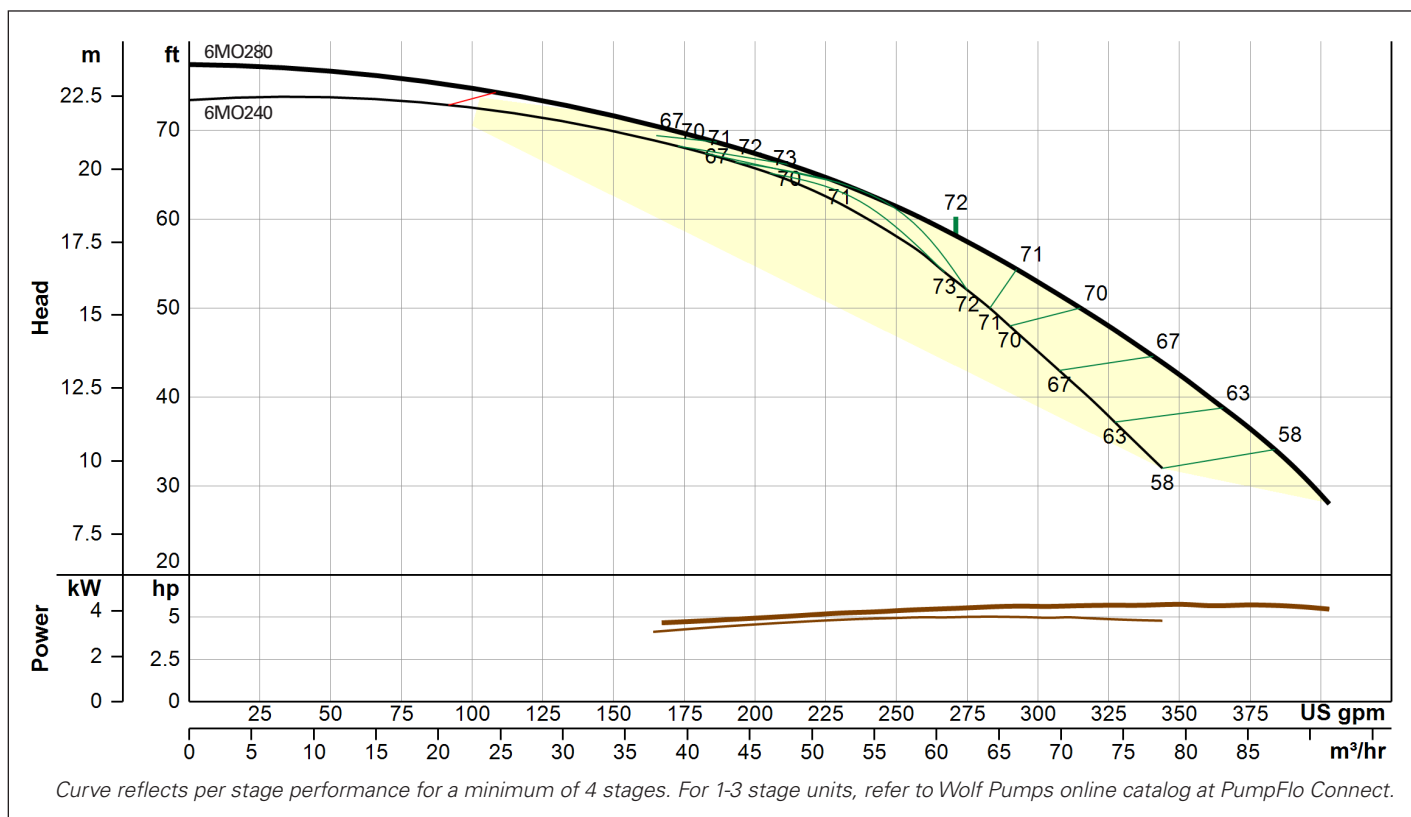


Mechanical Data

Bowl Shaft Diameter (in) 1
Disch Sizes Available (in) 4" F
Motor Sizes Available (in) 6
K factor 3.1
Runout NPSHr (ft) 33

Max Sphere Size (in) 0.5
Impeller Eye Area (square inches) 3.365
Impeller Type open
Bowl Pressure Limits (psig) 560

1 stg weight (lbs) 55
Add stage weight (lbs) 18
Impeller weight (lbs) 1
Bowl Diameter (in) 5.93
Max Diameter w/ Cable Guard (in) 6.19
1 stg length (in) 17.25
Add stage length (in) 4.875

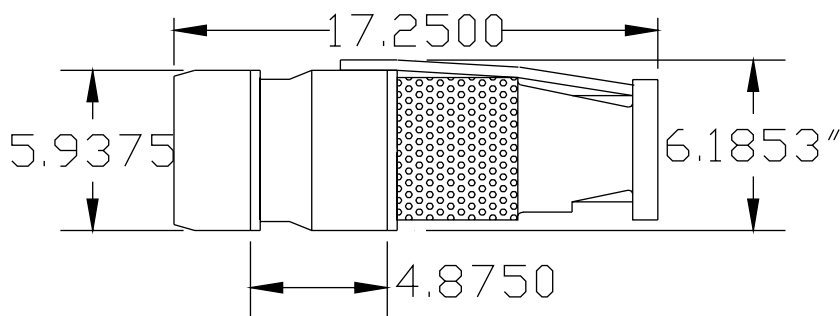

7" Pump Curve

pages 32-36

7-INCH SUBMERSIBLE TURBINE


7MH SERIES

Each pump is personally built by our expert craftsmen and then passed through our world-class testing facility to ensure your exact specifications are met.

- Produces up to 1100 GPM
- 5 vane or 7 vane investment cast impellers
- Stainless steel impeller construction
- Easily fits in 8" casing

In most cases, Wolf can take an order and ship within 48 hours, truly delivering on our promise: Right Pump. Right Now.



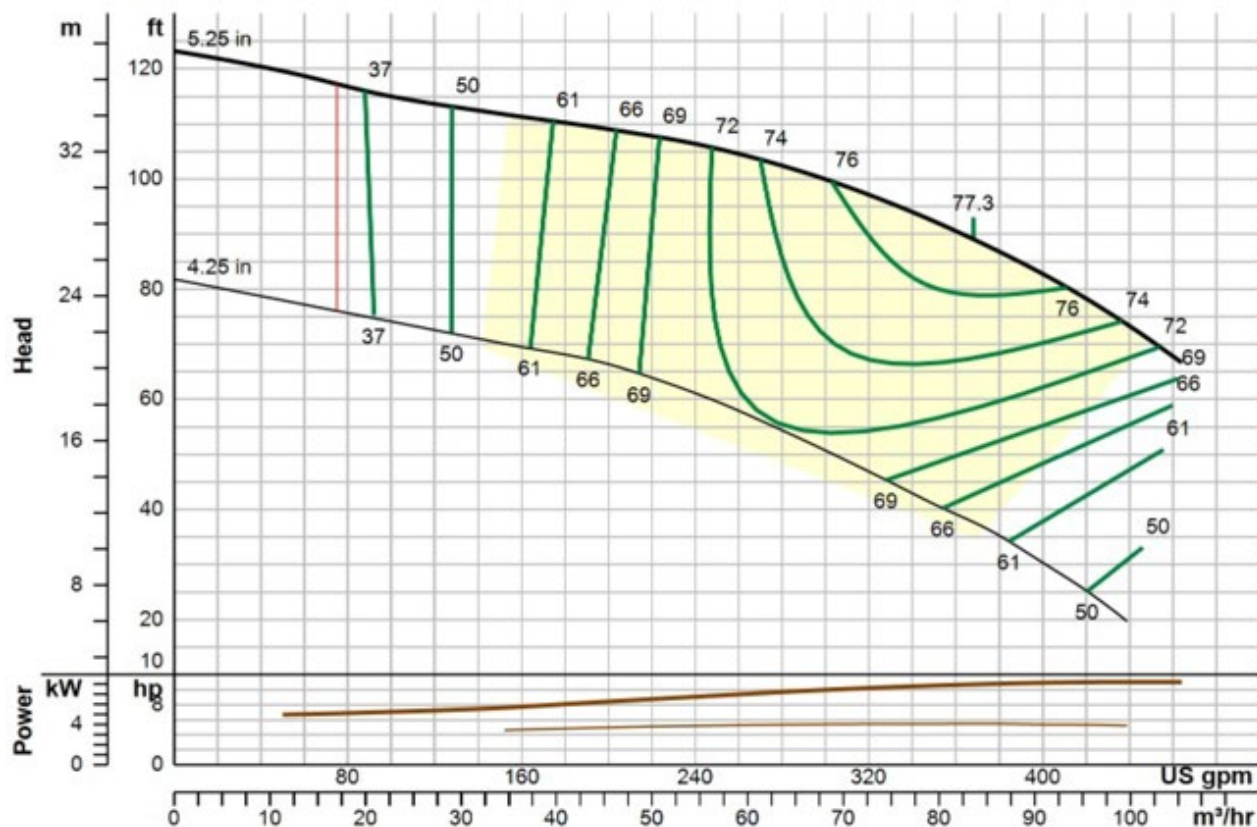

Curve reflects per stage performance for a minimum of 4 stages. For 1-3 stage units, refer to Wolf Pumps online catalog at PumpFlo Connect.

Tabled Performance Data


	5.25"		4.75"		4.25"	
GPM	TDH/STG	HP/STG	TDH/STG	HP/STG	TDH/STG	HP/STG
300	95.8	9.5	71.8	7	46.8	4.5
330	91.5	9.8	66.3	7	41.5	4.4
360	86	9.9	60.5	7.1	35.8	4.3
400	77.8	10.2	52.3	7	26	3.6


Mechanical Data

Bowl Shaft Diameter (in) 1.18
Disch Sizes Available (in) 4, 5, 6
Motor Sizes Available (in) 6, 8
K factor 3.5
Runout NPSHr (ft) 18

Max Sphere Size (in) 0.43
Impeller Eye Area (square inches) 7.54
Impeller Type enclosed
Bowl Pressure Limits (psig) 415

1 stg weight (lbs) 75
Add stage weight (lbs) 28
Impeller weight (lbs) 3.1
Bowl Diameter (in) 7.13
Max Diameter w/ Cable Guard (in) 7.63
1 stg length (in) 6-25.63, 8-35.63
Add stage length (in) 6.38

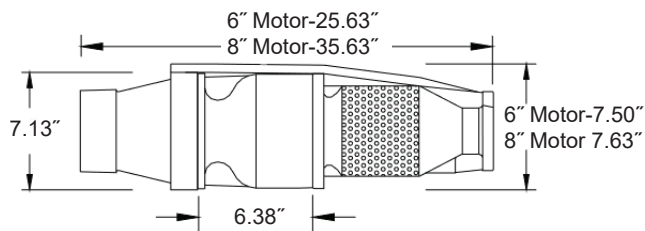

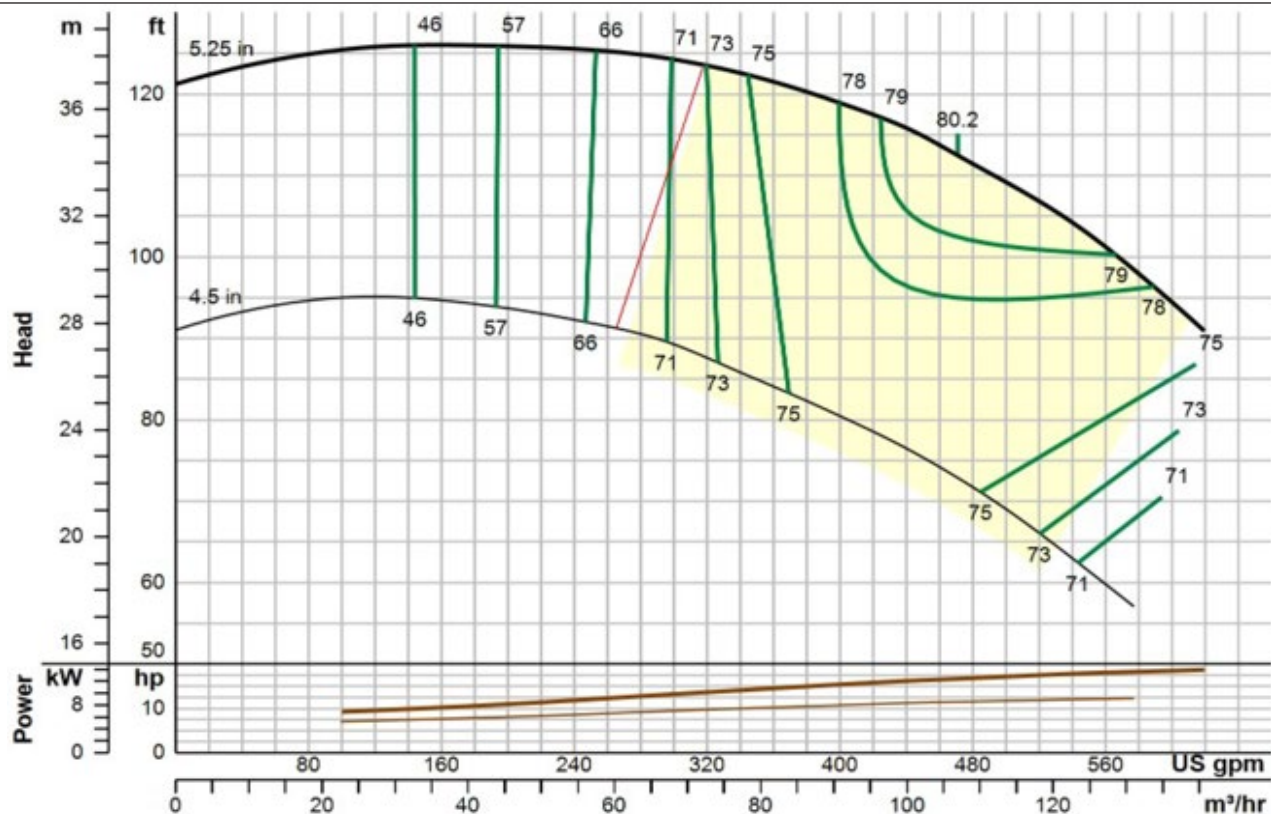

Curve reflects per stage performance for a minimum of 4 stages. For 1-3 stage units, refer to Wolf Pumps online catalog at PumpFlo Connect.


Tabled Performance Data


	5.25"		5"		4.5"	
GPM	TDH/STG	HP/STG	TDH/STG	HP/STG	TDH/STG	HP/STG
390	120.3	14.9	106	12.8	80.5	9.9
440	115.8	15.9	100.5	13.6	74.8	10.4
475	111.3	16.5	95.8	14.1	69.8	10.7
500	107.5	16.8	92	14.4	65.8	11

Mechanical Data

Bowl Shaft Diameter (in)	1.18
Disch Sizes Available (in)	4, 5, 6
Motor Sizes Available (in)	6, 8
K factor	3.5
Runout NPSHr (ft)	28
1 stg weight (lbs)	75
Add stage weight (lbs)	28
Impeller weight (lbs)	3.1
Bowl Diameter (in)	7.13
Max Diameter w/ Cable Guard (in)	7.63
1 stg length (in)	6-25.63, 8-35.63
Add stage length (in)	6.38

Max Sphere Size (in)	0.43
Impeller Eye Area (square inches)	7.54
Impeller Type	enclosed
Bowl Pressure Limits (psig)	415

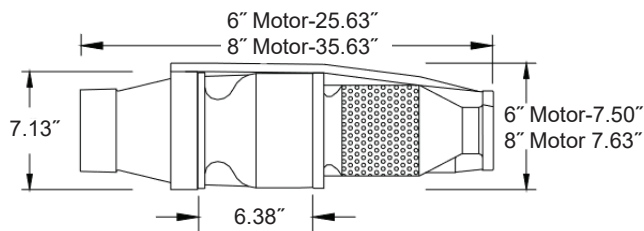

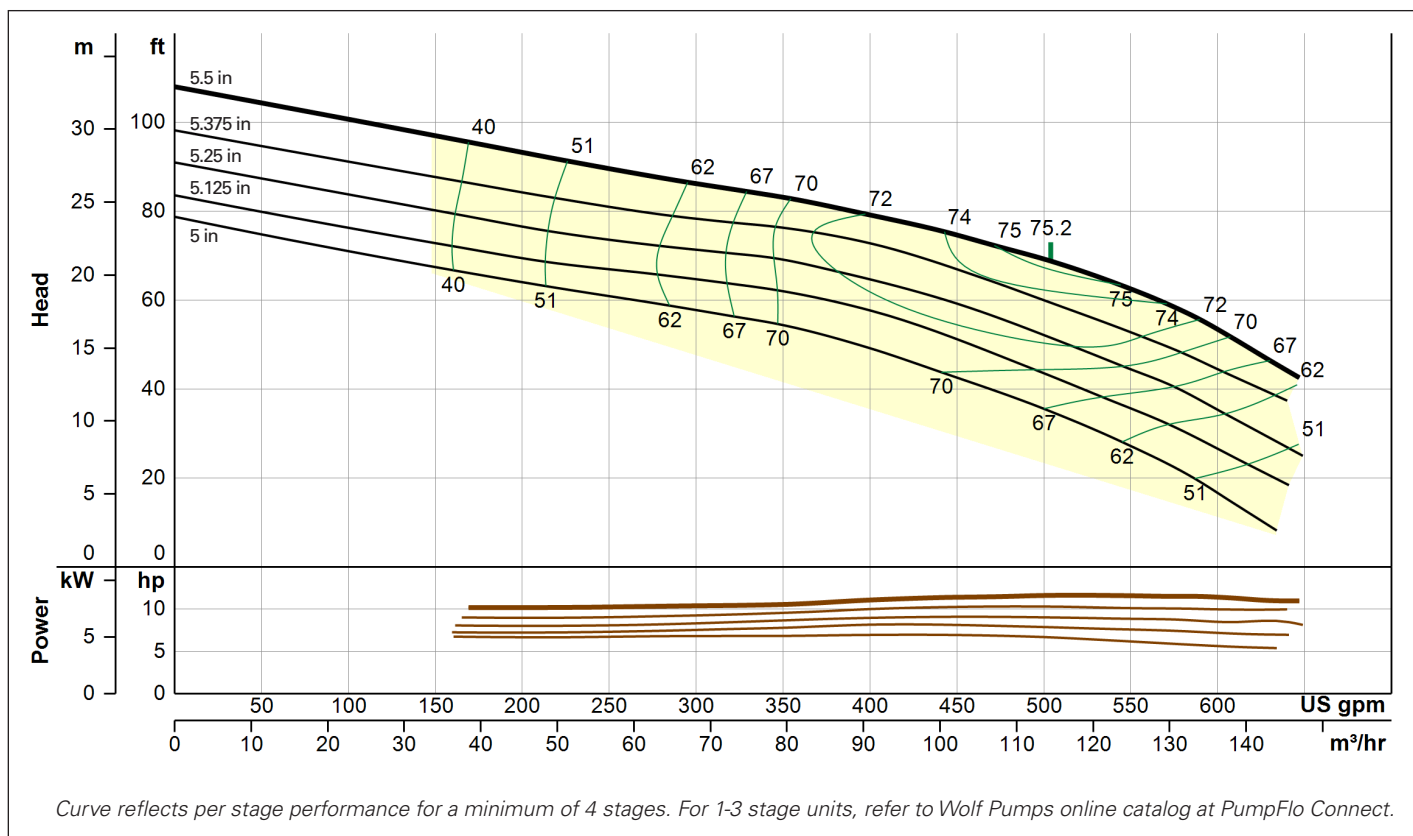


Tabled Performance Data


	5.5"		5.25"		5.0"	
GPM	TDH/STG	HP/STG	TDH/STG	HP/STG	TDH/STG	HP/STG
400	78.0	10.9	63.5	8.8	48.3	6.96
450	73.5	11.2	58.3	9.0	41.8	6.8
500	68.3	11.4	51.0	8.9	34.8	6.6
550	61.3	11.4	43.5	8.7	26.3	6.1

Mechanical Data

Bowl Shaft Diameter (in)	1.18
Disch Sizes Available (in)	5" F - 6"M
Motor Sizes Available (in)	6, 8
K factor	5.2
Runout NPSHr (ft)	32
1 stg weight (lbs)	100
Add stage weight (lbs)	34
Impeller weight (lbs)	5.9
Bowl Diameter (in)	7
Max Diameter w/ Cable Guard (in)	7.5
1 stg length (in)	24.75
Add stage length (in)	7

Max Sphere Size (in)	0.5
Impeller Eye Area (square inches)	12.1
Impeller Type	enclosed
Bowl Pressure Limits (psig)	463

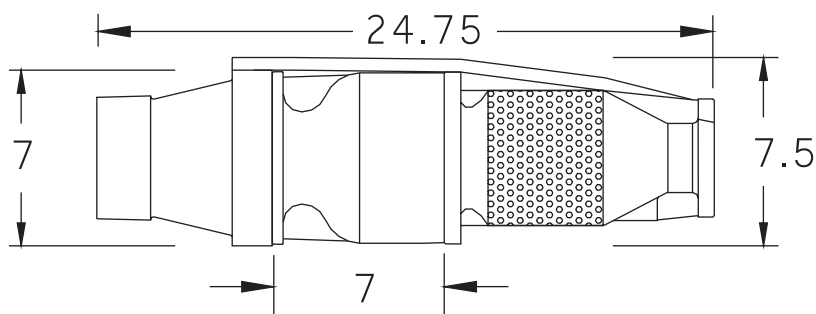

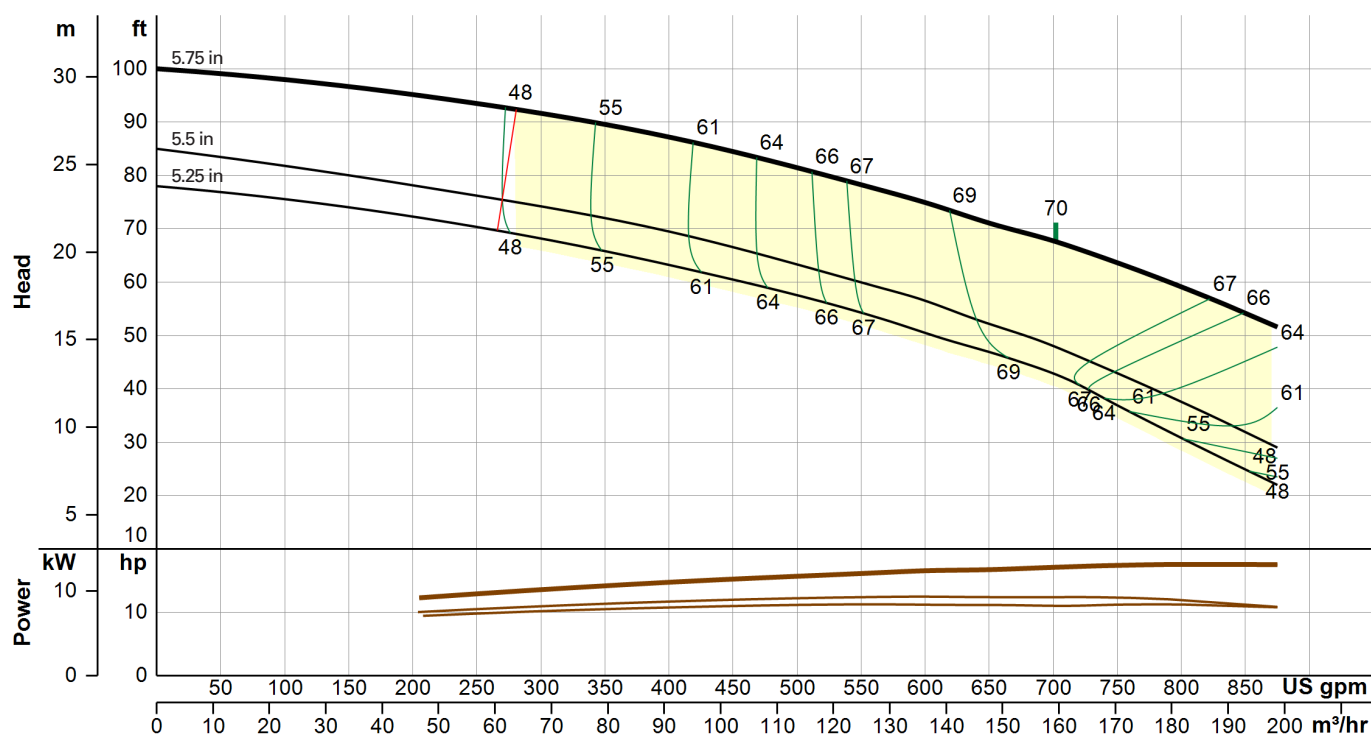

Curve reflects per stage performance for a minimum of 4 stages. For 1-3 stage units, refer to Wolf Pumps online catalog at PumpFlo Connect.

Tabled Performance Data


	5.75"		5.5"		5.25"	
GPM	TDH/STG	HP/STG	TDH/STG	HP/STG	TDH/STG	HP/STG
640	71.8	17.1	53.0	12.4	47.5	11.2
665	70.0	16.7	51.0	12.4	45.8	11.2
700	67.8	16.9	48.0	12.4	42.8	11.0
750	63.5	17.4	42.8	12.2	37.0	11.2

Mechanical Data

Bowl Shaft Diameter (in) 1.18
Disch Sizes Available (in) 5" F - 6" M
Motor Sizes Available (in) 6, 8
K factor 5.2
Runout NPSHr (ft) 34

Max Sphere Size (in) 0.5
Impeller Eye Area (square inches) 12.1
Impeller Type enclosed
Bowl Pressure Limits (psig) 463

1 stg weight (lbs) 100
Add stage weight (lbs) 34
Impeller weight (lbs) 6.1
Bowl Diameter (in) 7
Max Diameter w/ Cable Guard (in) 7.5
1 stg length (in) 24.75
Add stage length (in) 7

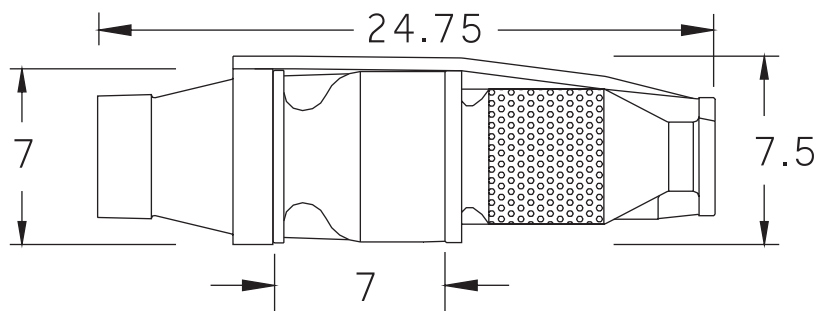

8" Pump Curve

pages 37-42


The Wolf Advantage

Your reputation is staked on the pumps you put in the ground. At Wolf Pumps, we stand behind you by using only premium components. Every detail matters: from the thread design in our bowls, to the way we store our shafts, to the precision trim options in our impellers. We leave nothing to chance.

BOWLS *Intelligently designed*


Concealed, water-tight IntelliThread design threads together with ease and prohibits water penetration.

Designed for quick assembly and field repairability. 4, 5, 6, 7, 8 & 10 in. sizes available.

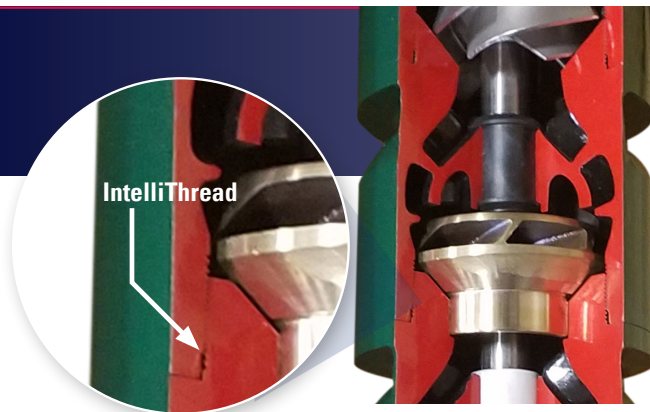

Robust casting has a 23% heavier wall thickness than competitors.


Extends the life of your pump even in the harshest well conditions.

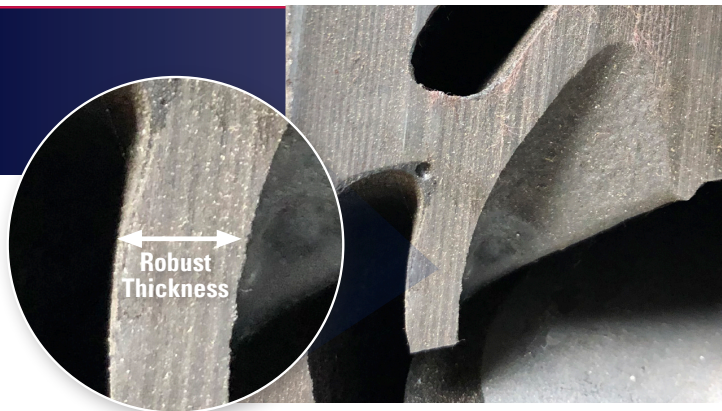

Available in cast iron, glass-lined or ductile iron, our bowls feature a smooth, high-flow design that has a 12% larger internal diameter than bolt together bowls.

A high-efficiency pump that provides more flow with less horsepower.



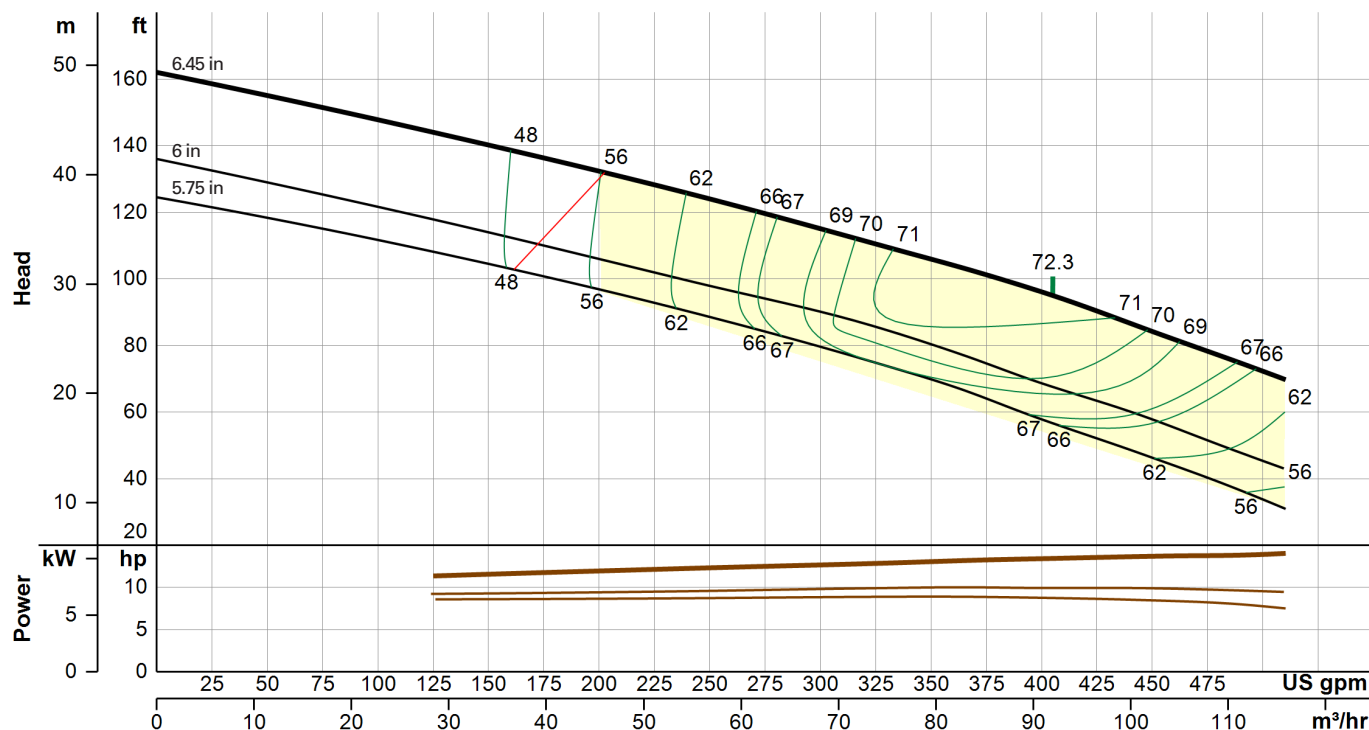

Curve reflects per stage performance for a minimum of 4 stages. For 1-3 stage units, refer to Wolf Pumps online catalog at PumpFlo Connect.

Tabled Performance Data


	6.45"		6.0"		5.75"	
GPM	TDH/STG	HP/STG	TDH/STG	HP/STG	TDH/STG	HP/STG
275	119.5	12.5	93.8	9.7	84.0	8.8
325	110.5	12.9	85.5	9.9	74.8	8.9
405	95.0	13.4	67.8	9.85	56.8	8.7
450	84.3	13.7	57.8	9.9	46.3	8.5


Mechanical Data

Bowl Shaft Diameter (in) 1.18
Disch Sizes Available (in) 4"F - 8"F
Motor Sizes Available (in) 6, 8
K factor 2.6
Runout NPSHr (ft) 30

Max Sphere Size (in) 0.45
Impeller Eye Area (square inches) 7.43
Impeller Type enclosed
Bowl Pressure Limits (psig) 500

1 stg weight (lbs) 101
Add stage weight (lbs) 34.5
Impeller weight (lbs) 6.4
Bowl Diameter (in) 7.66
Max Diameter w/ Cable Guard (in) 8.25
1 stg length (in) 26.25
Add stage length (in) 6.62

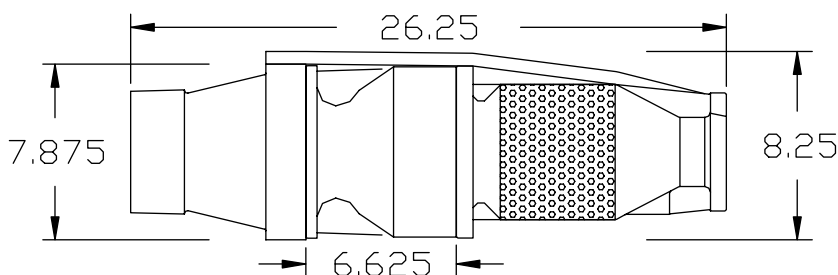

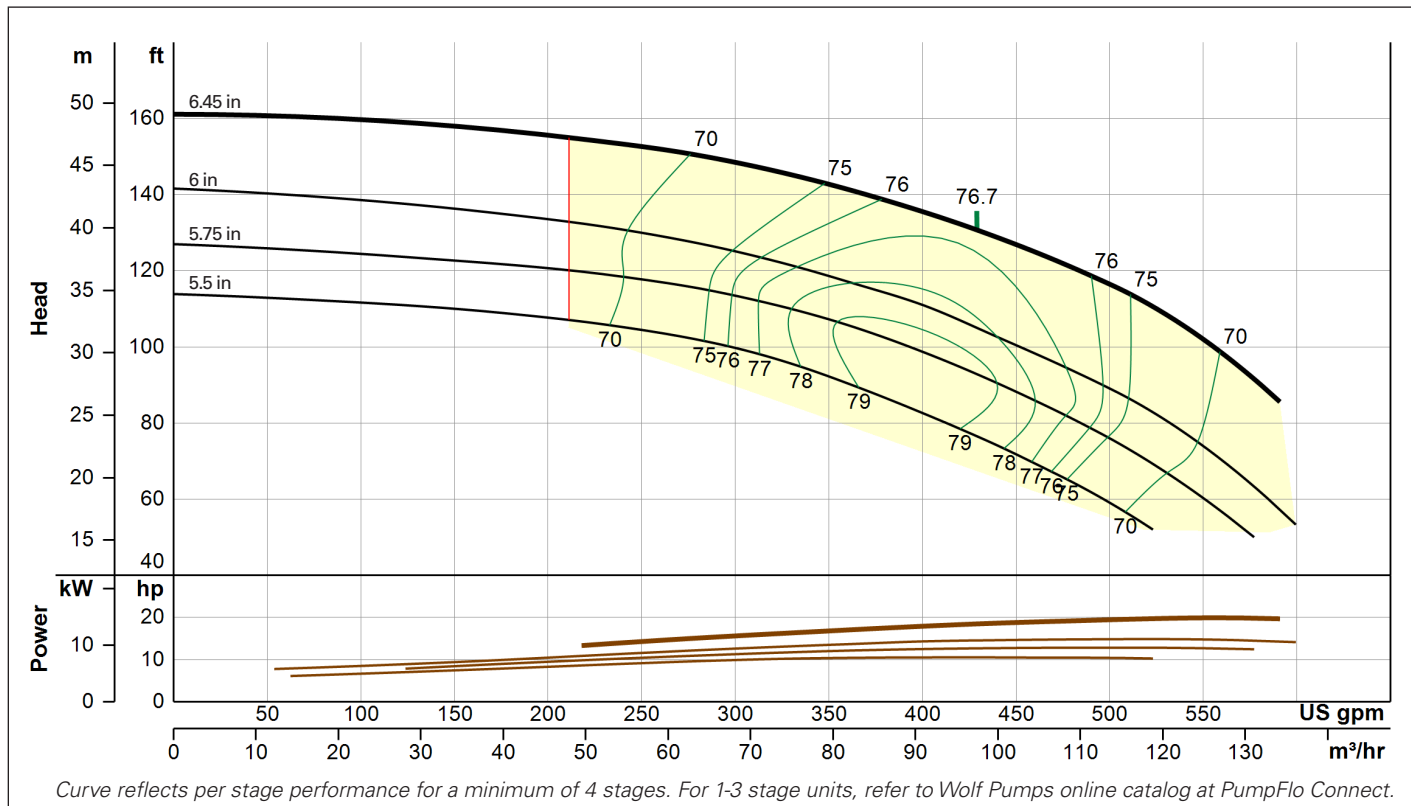

Tabled Performance Data


	6.45"		6.0"		5.5"	
GPM	TDH/STG	HP/STG	TDH/STG	HP/STG	TDH/STG	HP/STG
350	142.8	16.8	118.5	13.5	92.3	10.4
400	135.3	17.9	111.0	14.3	82.5	10.5
425	131.3	18.4	105.8	14.5	77.5	10.5
475	121.8	19.1	95.0	14.8	65.8	10.5


Mechanical Data

Bowl Shaft Diameter (in) 1.18
Disch Sizes Available (in) 4"F - 8"F
Motor Sizes Available (in) 6, 8
K factor 2.6
Runout NPSHr (ft) 30

Max Sphere Size (in) 0.45
Impeller Eye Area (square inches) 7.43
Impeller Type enclosed
Bowl Pressure Limits (psig) 500

1 stg weight (lbs) 100
Add stage weight (lbs) 34
Impeller weight (lbs) 5.9
Bowl Diameter (in) 7.66
Max Diameter w/ Cable Guard (in) 8.25
1 stg length (in) 26.25
Add stage length (in) 6.62

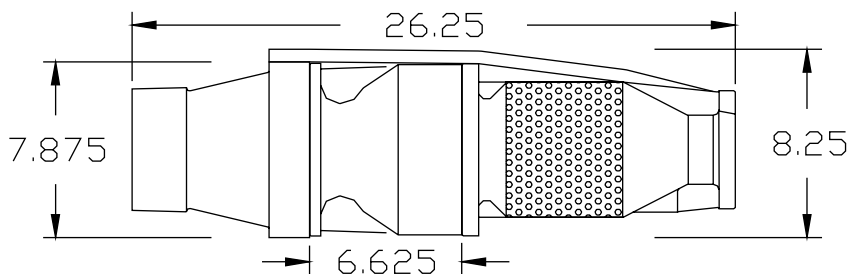

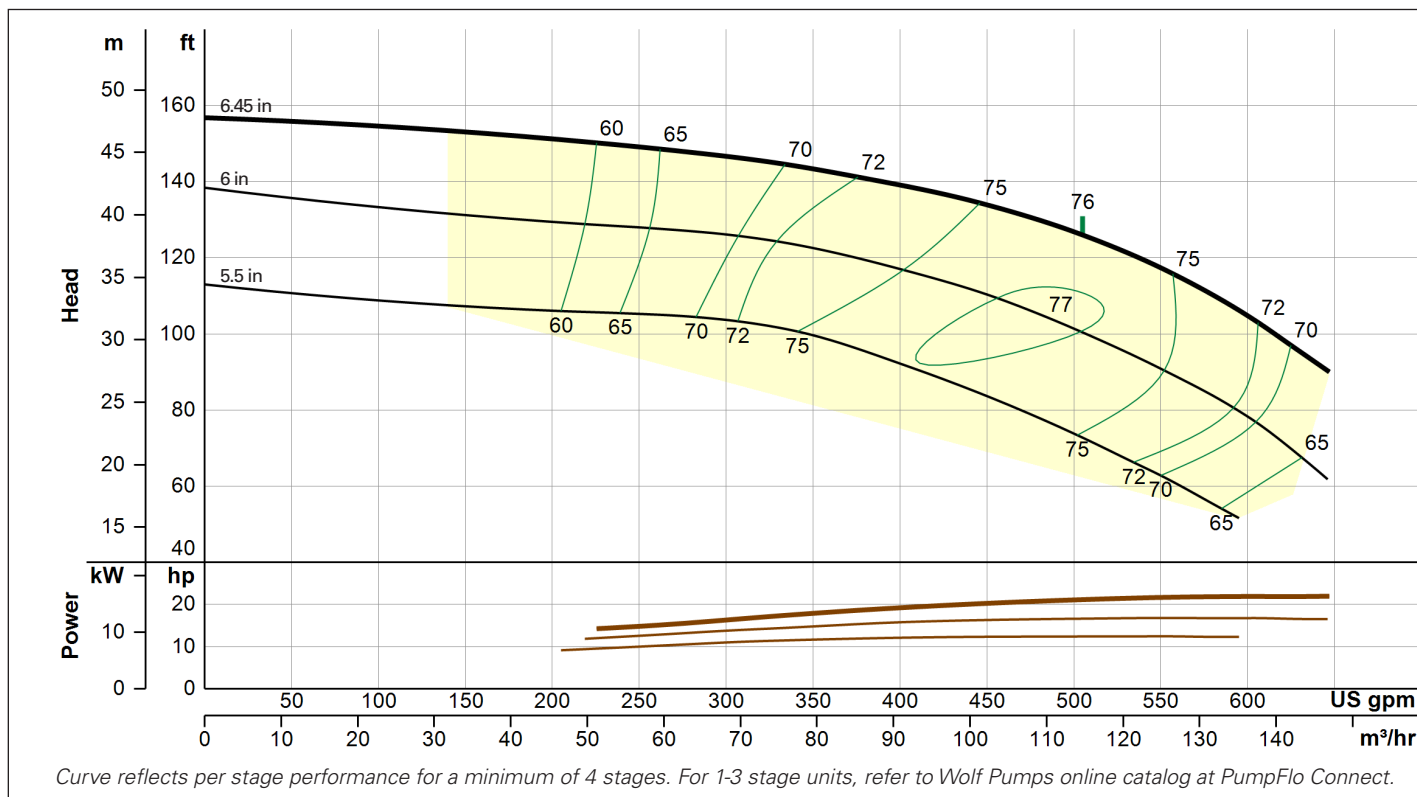

Tabled Performance Data


	6.45"		6.0"		5.5"	
GPM	TDH/STG	HP/STG	TDH/STG	HP/STG	TDH/STG	HP/STG
405	138.5	19.3	116.5	15.8	91.5	12.2
480	129.5	20.7	105.3	16.5	77.5	12.4
505	126.0	21.1	100.5	16.6	72.8	12.4
550	117.3	21.6	90.8	16.8	62.8	12.5


Mechanical Data

Bowl Shaft Diameter (in) 1.18
Disch Sizes Available (in) 4"F - 8"F
Motor Sizes Available (in) 6, 8
K factor 2.6
Runout NPSHr (ft) 40

Max Sphere Size (in) 0.57
Impeller Eye Area (square inches) 7.43
Impeller Type enclosed
Bowl Pressure Limits (psig) 500

1 stg weight (lbs) 100
Add stage weight (lbs) 34
Impeller weight (lbs) 5.8
Bowl Diameter (in) 7.66
Max Diameter w/ Cable Guard (in) 8.25
1 stg length (in) 26.25
Add stage length (in) 6.62

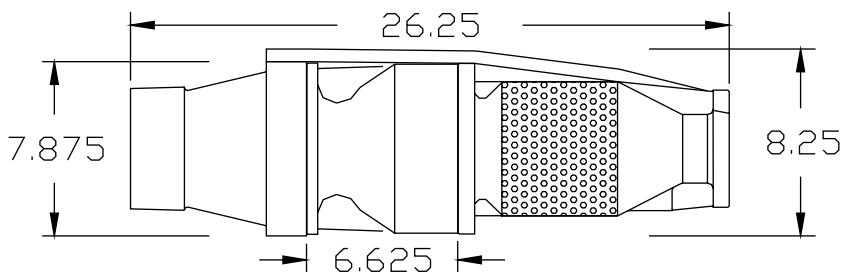

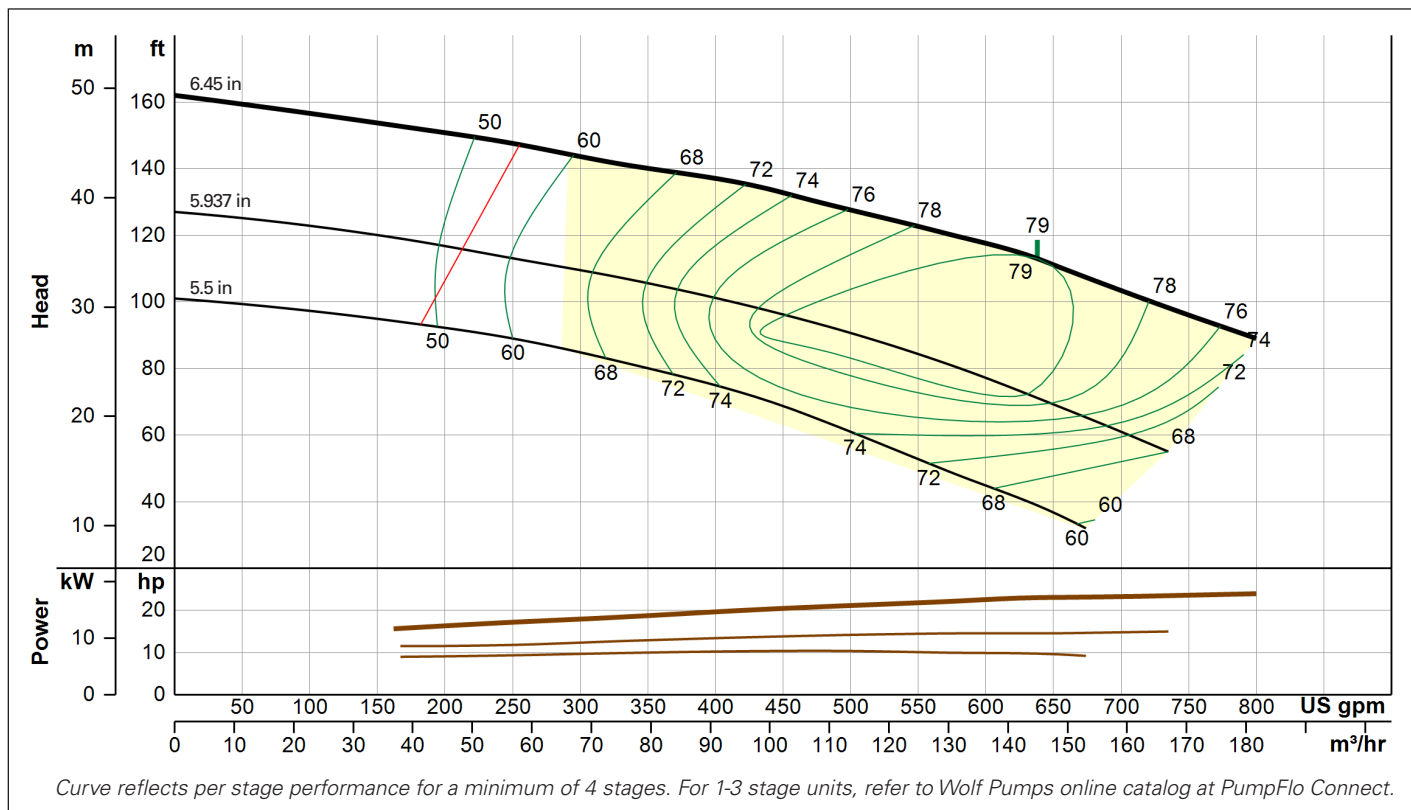

8" Pump Curves

Tabled Performance Data


	6.45"		5.937"		5.5"	
GPM	TDH/STG	HP/STG	TDH/STG	HP/STG	TDH/STG	HP/STG
455	132.5	20.6	95.8	13.9	68.0	10.4
500	127.5	21.2	90.8	14.2	61.0	10.3
640	112.8	23.1	71.3	14.6	38.3	9.7
700	103.8	23.4	61.3	15.1		


Mechanical Data

Bowl Shaft Diameter (in) 1.18
Disch Sizes Available (in) 4"F - 8"F
Motor Sizes Available (in) 6, 8
K factor 5.5
Runout NPSHr (ft) 40

Max Sphere Size (in) 0.74
Impeller Eye Area (square inches) 7.43
Impeller Type enclosed
Bowl Pressure Limits (psig) 325

1 stg weight (lbs) 104
Add stage weight (lbs) 37
Impeller weight (lbs) 5.9
Bowl Diameter (in) 7.67
Max Diameter w/ Cable Guard (in) 8.25
1 stg length (in) 27.19
Add stage length (in) 7.44

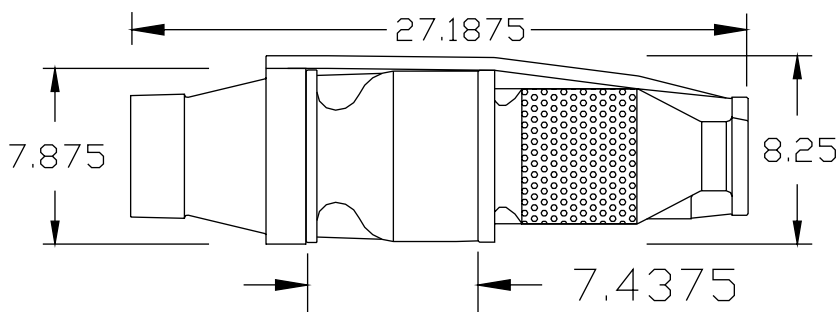

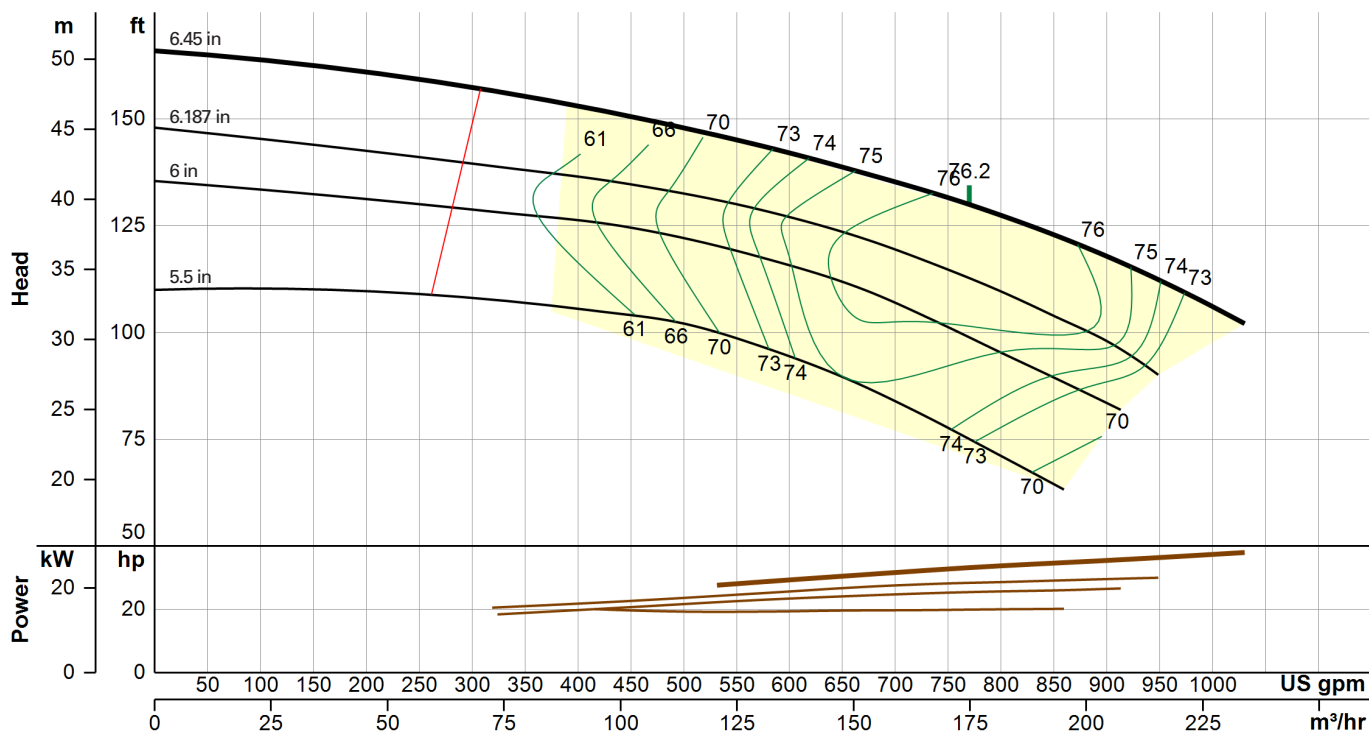

Curve reflects per stage performance for a minimum of 4 stages. For 1-3 stage units, refer to Wolf Pumps online catalog at PumpFlo Connect.


Tabled Performance Data

	6.45"		6.0"		5.5"	
GPM	TDH/STG	HP/STG	TDH/STG	HP/STG	TDH/STG	HP/STG
650	138.8	30.5	111.5	24.1	89.5	19.6
675	137.0	31.0	109.5	24.4	86.8	19.7
770	130.0	33.3	98.8	25.5	75.0	19.9
800	127.0	33.8	95.3	25.8	71.0	20.0

Mechanical Data

Bowl Shaft Diameter (in)	1.18
Disch Sizes Available (in)	4" F - 8" F
Motor Sizes Available (in)	6, 8
K factor	5.5
Runout NPSHr (ft)	43
1 stg weight (lbs)	104
Add stage weight (lbs)	37
Impeller weight (lbs)	6
Bowl Diameter (in)	7.67
Max Diameter w/ Cable Guard (in)	8.25
1 stg length (in)	27.19
Add stage length (in)	7.44

Max Sphere Size (in)	0.74
Impeller Eye Area (square inches)	7.43
Impeller Type	enclosed
Bowl Pressure Limits (psig)	325

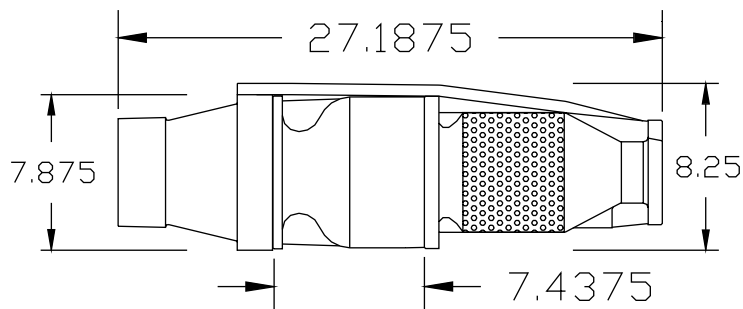

9" Pump Curve

43-45




Right Pump. Right Now.®

WE ARE COMMITTED TO MINIMIZING PRODUCTION LEAD TIMES.

When we receive your order, we consider it a privilege and an opportunity to impress you.

Everyone in our facility knows that we have received your order and works toward the goal of shipping it to you as quickly as possible.

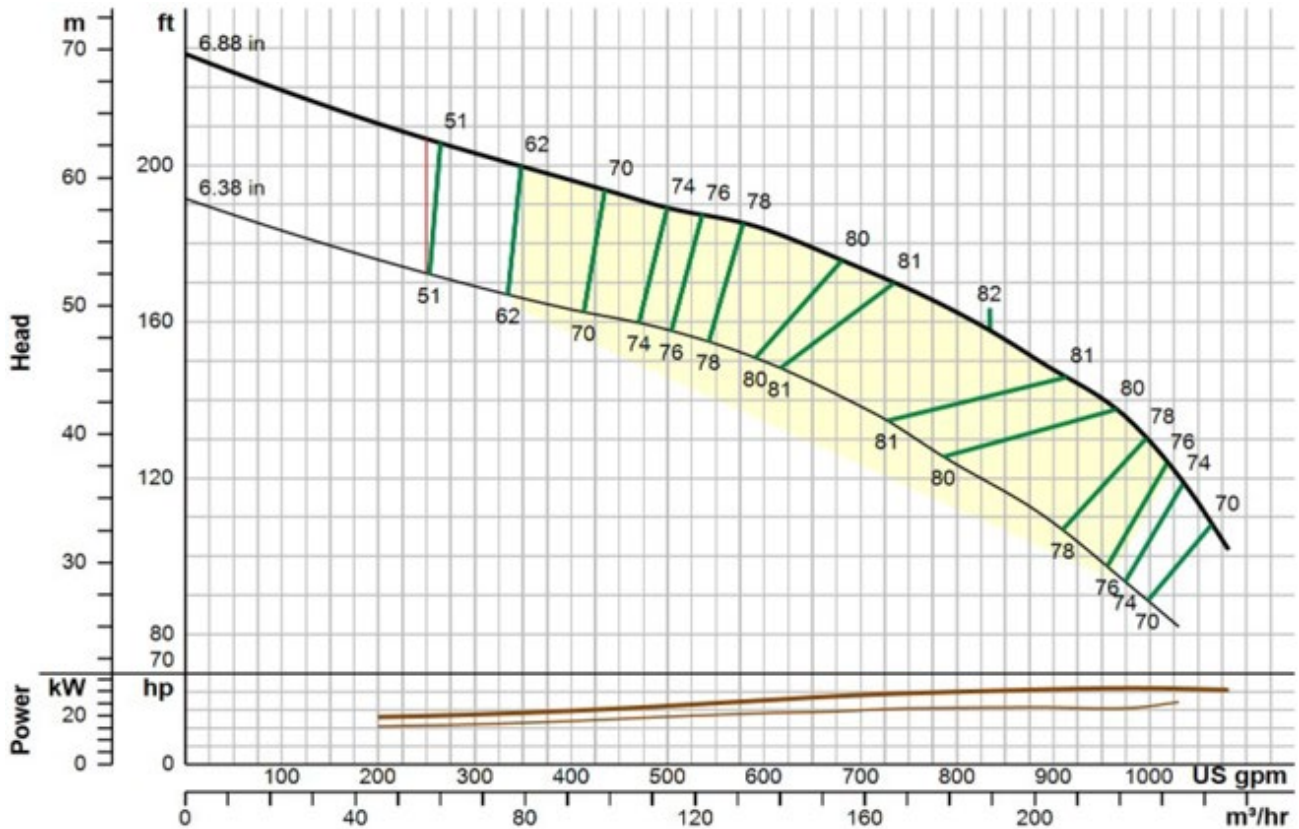

Curve reflects per stage performance for a minimum of 4 stages. For 1-3 stage units, refer to Wolf Pumps online catalog at PumpFlo Connect.

Tabled Performance Data


	6.88"		6.5"		6.38"	
GPM	TDH/STG	HP/STG	TDH/STG	HP/STG	TDH/STG	HP/STG
760	158.3	35.8	135	30.5	127.3	28.8
780	156.5	36.3	132.5	30.8	124.8	28.8
840	150	37.3	125.3	31.3	117.3	29.3
1000	128	39	102.8	31.8	94.8	29.5


Mechanical Data

Bowl Shaft Diameter (in) 1.5
Disch Sizes Available (in) 5,6,8
Motor Sizes Available (in) 6,8,10
K factor 4.9
Runout NPSHr (ft) 25

Max Sphere Size (in) 0.56
Impeller Eye Area (square inches) 12.56
Impeller Type enclosed
Bowl Pressure Limits (psig) 400

1 stg weight (lbs) 194
Add stage weight (lbs) 64
Impeller weight (lbs) 7
Bowl Diameter (in) 9.25
Max Diameter w/ Cable Guard (in) 9.75
1 stg length (in) 6-31.56,8-29.25
Add stage length (in) 8.5

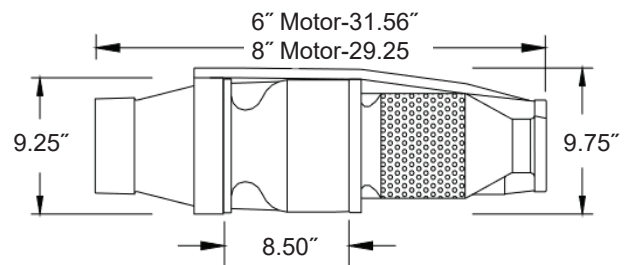

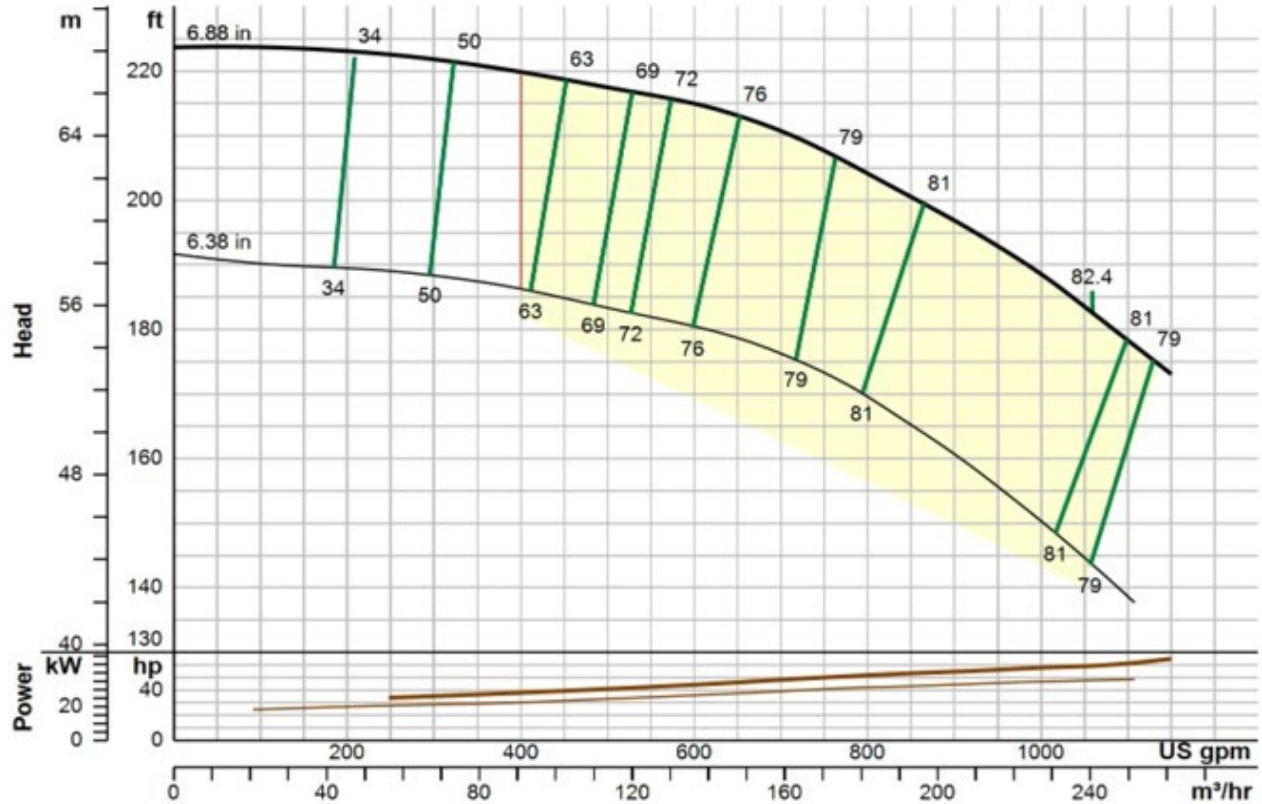

Curve reflects per stage performance for a minimum of 4 stages. For 1-3 stage units, refer to Wolf Pumps online catalog at PumpFlo Connect.

Tabled Performance Data


	6.88"		6.5"		6.38"	
GPM	TDH/STG	HP/STG	TDH/STG	HP/STG	TDH/STG	HP/STG
980	181.3	52.8	158.8	46.3	151.8	44.3
1000	179.5	53.3	157	46.8	150	44.8
1075	173	55.3	150	48.3	143	46.3
1150	165.3	56.5	142	49.3	135	47

Mechanical Data

Bowl Shaft Diameter (in) 1.5
Disch Sizes Available (in) 5,6,8
Motor Sizes Available (in) 6,8,10
K factor 4.9
Runout NPSHr (ft) 45

Max Sphere Size (in) 0.56
Impeller Eye Area (square inches) 12.56
Impeller Type enclosed
Bowl Pressure Limits (psig) 400

1 stg weight (lbs) 194
Add stage weight (lbs) 64
Impeller weight (lbs) 7
Bowl Diameter (in) 9.25
Max Diameter w/ Cable Guard (in) 9.75
1 stg length (in) 6-31.56,8-29.25
Add stage length (in) 8.5

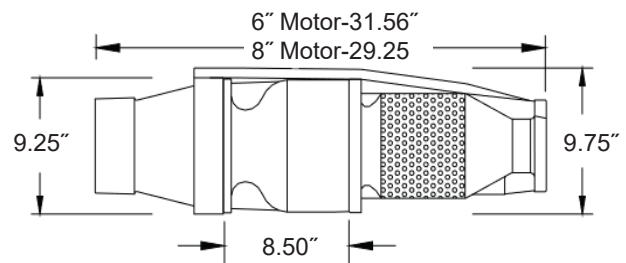

10" Pump Curve

pages 46 - 50

IMPELLERS *Trimmed and balanced to perfection*



- Every impeller is meticulously balanced to prevent vibration.
- Wolf Pumps is the only pump company to offer stainless steel open impellers in 4", 5", and 6".
- Impellers trimmed in 1/16" increments to meet every design point.

Precision impellers prevent early failure and optimize flow.

SHAFTS *Straightened, tested, and straightened again*



- Every shaft is cut to length and straightened before storage.
- Every shaft is tested again before pump assembly to ensure straightness.


Less shaft vibration for longer pump life.

BUSHINGS *Custom materials for your custom design*

Standard to proprietary options to provide protection in any condition.



Rubber, bronze, silicon carbide, and Vesconite options meet any application requirement.

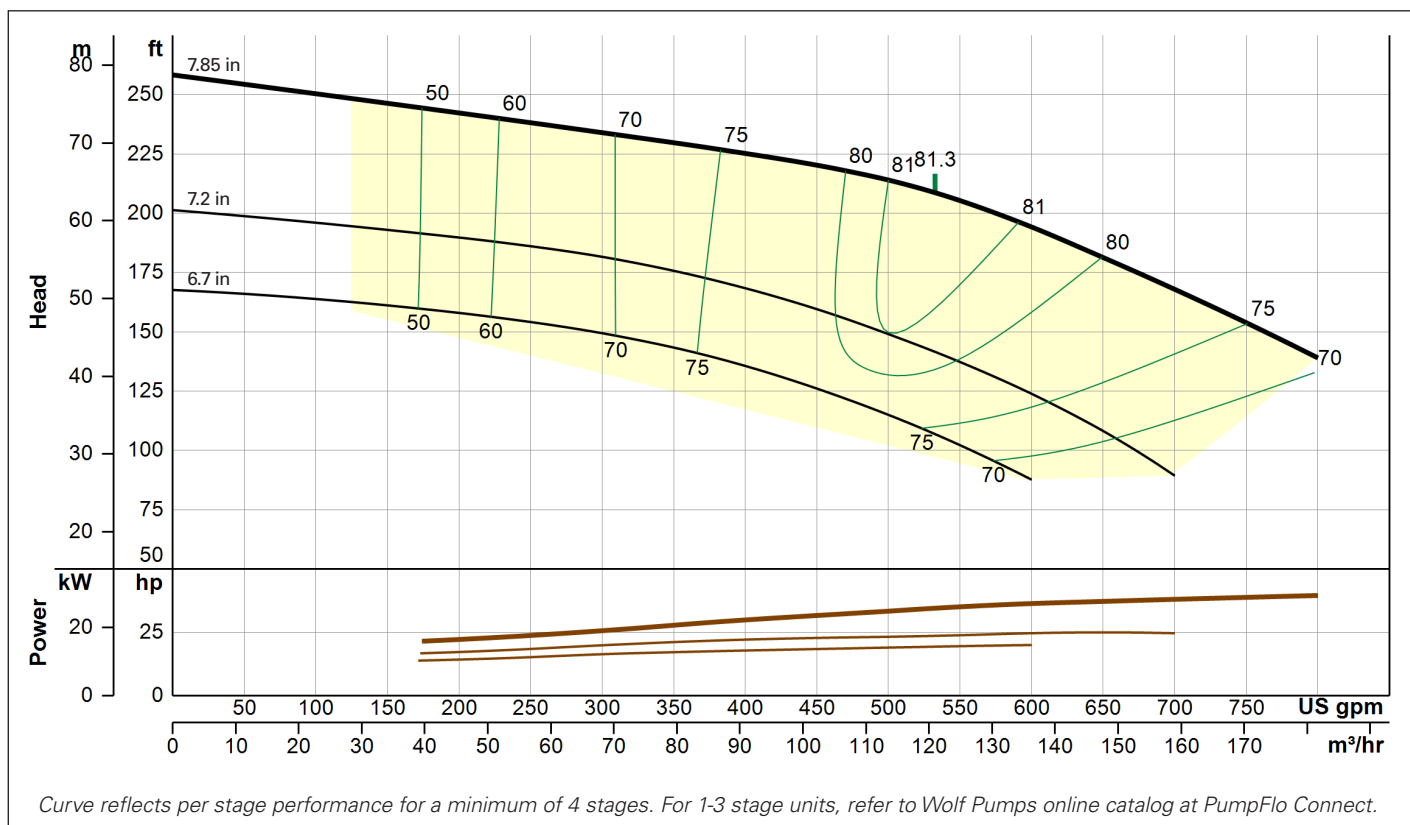


Tabled Performance Data

GPM	7.85"		7.2"		6.7"	
	TDH/STG	HP/STG	TDH/STG	HP/STG	TDH/STG	HP/STG
475	217.3	33.0	154.5	23.3	120.8	19.0
500	214.0	33.8	149.0	23.5	114.8	19.2
533	208.5	35.0	141.3	24.0	106.8	19.6
600	194.0	36.8	123.5	25.0	87.8	20.3


Mechanical Data

Bowl Shaft Diameter (in) 1.5
 Disch Sizes Available (in) 6" F - 8" F
 Motor Sizes Available (in) 6, 8, 10
 K factor 3.9
 Runout NPSHr (ft) 40
 1 stg weight (lbs) 173
 Add stage weight (lbs) 68
 Impeller weight (lbs) 9
 Bowl Diameter (in) 9.63
 Max Diameter w/ Cable Guard (in) 10.75
 1 stg length (in) 28.25
 Add stage length (in) 7.375

Max Sphere Size (in) 0.585
 Impeller Eye Area (square inches) 9.7
 Impeller Type enclosed
 Bowl Pressure Limits (psig) 325

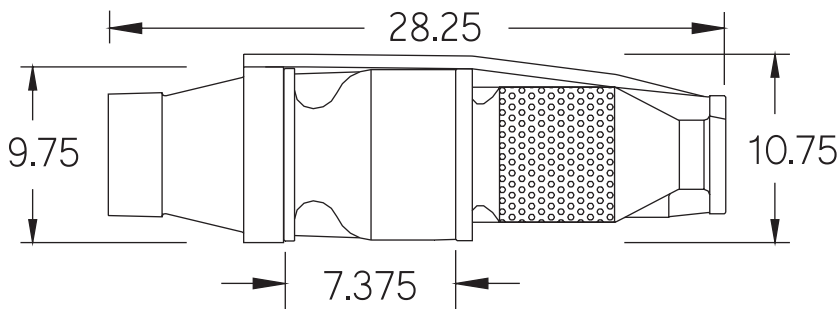

10" Pump Curves

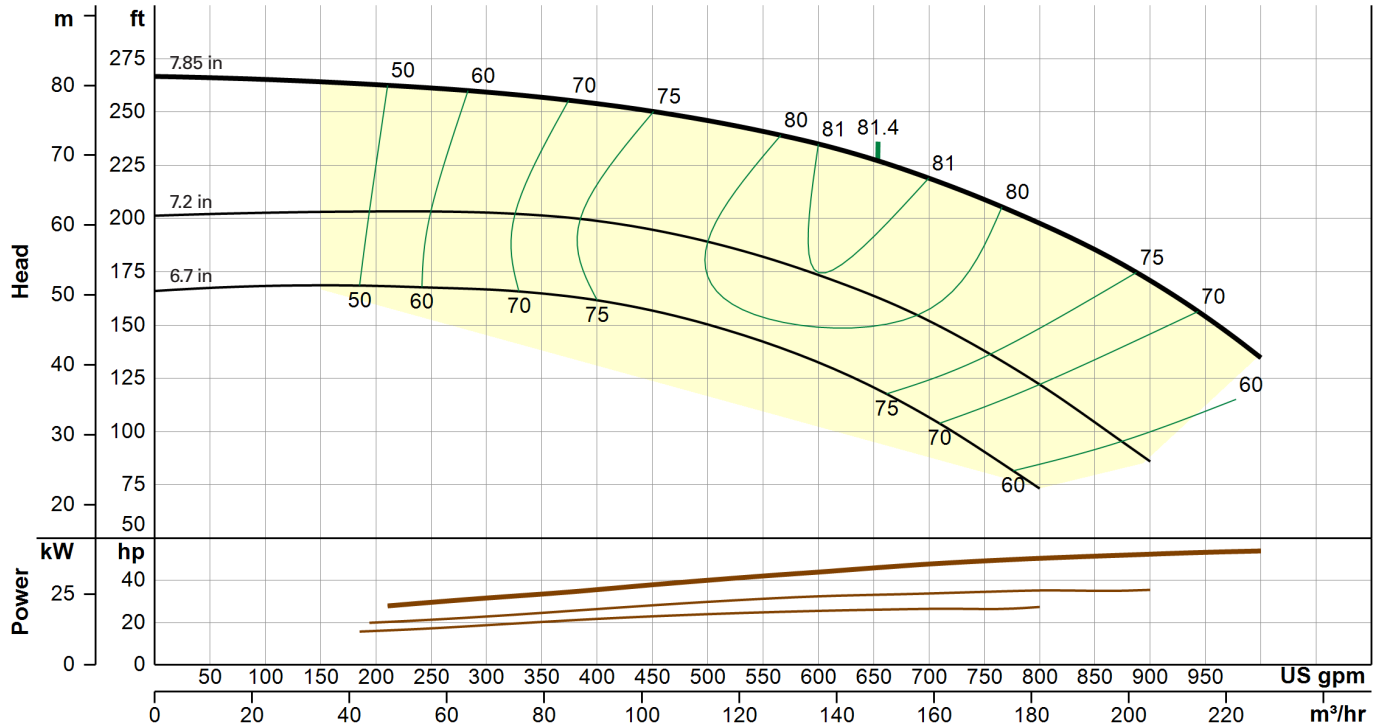

Curve reflects per stage performance for a minimum of 4 stages. For 1-3 stage units, refer to Wolf Pumps online catalog at PumpFlo Connect.

Tabled Performance Data


GPM	7.85"		7.2"		6.7"	
	TDH/STG	HP/STG	TDH/STG	HP/STG	TDH/STG	HP/STG
500	245.5	40.5	189.3	30.3	150.3	24.3
600	235.0	44.5	173.5	32.8	130.3	25.8
655	227.0	46.8	162.0	33.5	119.0	26.5
750	208.8	49.8	137.8	35.0	90.3	27.0


Mechanical Data

Bowl Shaft Diameter (in) 1.5
Disch Sizes Available (in) 6"F - 8"F
Motor Sizes Available (in) 6, 8, 10
K factor 4.0
Runout NPSHr (ft) 43

Max Sphere Size (in) 0.59
Impeller Eye Area (square inches) 9.67
Impeller Type enclosed
Bowl Pressure Limits (psig) 325

1 stg weight (lbs) 173
Add stage weight (lbs) 68
Impeller weight (lbs) 9
Bowl Diameter (in) 9.63
Max Diameter w/ Cable Guard (in) 10.75
1 stg length (in) 28.25
Add stage length (in) 7.375

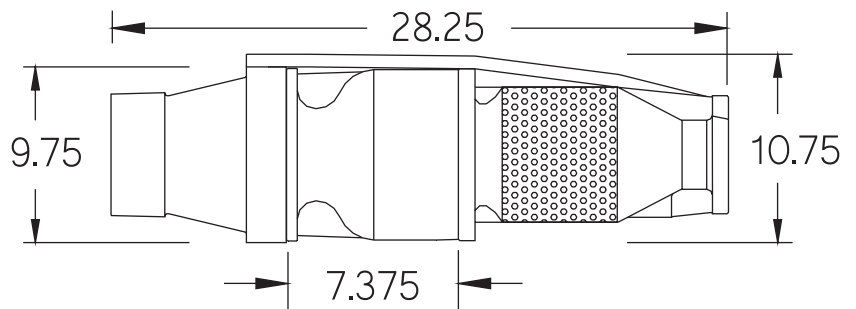

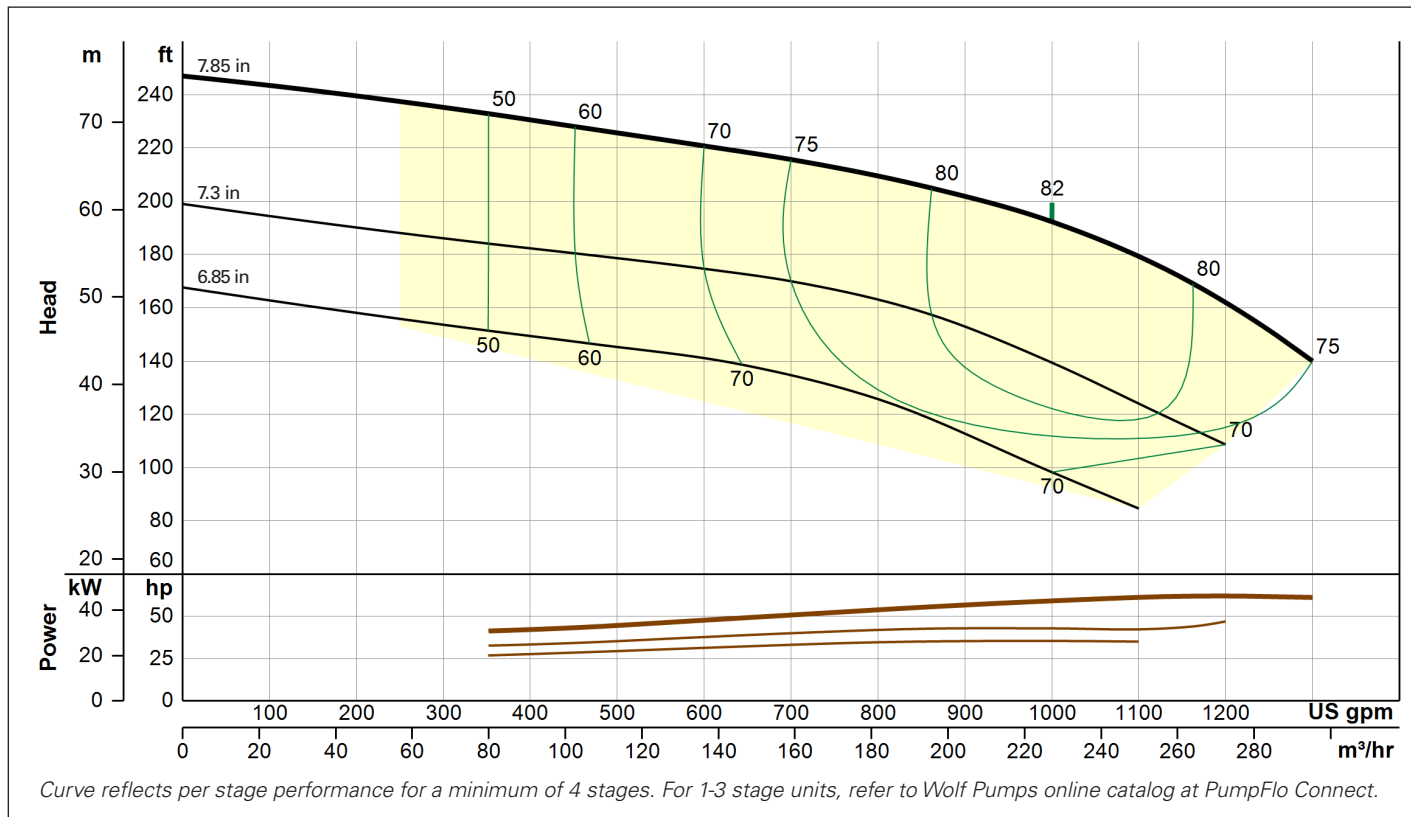


Tabled Performance Data

	7.85"		7.3"		6.85"	
GPM	TDH/STG	HP/STG	TDH/STG	HP/STG	TDH/STG	HP/STG
700	215.8	51.5	170.0	40.5	134.0	33.5
800	234.0	54.5	162.3	42.3	125.8	35.3
1000	192.3	60.0	139.4	43.5	98.3	36.0
1100	178.0	61.8	124.0	43.3	84.8	35.5


Mechanical Data

Bowl Shaft Diameter (in)	1.5
Disch Sizes Available (in)	6" F - 8" F
Motor Sizes Available (in)	6, 8, 10
K factor	5.5
Runout NPSHr (ft)	55
1 stg weight (lbs)	173
Add stage weight (lbs)	70
Impeller weight (lbs)	9
Bowl Diameter (in)	9.75
Max Diameter w/ Cable Guard (in)	10.75
1 stg length (in)	29.875
Add stage length (in)	8.625

Max Sphere Size (in)	0.78
Impeller Eye Area (square inches)	11.46
Impeller Type	enclosed
Bowl Pressure Limits (psig)	325

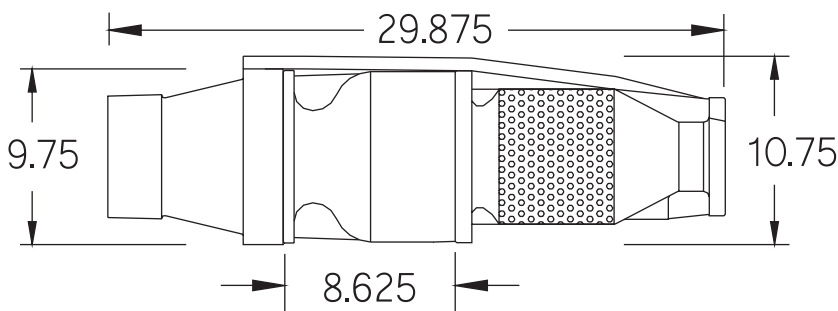

10" Pump Curves

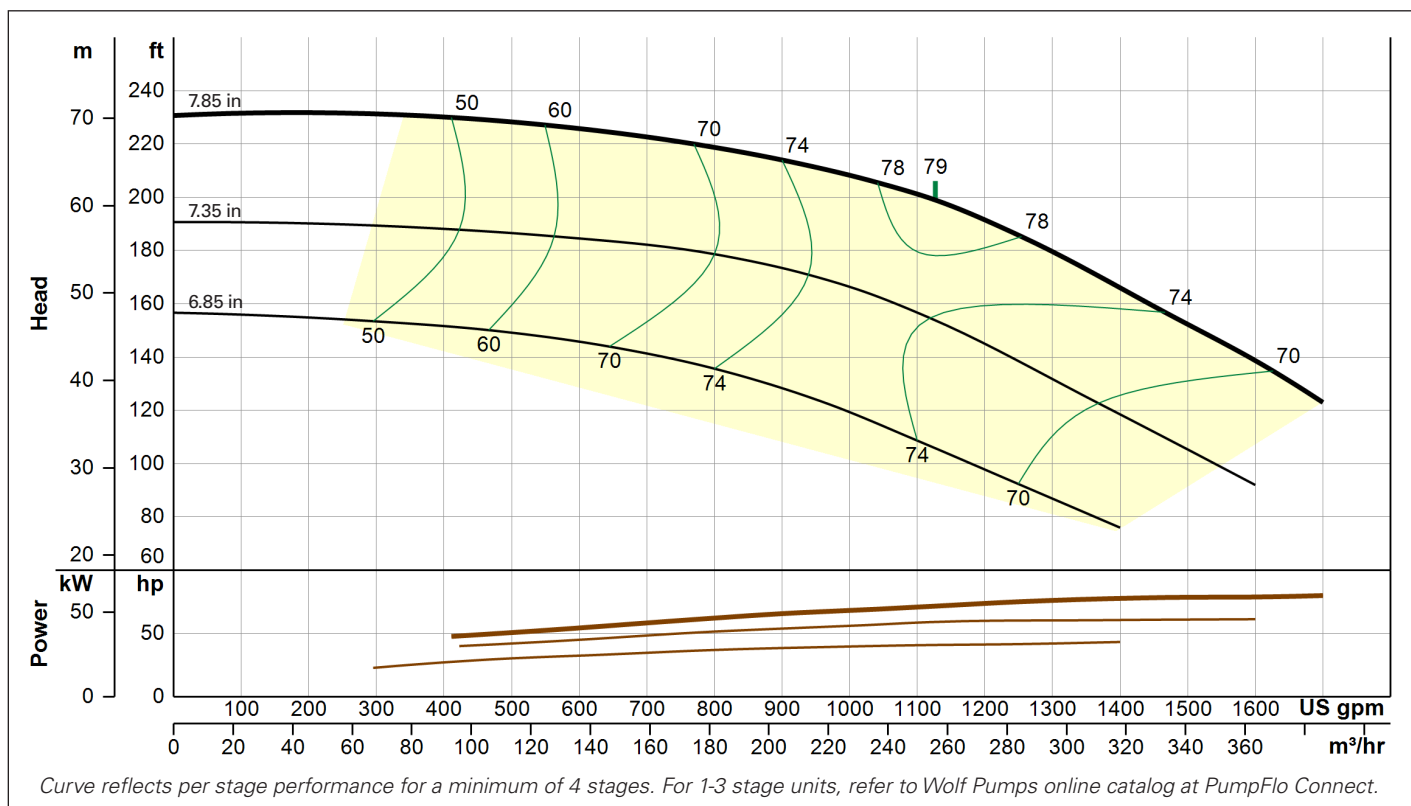

Tabled Performance Data


	7.85"		7.35"		6.85"	
GPM	TDH/STG	HP/STG	TDH/STG	HP/STG	TDH/STG	HP/STG
970	209.8	68.3	168.5	56.3	122.3	40.0
1020	206.8	69.5	164.8	57.3	117.0	40.5
1125	199.0	72.5	154.0	59.8	106.0	41.5
1250	185.8	76.0	137.8	60.8	92.3	42.3

Mechanical Data

Bowl Shaft Diameter (in) 1.5
Disch Sizes Available (in) 6" F - 8" F
Motor Sizes Available (in) 6, 8, 10
K factor 5.3
Runout NPSHr (ft) 60

Max Sphere Size (in) 0.81
Impeller Eye Area (square inches) 12.12
Impeller Type enclosed
Bowl Pressure Limits (psig) 325

1 stg weight (lbs) 173
Add stage weight (lbs) 70
Impeller weight (lbs) 9
Bowl Diameter (in) 9.75
Max Diameter w/ Cable Guard (in) 10.75
1 stg length (in) 29.875
Add stage length (in) 8.625

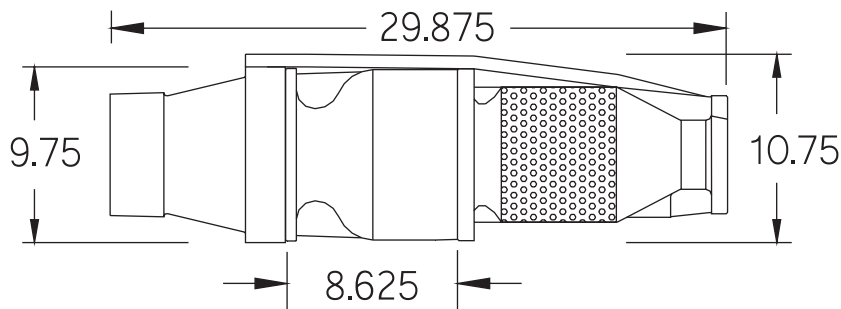

Accessories

pages 51-52




INVENTORY ON HAND FOR ANY NEED

Your Peace of Mind is Our Top Priority®

In most cases, Wolf can take an order and ship within 48 hours,
truly delivering on our promise:

Right Pump. Right Now. *What you need, when you need it.*

Clearview Sight Glass Nipple

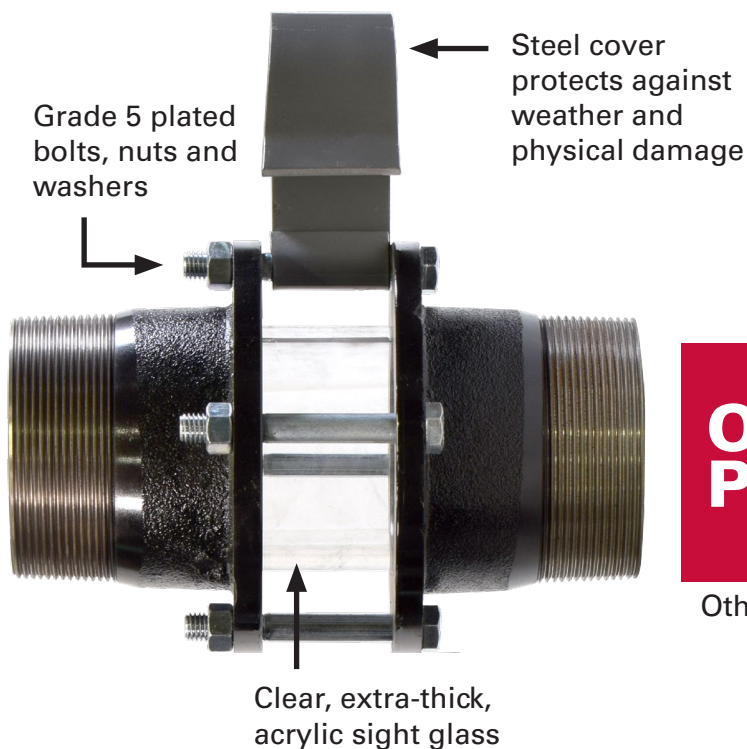

**Order
Part #**

Sight glass

WCVC 020 - 2"
 WCVC 025 - 2.5"
 WCVC 030 - 3"
 WCVC 040 - 4"
 WCVC 060 - 6"

Other sizes available

Accessories



Allows operators to observe water stream during pump operation.

- Clear, extra-thick, acrylic sight glass
- Grade 5 plated bolts, nuts and washers
- Close grained cast iron ends with NPT male connections
- O-ring on end of acrylic to prevent leakage
- Steel cover protects against weather and physical damage
- Available in 2", 3" and 4" male NPT connections standard (other sizes available)

Submittal Documents

pages 53-57

Right Pump. Right Now. *What you need, when you need it.*



Wolf is a family-owned, American company, born in the most abrasive, deep well water conditions of west Texas, delivering durable, custom pump solutions when and where you need them.

Wolf Pumps delivers:

- Customized, precision pump solutions
- Personal attention and quick shipping
- A 65-year reputation of excellence

That's the right solution, right when you need it.



To find the right pump for your application,
see our Sizing Tool at **WolfPumps.com**,
call **(800) 886-2606**
or email **info@WolfPumps.com**

Wolf Pumps • PO Box 490, 18014 N. I-27 Hwy • Abernathy, TX 79311 • WolfPumps.com

WOLF 
CUSTOMIZED PUMPS
Right Pump. Right Now.™



Right Pump. Right Now.

Submersible Turbine Pump Specifications

A. Scope

- i. This specification covers a water well submersible turbine pump set including bowl assembly, column pipe, well head, driver, and submersible cable. The pump shall be designed, manufactured, and tested in accordance with the latest applicable Hydraulic Institute and AWWA standards.

B. Acceptable Manufacturers

- i. The pump shall be the product of Wolf Pumps, Inc. of Abernathy, TX. Other manufacturers may be considered if proven to be equal in all respects. The successful manufacturer shall demonstrate the ability to conduct an in-house performance test for flow, head, horsepower, vibration, and efficiency prior to shipment.

C. Conditions of Service

- i. Flow: _____ Gallons per minute
- ii. TDH: _____ Feet
- iii. Minimum Efficiency: _____ Percent
- iv. Setting (Column length): _____ Feet
- v. Column pipe diameter: _____ Feet
- vi. Pumping Water Level: _____ Feet
- vii. Well diameter: _____ Inches

D. Pump Construction

- i. **Bowl Assembly:** Intermediate bowls shall be screw together type and made of ASTM A48 Class 30 cast iron with porcelain enamel lined water passages or unlined ASTM A536 65-45-12 ductile iron. All intermediate bowls shall be fitted with sleeve bushings of ASTM B571 C89835 bronze, Vesconite HiLube, or Nitrile rubber NBR/Buna-N materials. An NPT threaded discharge bowl to connect the pump end to the column pipe shall be furnished with an enclosed bearing bore [or a threaded discharge collar], and provisions shall be made to protect against excessive shaft vertical up thrust with a thrust ring made of ASTM B584 C932 bronze or UHMW Polyethylene, or with a thrust bolt assembly.
- ii. **Impellers:** Impellers shall be either enclosed or semi-open investment cast stainless steel ASTM A351-00/A743-06/A744-06, or bronze ASTM C876. They shall be dynamically balanced to grade G6.3 of ISO 1940 as a minimum and shall be attached to a pump shaft of stainless steel ASTM A582 S41600, chrome plated C1045 steel, or ionized stainless steel using tapered collets of ASTM A582 S41600 stainless steel.
- iii. **Motor Bracket:** The ductile iron ASTM A536 Gr. 60-40-18 motor bracket shall be furnished with an extra-long sleeve bushing of ASTM B571 C89835 bronze or Vesconite HiLube material and shall be fitted with a 304SS strainer with a net open area of at least four times the eye of the impeller.
- iv. **Sand Collar:** A sand collar of ASTM B584 C932 bronze shall be provided between the motor bracket bearing housing and the pump/motor coupling.
- v. **Coupling:** A shaft coupling of ASTM A582 S41600 shall be provided. This coupling will be capable of transmitting the total torque of the bowl assembly in either direction of rotation.
- vi. **Cable Guard:** A 304SS cable guard shall be provided to protect the motor leads between the motor mounting flange and the top of the bowl assembly. The cable guard shall be fastened to the bowl assembly with 304SS cable clamps of an appropriate size depending upon the maximum outside diameter of the bowl assembly.

E. Column Pipe

i. Column pipe shall be ASTM A53 standard wall thickness steel pipe furnished in lengths not to exceed 20 feet and connected by NPT steel couplings. Pipe shall be sized so that friction losses do not exceed 5 percent at the rated capacity of the pump.

F. Submersible Cable

i. Water and oil resistant submersible drop cable shall be sized to limit the voltage drop to 5% or less. The cable should have three separate conductors and a ground and shall be jacketed.

G. Discharge Head

i. The discharge head shall be made of fabricated steel and incorporate a long radius elbow welded to an ANSI class 150 flange. Discharge head shall be designed to accommodate the total weight of the pump, motor, discharge pipe, cable, and column of water. The base plate shall include a cable seal of adequate size to accommodate the cable, well vent, and water level indicator.

H. Submersible Motor

i. The motor shall be of the submersible type, capable of continuous operation at nameplate rating submerged under water at a maximum temperature of 3–5 degrees C ambient water temperature with a minimum of 1/2 foot per second cooling flow velocity past the motor. The motor must be suitable for “across the line” starting.

ii. The motor shall be rated at ____ HP, 3 phase, 60 Hz, ____ volt, 3600 RPM with a minimum Service Factor of 1.15. Minimum efficiency at full load shall be ____% inclusive of fully loaded thrust bearing. Minimum Power Factor at full load shall be ____%. The maximum actual motor diameter shall not exceed 5½ inch diameter at the stator casing.

iii. The motor shall be of the water filled, dry winding, encapsulated type. The winding shall be encapsulated in a high dielectric strength epoxy compound and hermetically sealed by a stainless-steel inner liner or can.

iv. The motor shall be filled with a 50/50 solution of clean, clear, potable water and FDA approved Food Grade propylene-glycol.

v. Motor material of construction shall be a 304ss stator casing with baked epoxy coated, cast iron mounting bracket and bottom end cover. The shaft shall be 410ss and all external fasteners shall be 304ss.

vi. The motor is to be totally enclosed, utilizing an elastomer expansion diaphragm for the equalization of internal and external pressure.

vii. The motor shall be equipped with a double rubber type seal to seal the motor at the point that the shaft extends through the mount bracket.


viii. Replaceable carbon composite sleeve type radial bearings shall be provided at each end of the rotor.

ix. The motor shall be equipped with a pivotal shoe type thrust bearing, with a carbon composite pad, capable of carrying the weight of all rotating elements plus the hydraulic thrust of the pump at shutoff head.

x. The motor shall be equipped for a plug-in type lead assembly. The lead assembly shall seal the lead conductors and the motor terminals from the surrounding environment. The assembly shall consist of one (1) set of three separate, continuous leads, and a grounding conductor. The motor leads shall have a minimum length of 15’.

xi. The 5 HP through 30 HP, 3-phase motors shall be dual voltage units equipped with a voltage plug connection to allow the rated voltage to be set at 230 volt or 460V by changing the voltage plug.

Dimensional Drawing Vertical Submersible

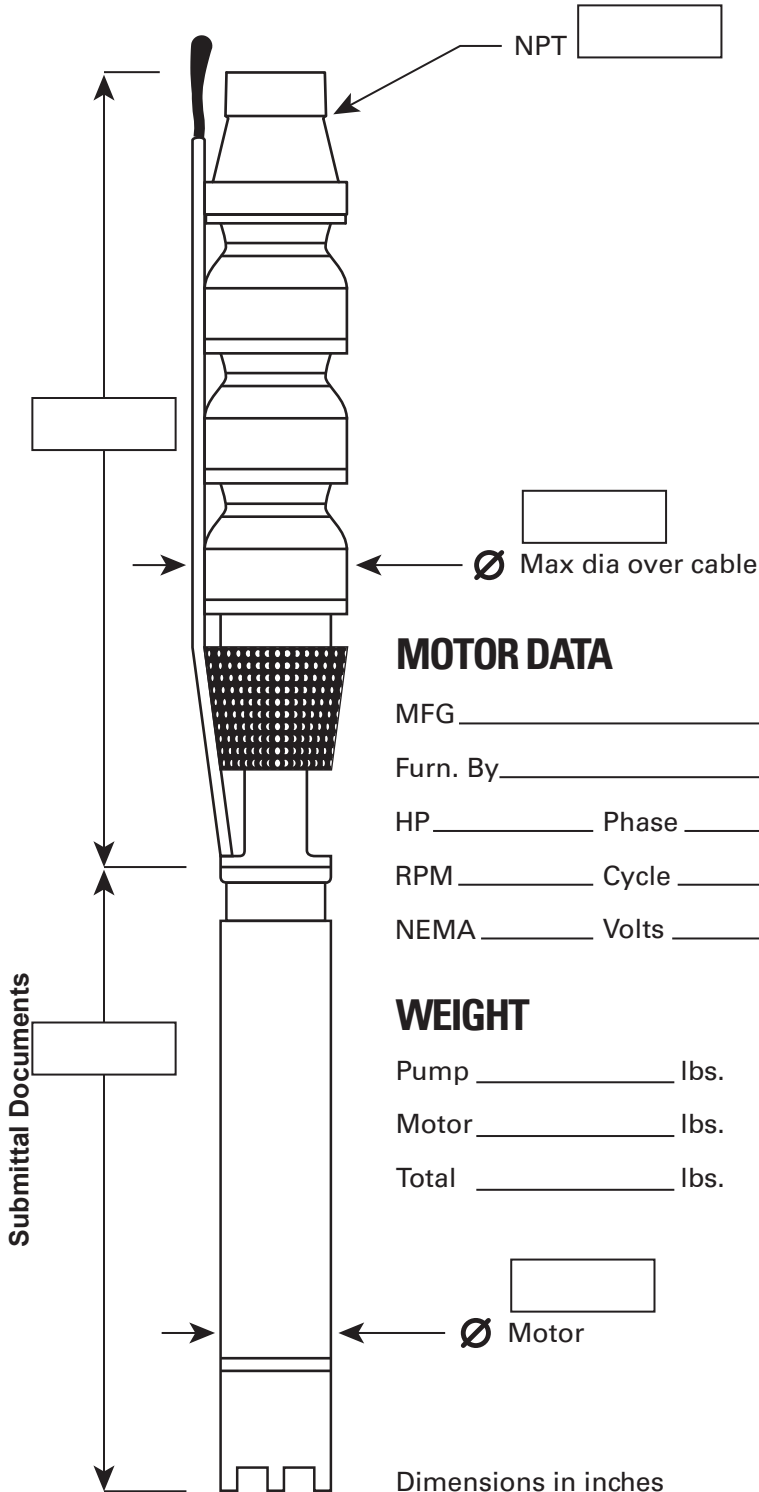

MOTOR DATA

MFG

Furn. By

HP Phase

RPM Cycle

NEMA Volts

WEIGHT

Pump lbs.

Motor lbs.

Total lbs.

Customer:

Customer PO:

Branch Order No.:

Item:

Pump Size	Stages	Imp. Dia.	BHP	Quantity
Liquid	GPM	TDH	Sp. Gr.	Temperature

Bowl Bearing	Bowl Shaft Dia.	Col. Size	No. of Col.

Special Construction


Certified Correct

☐ For Approval

☐ For Record

By Date

Dimensional Drawing Vertical Submersible

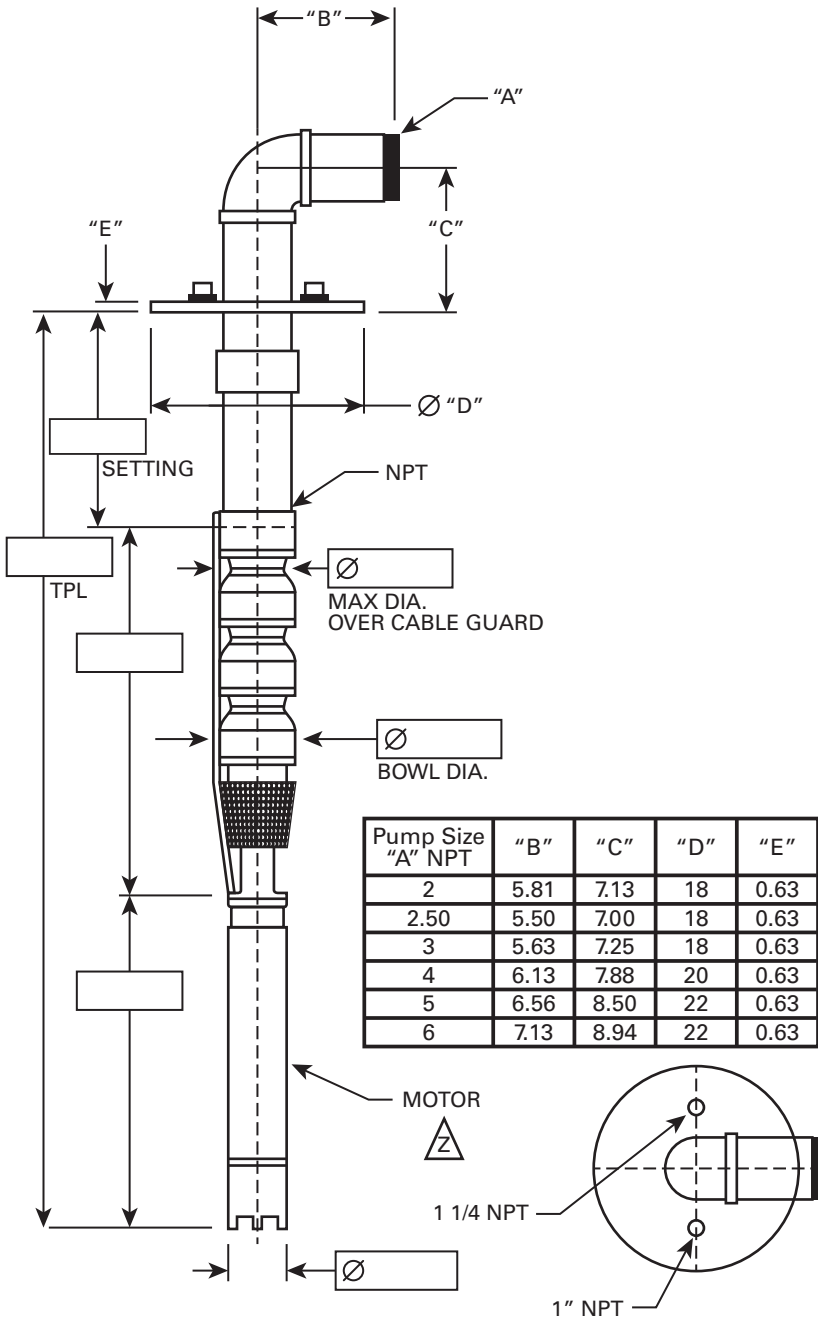

MOTOR DATA

MFG _____
Furn. By _____
HP _____ Phase _____
RPM _____ Cycle _____
NEMA _____ Volts _____

WEIGHT

Pump _____ lbs.
Motor _____ lbs.
Total _____ lbs.

Customer: _____

Customer PO: _____

Branch Order No.: _____

Item: _____

Service: _____

Pump Size	Stages	Imp. Dia.	BHP	Quantity
Liquid	GPM	TDH	Sp. Gr.	Temperature

Bowl Bearing	Bowl Shaft Dia.	Col. Size	No. of Col.

No. _____ NOTES

- All dimensions are in inches unless otherwise stated
- Velocity passed motor to insure proper cooling
= _____ Ft./sec.

Special Construction

Submittal Documents

Certified Correct

☐ For Approval

☐ For Record

By _____ Date _____

TESTED, PAINTED, AND PACKED



Right Pump. Right Now. *What you need, when you need it.*

Submersible Cable Chart

CABLE CHART – 60° C

Three Phase 60° C Cable, 60 Hz (Service Entrance to Motor) Maximum Length in Feet

Motor Rating		60° C Insulation - AWG Copper Wire Size														
Volts	HP	14	12	10	8	6	4	2	1	1/0	2/0	3/0	4/0	250	350	500
230V 60 Hz. Three Phase 3 Lead	5	140	230	370	590	920	1430	2190	2690	3290	4030	4850	5870	6650	8460	
	7.5	0	150	250	410	640	1010	1540	1900	2310	2840	3400	4120	4660	5910	7440
	10	0	0	180	300	470	740	1140	1410	1720	2110	2550	3090	3510	4500	5710
	15	0	0	0	200	320	510	790	970	1180	1450	1760	2120	2410	3080	3900
	20	0	0	0	0	240	390	600	750	920	1130	1370	1670	1900	2440	3100
	25	0	0	0	0	0	310	490	600	730	900	1100	1330	1510	1950	2480
	30	0	0	0	0	0	250	390	490	590	730	890	1080	1230	1580	2030

460V 60 Hz. Three Phase 3 Lead	5	590	950	1500	2360	3700	5750									
	7.5	410	670	1060	1670	2610	4060	6200	7610							
	10	300	480	770	1220	1910	2980	4580	5630	6900						
	15	0	330	530	840	1320	2070	3160	3890	4760	5840	7040				
	20	0	0	400	640	1020	1600	2460	3020	3710	4560	5500				
	25	0	0	0	520	810	1280	1960	2410	2960	3640	4400	5350			
	30	0	0	0	410	650	1030	1570	1950	2390	2940	3560	4330	4940		
	40	0	0	0	0	500	790	1220	1500	1840	2270	2730	3320	3760		
	50	0	0	0	0	0	610	940	1170	1430	1750	2110	2560	2910	3700	4690
	60	0	0	0	0	0	540	830	1020	1250	1540	1860	2250	2550	3260	4120
	75	0	0	0	0	0	0	660	820	1000	1230	1480	1810	2050	2640	3360
	100	0	0	0	0	0	0	0	610	750	930	1120	1360	1540	1990	2520
	125	0	0	0	0	0	0	0	0	0	770	920	1040	1270	1620	2040
	150	0	0	0	0	0	0	0	0	0	0	750	910	1040	1330	1680
	200	0	0	0	0	0	0	0	0	0	0	0	0	840	1070	1370

230V 60 Hz. Single Phase	5	0	0	170	260	430	680	1060	1330	1660	2070	2560				
	7.5	0	0	0	200	310	490	760	940	1150	1420	1740				
	10	0	0	0	0	220	340	520	660	810	1020	1250	1540			
	15	0	0	0	0	0	230	370	450	560	700	870	1080			

Lengths not in bold type meet the U.S. National Electrical Code ampacity for either individual conductors or jacketed 60° C cable.
Lengths in bold type meet the National Electric Code ampacity only for individual conductor 60° C cable, in free air or water.
If other cable is used, the National Electric Code as well as the local codes should be observed.

Submersible Cable Chart

CABLE CHART – 75° C

Three Phase 75° C Cable, 60 Hz (Service Entrance to Motor) Maximum Length in Feet

Motor Rating		75° C Insulation - AWG Copper Wire Size														
Volts	HP	14	12	10	8	6	4	2	1	1/0	2/0	3/0	4/0	250	350	500
230V 60 Hz. Three Phase 3 Lead	5	140	230	370	590	920	1430	2190	2690	3290	4030	4850	5870	6650	8460	
	7.5	0	150	250	410	640	1010	1540	1900	2310	2840	3400	4120	4660	5910	7440
	10	0	0	180	300	470	740	1140	1410	1720	2110	2550	3090	3510	4500	5710
	15	0	0	0	200	320	510	790	970	1180	1450	1760	2120	2410	3080	3900
	20	0	0	0	150	240	390	600	750	920	1130	1370	1670	1900	2440	3100
	25	0	0	0	0	190	310	490	600	730	900	1100	1330	1510	1950	2480
	30	0	0	0	0	0	250	390	490	590	730	890	1080	1230	1580	2030

460V 60 Hz. Three Phase 3 Lead	5	590	950	1500	2360	3700	5750									
	7.5	410	670	1060	1670	2610	4060	6200	7610							
	10	300	480	770	1220	1910	2980	4580	5630	6900						
	15	0	330	530	840	1320	2070	3160	3890	4760	5840	7040				
	20	0	0	400	640	1020	1600	2460	3020	3710	4560	5500				
	25	0	0	320	520	810	1280	1960	2410	2960	3640	4400	5350			
	30	0	0	0	410	650	1030	1570	1950	2390	2940	3560	4330	4940		
	40	0	0	0	320	500	790	1220	1500	1840	2270	2730	3320	3760		
	50	0	0	0	0	390	610	940	1170	1430	1750	2110	2560	2910	3700	4690
	60	0	0	0	0	0	540	830	1020	1250	1540	1860	2250	2550	3260	4120
	75	0	0	0	0	0	430	660	820	1000	1230	1480	1810	2050	2640	3360
	100	0	0	0	0	0	0	490	610	750	930	1120	1360	1540	1990	2520
	125	0	0	0	0	0	0	0	0	620	770	920	1040	1270	1620	2040
	150	0	0	0	0	0	0	0	0	0	620	750	910	1040	1330	1680
	200	0	0	0	0	0	0	0	0	0	0	610	740	840	1070	1370

230V 60 Hz. Single Phase	5	0	100	170	260	430	680	1060	1330	1660	2070	2560	3190			
	7.5	0	0	120	200	310	490	760	940	1150	1420	1740	2120			
	10	0	0	0	140	220	340	520	660	810	1020	1250	1540			
	15	0	0	0	0	140	230	370	450	560	700	870	1080			

Lengths not in bold type meet the U.S. National Electrical Code ampacity for either individual conductors or jacketed 75° C cable.
Lengths in bold type meet the National Electric Code ampacity only for individual conductor 75° C cable, in free air or water.
If other cable is used, the National Electric Code as well as the local codes should be observed.



Right Pump. Right Now.®

Friction Loss Tables

COLUMN FRICTION LOSS

STEEL

SUBMERSIBLE PUMPS – Loss in Feet Per 100 Feet of Column – 0-2000 GPM

U.S. Gallons Per Min.	COLUMN SIZE — INCHES								U.S. Gallons Per Min.
	2½	3	4	5	6	8	10	12	
25									25
30									30
35	1.15								35
40	1.47								40
45	1.84								45
50	2.23	0.76							50
60	3.14	1.06							60
70	4.18	1.41							70
80	5.36	1.82							80
90	6.70	2.26							90
100	8.19	2.76	0.72						100
120	11.50	3.88	1.10						120
140	15.50	5.19	1.35						140
160	20.00	6.69	1.71	0.56					160
180	25.20	8.40	2.41	0.70					180
200	30.70	10.25	2.61	0.85					200
220	37.10	12.30	3.13	1.01	0.41				220
240	43.8	14.5	3.69	1.19	0.48				240
260		16.9	4.30	1.38	0.56				260
280		19.5	4.95	1.55	0.65				280
300		22.1	5.62	1.82	0.73				300
350		30.0	7.54	2.43	0.98				350
400			9.75	3.13	1.25	0.32			400
450			12.25	3.91	1.56	0.40			450
500			14.95	4.78	1.91	0.48			500
600				6.76	2.69	0.69			600
700				9.10	3.60	0.92	0.29		700
800				11.75	4.63	1.17	0.38		800
900				14.82	5.81	1.46	0.47	0.20	900
1000				18.15	7.10	1.79	0.58	0.24	1000
1100					8.52	2.15	0.69	0.29	1100
1200					10.10	2.53	0.81	0.34	1200
1300					11.70	2.94	0.94	0.40	1300
1400					13.58	3.39	1.10	0.46	1400
1500						3.88	1.23	0.52	1500
1600						4.39	1.39	0.59	1600
1700						4.93	1.56	0.66	1700

COLUMN FRICTION LOSS

PVC

GPM	3"		4"		6"		8"		10"	
	Ft.	Lbs.	Ft.	Lbs.	Ft.	Lbs.	Ft.	Lbs.	Ft.	Lbs.
1										
2										
3										
4										
5										
6										
8										
10										
15										
20	0.13	0.056								
25	0.19	0.083								
30	0.26	0.114								
35	0.35	0.151	0.09	0.041						
40	0.44	0.191	0.12	0.052						
45	0.55	0.239	0.15	0.064						
50	0.66	0.288	0.17	0.076						
60	0.93	0.406	0.25	0.107						
70	1.24	0.540	0.33	0.143						
80	1.58	0.687	0.41	0.180						
90	1.98	0.861	0.52	0.224						
100	2.42	1.05	0.63	0.272	0.08	0.036				
125	3.80	1.65	0.95	0.415	0.13	0.055				
150	5.15	2.24	1.33	0.580	0.18	0.077				
175	6.90	3.00	1.78	0.774	0.23	0.102				
200	8.90	3.87	2.27	0.985	0.30	0.130				
250			3.36	1.460	0.45	0.195	0.12	0.051		
300			4.85	2.11	0.63	0.275	0.17	0.072		
350			6.53	2.84	0.84	0.367	0.22	0.095		
400					1.08	0.471	0.28	0.121		
500					1.66	0.720	0.42	0.182	0.14	0.059
550					1.98	0.861	0.50	0.219	0.16	0.071
600					2.35	1.02	0.59	0.258	0.19	0.083
700							0.79	0.343	0.26	0.112
800							1.02	0.443	0.33	0.143
900							1.27	0.554	0.41	0.179
950									0.46	0.198
1000									0.50	0.218

Reference

UNITS OF FLOW

Units	U.S. Gallons Per Minute	Million U.S. Gallons Per Day	Cubic Feet Per Second	Cubic Meters Per Hour	Liters Per Second
1 U.S. Gallon Per Minute	1	.001440	.00223	.2270	.0631
1 Million U.S. Gallons Per Day	694.5	1	1.547	157.73	43.8
1 Cubic Foot Per Second	448.8	.646	1	101.9	28.32
1 Cubic Meter Per Hour	4.403	.00634	.00981	1	.2778
1 Liter Per Second	15.85	.0228	.0353	3.60	1

UNITS OF POWER

Units	Horsepower	Ft. – Lbs. Per Minute	Watts	Kilowatts	Metric Horsepower	B.T.U. Per Minute
1 Horsepower	1	33,000	746	.746	1.014	42.4
1 Ft. – Lb. Per Minute	.0000303	1	.0226	.0000226	.0000307	.001285
1 Watt	.001340	44.2	1	.001	.001360	.0568
1 Kilowatt	1.341	44.250	1000	1	1.360	56.8
1 Metric Horsepower	.986	32,550	736	.736	1	41.8
1 B.T.U. Per Minute	.0236	778.4	176	.0176	.0239	1

UNITS OF LENGTH

Reference

Units	1 Centimeter	1 Inch	1 Foot	1 Yard	1 Mile	1 Meter	1 Kilometer
1 Centimeter	1	.3937	.0328	.01094	.000006214	.01	.00001
1 Inch	2.54	1	.0833	.0278	.00001578	.0254	.0000254
1 Foot	30.48	12	1	.333	.0001894	.3048	.0003048
1 Yard	91.44	36	3	1	.0005682	.9144	.0009144
1 Mile	160,934.4	63,360	5,280	1,760	1	1,609	1.61
1 Meter	100	39.37	3.281	10.93613	.0006214	1	.001
1 Kilometer	100,000	39,370.08	3,280.84	1,093.613	.621371	1,000	1

UNITS OF PRESSURE AND HEAD

Units	Lbs. Per Square Inch	Feet of Water	Meters of Water	Inches of Mercury	Atmo-spheres	Kilograms Per Sq. C.M.
1 Lb. Per Square Inch	1	2.31	.704	2.04	.0681	.0703
1 Foot of Water	.433	1	.305	.882	.02947	.0305
1 Meter of Water	1.421	3.28	1	2.89	.0967	.1
1 Inch of Mercury	.491	1.134	.3456	1	.0334	.0345
1 Atmosphere (at Sea Level)	14.70	33.93	10.34	29.92	1	1.033
1 Kilogram Per Sq. C.M.	14.22	32.8	10	28.96	.968	1

Equivalent units are based on density of fresh water from 32° to 62° F.

Equivalent units are based on density of mercury from 32° to 62° F, sufficient accuracy.

Each 1,000 feet of ascent decreases pressure about ½ lb./square inch.

UNITS OF VOLUME AND WEIGHT

Units	U.S. Gallons	Imperial Gallons	Cubic Inches	Cubic Feet	Acre Feet	Pounds	Cubic Meters
1 U.S. Gallon	1	.833	231	.1337	.00000307	8.35	.003785
1 Imperial Gallon	1.201	1	277.4	.1605	.00000369	10.02	.004546
1 Cubic Inch	.00433	.00360	1	.000579	—	.0361	—
1 Cubic Foot	7.48	6.23	1728	1	.0000230	62.4	.02832
1 Acre-Foot	325.850	271,335	—	43,560	1	—	1233.5
1 Pound*	.120	.0998	27.7	.0160	—	1	—
1 Cubic Meter	264.2	220	61,023	35.314	.000811	2205	1
1 Liter	.2642	.220	61.023	.0353	—	2.205	—

* Weights shown based on maximum density of fresh water at 39° F.

UNITS OF SURFACE AREA

Units	Square Inch	Square Feet	Square Yard	Acres	Square Miles	Square Centimeters	Square Meters	Hectares
1 Square Inch	1	.00694	.00077	—	—	6.452	—	—
1 Square Foot	144	1	.111	—	—	929	.0929	—
1 Square Yard	1296	9	1	.000207	—	8361	.0836	—
1 Acre	—	43.500	4840	1	.00156	—	4049	0.405
1 Square Mile	—	27.9 x 10 ⁶	3,097,600	640	1	—	2.58 x 10 ⁶	258
1 Square Centimeter	.155	.001076	—	—	—	1	.0001	1 x 10 ⁸
1 Square Meter	1549	10.76	1.196	.000247	—	10.000	1	.0001
1 Hectare	—	107.639	11.960	2.471	.00386	1 x 10 ⁸	10.000	1

Reference

Company Policy

pages 64-67

**From our family to yours,
thank you for your business.**



Credit Terms and Payments

GENERAL

Credit terms are subject to the approval of the Credit Department. The Credit Department will do everything possible to assist our valued customers.

CREDIT LINES

Most customers will have a line of credit established through the use of any or a combination of the following:

- Financial statement analysis
- Dunn & Bradstreet rating and payment record or Manufacturers Clearing House records.
- Bank references
- Trade references
- Other references or measure, if necessary.

PAYMENT TERMS

All items shipped are subject to the terms as stated on the face of the invoice. The due date is to be calculated from the invoice date.

DISPOSITION OF ORDERS

Payment arrangements for past due balances must be made with the Credit Department. We retain the right to suspend shipments until an equitable payment agreement has been reached.

INVOICE ADJUSTMENT

In order to maintain the account in a current status, all invoices should be paid by the due date. Pending adjustments should be deducted on the remittance, with an explanation for the deduction attached to the remittance advice.

Return Goods - New Products

GENERAL

This policy outlines the procedures for material returned for credit to assist in a prompt, accurate credit.

QUALIFICATION

All products returned in like-new condition are subject to inspection. Products must be securely packaged to reach the destination without damage.

A notice will be mailed to the customer when returned products are received. Unauthorized or unacceptable returns will be scrapped if the customer does not reply about disposition within 30 days of the notice.

RETURN PROCEDURE

Products may be returned if:

- Prior written consent of the Customer Service Manager or National Sales Manager.
- Transportation costs are paid by the purchaser.
- The normal restocking charge is 20% of the net invoice or \$25.00 minimum.
- Product returned does not exceed 10% of previous year's net purchases.

The following materials are not returnable for credit:

- Special items manufactured to order.
- Obsolete items not carried in inventory.
- Items shipped one year or more prior to date of request for permission to return.

MISTAKES - SHIPPED IN ERROR

If a mistake is made by:

- Wolf Pump - Customer must advise Wolf within 30 days. A credit will be issued for all shipping and handling expenses for return.
- Customer - Returns will be accepted if shipped back prepaid and subject to 20% restocking charge, authorization and routing instructions.

Warranty

Wolf Pumps warrants to the original consumer of the products (if manufacturer's) that the products will be free from defects in material and workmanship for the warranty period of one year from the date of installation.

Our warranty will not apply to any product that has been subject to negligence, misapplication, improper installation or maintenance.

Buyer's only remedy and Wolf Pumps' only duty is to repair or replace defective products (at Wolf Pumps' choice). For avoidance of doubt, Wolf Pumps' warranty liability shall not exceed the total cost of the product. Buyer agrees to pay all labor and shipping charges associated with this warranty and to request warranty service through the installing dealer as soon as a problem is discovered. If warranty service is requested more than 30 days after the warranty period has ended, it will not be honored. Wolf Pumps reserves the right to inspect all warranty claim products prior to authorizing credit or replacement.

WOLF PUMPS SHALL NOT BE LIABLE FOR ANY CONSEQUENTIAL, INCIDENTAL, OR CONTINGENT DAMAGES WHATSOEVER.

THE FOREGOING WARRANTIES ARE EXCLUSIVE AND IN LIEU OF ALL OTHER EXPRESSED WARRANTIES. IMPLIED WARRANTIES, INCLUDING BUT NOT LIMITED TO THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, SHALL NOT EXTEND BEYOND THE WARRANTY PERIOD PROVIDED HEREIN.

Certain states do not permit the exclusion or limitation of incidental or consequential damages or the placing of limitations on the duration of an implied warranty, therefore, the limitations or exclusions herein may not apply. This warranty sets forth specific legal rights and obligations, however, additional rights may exist, which may vary from state to state.

Neither Company nor its suppliers shall be liable, whether in contract or in tort or under any other legal theory, for loss of use, revenue or profit, or for cost of capital or of substitute use or performance, or for incidental, indirect, or special or consequential damages, or for any other loss or cost of similar type, or for claims by Purchaser for damages of Purchaser's customers. Likewise, Company shall not under any circumstances be liable for the fault, negligence, or wrongful acts of Purchaser or Purchaser's employees, or Purchaser other contractors or suppliers.

WOLF PUMPS

PO Box 490

Abernathy, TX 79311-0490

Freight and Shipping Policy

FREIGHT TERMS AND CONDITIONS

The term F.O.B. (Freight on Board) will mean the following for all orders shipped from the factory or the distribution centers:

- F.O.B. Shipping Point - Without regard to who pays any freight charges, the risk of loss lies with the customer. Wolf Pump will always ship F.O.B. shipping point unless stipulated otherwise by the Customer Service Manager or National Sales Manager.
- F.O.B. Destination - Without regard to who pays any freight charges, Wolf Pump assumes risk of loss until goods are delivered at the designated destination.

Note that payment of freight charges has been separated from the risk of loss. This is incumbent upon the purchasing party to make certain all shipments leaving the factory or the distribution center as "F.O.B. Shipping Point" are adequately insured, and that proper inspections, etc. are effected upon delivery of goods. Unless otherwise noted on quote or order confirmation, freight charges will be prepaid and added to the invoice.

Payment of freight charges will fall into one of the following classifications depending upon circumstances regardless of the F.O.B. option specified.

- Pre-paid (PPD) - Wolf Pump pays all freight charges for orders classified PPD. Examples are stock orders meeting the minimum qualifying amounts or special orders where Wolf Pump assumes payment responsibility.
- Pre-paid and Added to Invoice (PPA) - Wolf Pump pays the freight charges upon shipment. However, the charges will be included on the invoice for the items shipped and the customer will then reimburse Wolf Pump.
- Collect (COL) - Wolf Pump will not pay any freight charges for the shipment. The receiving party will pay the charges when the goods are delivered.

SHIPMENT ROUTING

Prepaid shipments will be routed via contract carriers. Collect shipments will be routed via contract carriers unless otherwise specified by customer. Routing must be specified at time of order submission. Best service and volume discount will be obtained if the selection of carrier is left to Wolf Pump Distribution Services. Routing requests are also limited by the capabilities and limitations of the various modes of transportation. All transit times are approximations.

INSURANCE

Common carriers are obligated to assume responsibility for goods they carry. The dollar limit varies by the carrier. For example: UPS orders greater than \$100.00 are not covered (they are a small package carrier) unless we declare the value when shipping.

F.O.B. Origin (Common Carrier) - The common carrier assumes responsibility for the goods he transports and customers must recover damages from the carrier.

LOST SHIPMENTS

Wolf Pump's responsibility on all surface and air freight shipments extends to actual shipping of the order. Tracing or follow up is the responsibility of the customer and the carrier. Nevertheless, you may always expect our full cooperation in helping to locate lost material. After allowing a reasonable amount of time for delivery, contact the Customer Service Department for tracing assistance.

- Truck Shipment - Wolf Pump will provide you with the pro number, tracer number and details for the customer to trace the shipments through the carrier at the destination.
- Air Freight and Air Express - Wolf Pump will provide the waybill number and details for tracing through the carrier at the destination.
- UPS - Wolf Pump will initiate tracers through UPS. Tracers normally require thirty (30) days.




Notes

This image shows a single sheet of white paper with horizontal ruling lines. The lines are evenly spaced and run across the width of the page. There are no margins, text, or other markings on the paper.

TESTING *Tested here for your success out there*

- Pumps tested from 230V single phase to 6600V 3phase
- Testing includes vibration analysis, phase imbalance and stabilized motor temperature
- Remote testing is available, allowing customers to view their pumps during the test process, from anywhere in the world
- Every pump (up to 500HP) is wet-tested before it leaves the factory, ensuring every pump works the first time, every time.

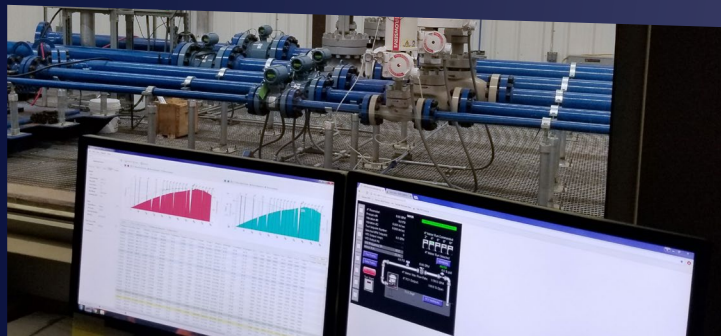

- Skilled sales team to size and quote product needs quickly
- Committed to carrying inventory for the entire season
- Expert machinists and assemblers provide quality, custom pumps fast



Right Pump. Right Now. *What you need, when you need it.*

DOE Compliance

PUMP MODEL	Impeller Dia.	P.E.I.
5LL5V	4.125"	0.89
5LL8V	4.125"	0.87
5ML6V	4.515"	0.99
5MM6V	4.515"	0.93
5MM8V	4.515"	0.91
5MH6V	4.515"	0.98

PUMP MODEL	Impeller Diameter	P.E.I.
5MH7V	4.515"	0.96
5HH7V	4.125"	0.93
5HX7V	4.515"	0.87
6LL6V	4.515"	0.93
6LM6V	4.515"	0.88
6LM8V	4.515"	0.88

PUMP MODEL	Impeller Diameter	P.E.I.
6LH6V	4.515"	0.93
6LH7V	4.515"	0.91
6MM8V	4.75"	0.87
6HH7V	4.515"	0.99
6LH7V-SS	4.515"	0.96
6LM6V-SS	4.515"	0.92

WOLF 
CUSTOMIZED PUMPS
Right Pump. Right Now.®



As a family-owned, American company, born in the most abrasive, deep well water conditions of west Texas, Wolf focuses on each customer to build perfectly matched pumps to their exact requirements.

With our expertise, world-class testing, speed of delivery and personal attention, Wolf delivers durable, custom pump solutions when and where you need them.

PO Box 490
18014 N I-27 Hwy.
Abernathy, TX 79311
800-886-2606
WolfPumps.com

WOLF 
CUSTOMIZED PUMPS
Right Pump. Right Now.®